

2017 EDITION

Starmaxx Passenger, Light Truck and 4x4-SUV Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.

DISTRIBUTED BY



starmaxx PCR-4X4-LTR & WINTER TIRES



# PCR-4X4-LTR & WINTER TIRES



#### Headquarters - Factory

Petlas Tire Industry and Trade Kırşehir - Kayseri Devlet Yolu Üzeri Gölhisar Mevkii 7. km Kırşehir / TURKEY T. +90 386 252 65 50 F.+90 386 252 65 70

#### Int. Sales & Marketing

Petlas Tire Industry and Trade Kazım Karabekir Cd. Özcan Plaza No.124 06060 Ankara / TURKEY T. +90 312 309 30 30 F.+90 312 310 95 09

#### USA Sales Office

11111 E.Lincolnway STE 205 Cheyenne, WY 82001 USA

[www.starmaxx.com](http://www.starmaxx.com) **MADE IN TURKEY**

 **starmaxx**  
HIGH PERFORMANCE TIRES

 **starmaxx**  
HIGH PERFORMANCE TIRES

# CONTENTS

## 2 / Range of Starmaxx Tires

Passenger Tires  
SUV, 4x4 Tires  
LTR Tires

## 4 / Starmaxx Tires by Size

## 8 / General Information

Sidewall Markings  
Radial Tire Construction  
Important Definitions Related  
Dimensions  
Speed Index Table  
Load Index Table

## 64 / Technical Table

PCR Tires  
SUV, 4x4 Tires  
LTR Tires

### Passenger Tires

ST 330	ST 532	ST 542	ST 552	ST 562	ST 730	ST 740	ST 750	ST 760	W 810	W 850
16	18	20	22	24	26	28	30	32	36	38

### SUV, 4X4 Tires

ST 430	ST 440	ST 450	W 870
42	44	46	48

### LTR Tires

ST 850	ST 850 Plus	ST 860	ST 900	ST 950	ST 960
52	54	56	58	60	62

## RANGE OF TIRES

### Passenger Tires



TOLERO ST 330



ULTRASPORT ST 740



NOVARO ST 532



ULTRASPORT ST 750



NATUREN ST 542



ULTRASPORT ST 760



NOVARO ST 552



ICEGRIPPER W810



NATUREN ST 562



ICEGRIPPER W850



ULTRASPORT ST 730

## SUV, 4x4 Tires



INCURRO ST 430 A/S



INCURRO ST 440 A/T



INCURRO ST 450 H/T



INCURRO W870

## LTR Tires



PROVAN ST 850



PROVAN ST 850 PLUS



PROVAN ST 860



PROTERRA ST 900



PROWIN ST 950



PROWIN ST 960

## TIRES BY SIZE

### Tolero ST 330

155/80 R12  
 155/80 R13  
 165/80 R13  
 165/80 R13 RF  
 175/80 R14  
 165/80 R15  
 145/70 R12  
 155/70 R12  
 165/70 R12  
 175/70 R12  
 145/70 R13  
 155/70 R13  
 165/70 R13  
 165/70 R13 RF  
 175/70 R13  
 185/70 R13  
 165/70 R14  
 165/70 R14 RF  
 175/70 R14  
 175/70 R14 RF  
 185/70 R14  
 195/70 R14  
 195/70 R15 RF  
 155/65 R13  
 165/65 R13  
 175/65 R13  
 155/65 R14  
 165/65 R14  
 175/65 R14  
 175/65 R14 RF  
 185/65 R14  
 195/65 R14  
 175/65 R15  
 185/65 R15  
 195/65 R15 RF  
 195/65 R15 RF  
 165/60 R14



### Novaro ST 532

175/70 R13  
 175/70 R14  
 175/70 R14 RF  
 185/70 R14  
 175/65 R14  
 175/65 R14 RF  
 185/65 R14  
 175/65 R15  
 185/65 R15  
 185/65 R15 RF  
 195/65 R15  
 195/65 R15 RF  
 205/65 R15  
 215/65 R15  
 205/65 R16  
 215/65 R16  
 185/60 R14  
 195/60 R14  
 185/60 R15  
 185/60 R15 RF  
 195/60 R15  
 205/60 R15  
 205/60 R16  
 185/55 R15  
 195/55 R15  
 205/55 R15  
 195/55 R16  
 205/55 R16  
 215/55 R16  
 225/55 ZR16  
 225/55 ZR17  
 195/50 R15  
 205/50 R15  
 205/50 ZR16  
 205/50 ZR17 RF  
 225/50 ZR17 RF  
 215/45 ZR17 RF  
 225/45 ZR17 RF  
 185/55 R14\*  
 195/50 R16\*



### Naturen ST 542

195/60 R15  
 205/55 R16  
 165/70 R14\*  
 175/70 R14\*  
 185/70 R14\*  
 195/70 R14\*  
 165/65 R14\*  
 165/65 R15\*  
 175/65 R14\*  
 175/65 R15\*  
 185/65 R14\*  
 185/65 R15\*  
 195/65 R15\*  
 205/65 R15\*  
 215/65 R15\*  
 185/60 R14\*  
 185/60 R15\*  
 205/60 R15\*  
 205/60 R16\*  
 215/60 R16\*  
 185/55 R14\*  
 185/55 R15\*  
 185/55 R16\*  
 195/55 R16\*  
 195/50 R15\*  
 195/50 R16\*



### Novaro ST 552

175/70 R14  
 175/65 R14  
 185/65 R14  
 185/65 R15  
 185/65 R15 RF  
 195/65 R15  
 195/65 R15 RF  
 185/60 R15  
 185/60 R15 RF  
 195/60 R15  
 205/55 R16



### Naturen ST 562

165/80 R13  
 175/70 R13  
 175/70 R14  
 175/70 R14 RF  
 175/65 R14  
 175/65 R14 RF  
 185/65 R14  
 185/65 R15 RF  
 185/65 R15  
 185/65 R15  
 195/65 R15  
 195/65 R15 RF  
 205/65 R15  
 205/65 R16  
 185/60 R13  
 185/60 R15 RF  
 185/60 R15  
 195/60 R15  
 205/60 R16  
 205/60 R16  
 195/55 R16  
 205/55 R16  
 205/55 R16  
 215/55 R16  
 215/50 R17  
 205/55 R16\*  
 215/55 R16\*  
 215/50 R17\*  
 225/45 R17 RF\*



## Ultrasport ST 730

185/60 R13  
 185/55 R14  
 185/55 R14  
 185/55 R15  
 195/55 R15  
 205/55 R15  
 195/55 R16  
 205/55 R16  
 205/55 ZR16 RF  
 215/55 ZR16 RF  
 225/55 R16  
 225/55 ZR17  
 195/50 R15  
 205/50 ZR15  
 195/50 R16  
 205/50 ZR16 RF  
 225/50 ZR16 RF  
 205/50 ZR17 RF  
 215/50 ZR17  
 225/50 ZR17 RF  
 195/45 R14  
 195/45 R15  
 205/45 R15  
 195/45 R16  
 205/45 ZR16 RE  
 205/45 ZR17 RF  
 215/45 ZR17 RF  
 225/45 ZR17 RF  
 245/45 ZR17 RF  
 225/45 ZR18 RF  
 245/45 ZR18 RF  
 205/40 ZR16 RF  
 215/40 ZR16 RF  
 225/40 ZR16  
 205/40 ZR17 RF  
 215/40 ZR17 RF  
 235/40 ZR17 RF  
 245/40 ZR17 RF  
 215/40 ZR18 RF  
 225/40 ZR18 RF  
 235/40 ZR18 RF  
 245/40 ZR18  
 225/40 ZR19  
 245/40 ZR19 RF  
 255/40 ZR19 RF  
 215/35 ZR18 RF  
 225/35 ZR18 RF  
 245/35 ZR18 RF  
 255/35 ZR18 RF  
 265/35 ZR18 RF  
 275/35 ZR18 RF  
 225/35 ZR19 RF  
 235/35 ZR19 RF  
 245/35 ZR19 RF  
 255/30 ZR19 RF  
 265/30 ZR19 RF  
 275/30 ZR19 RF  
 255/30 ZR19\*  
 265/30 ZR19\*  
 275/30 ZR19\*



## Ultrasport ST 740

205/55 R16



## Ultrasport ST 750

205/55 R16



## Ultrasport ST 760

215/60 R16 RF  
 225/60 R16  
 235/60 ZR16  
 185/55 R14  
 185/55 R15  
 185/55 R16 RF  
 195/55 R15  
 195/55 R16  
 195/55 R16 **RFT**  
 205/55 R16 **RFT**  
 205/55 ZR16 RF  
 205/55 ZR17  
 215/55 ZR16 RF  
 225/55 ZR16 RF  
 215/55 ZR17 RF  
 225/55 ZR17 RF  
 225/55 ZR17 **RFT**  
 235/55 ZR17 RF  
 195/50 R15  
 205/50 ZR15  
 195/50 R16  
 205/50 ZR16 RF  
 225/50 ZR16 RF  
 205/50 ZR17 RF  
 205/50 ZR17 **RFT**  
 215/50 ZR17 RF  
 225/50 ZR17 RF  
 225/50 ZR17 **RFT**  
 235/50 ZR18 RF  
 195/45 R16 RF  
 205/45 ZR16 RF  
 205/45 ZR17 RF  
 215/45 R16 RF  
 215/45 ZR17 RF  
 225/45 ZR17 RF  
 225/45 ZR17 **RFT**  
 235/45 ZR17 RF  
 245/45 ZR17 RF  
 215/45 ZR18 RF  
 225/45 ZR18 RF  
 225/45 ZR18 **RFT**  
 235/45 ZR18 RF  
 245/45 ZR18 RF  
 215/45 ZR19 RF  
 225/45 ZR19 RF  
 245/45 ZR19 **RFT**  
 205/40 ZR16 RF  
 215/40 ZR16 RF  
 205/40 ZR17 RF  
 215/40 ZR17 RF  
 235/40 ZR17 RF  
 245/40 ZR17 RF  
 215/40 ZR18 RF  
 225/40 ZR18 RF  
 235/40 ZR18 RF  
 245/40 ZR18 RF  
 295/25 R20\*



245/40 ZR18  
 245/40 ZR18 **RFT**  
 225/40 ZR19 RF  
 245/40 ZR19 RF  
 245/40 ZR19 **RFT**  
 255/40 ZR19 RF  
 215/35 ZR18 RF  
 245/35 ZR17 RF  
 255/35 ZR18 RF  
 275/35 ZR18 RF  
 235/35 ZR19 RF  
 255/35 ZR19 RF  
 255/35 ZR19 **RFT**  
 275/35 ZR19 RF  
 245/35 ZR20 RF  
 225/35 ZR18 RF  
 245/35 ZR18 RF  
 245/35 ZR19 RF  
 225/45 R19\*  
 225/40 R18 **RFT\***  
 225/40 R19 **RFT\***  
 275/40 R19\*  
 275/40 R19 **RFT\***  
 215/35 ZR18 RF\*  
 225/35 R20\*  
 245/35 R19 **RFT\***  
 255/35 R18 **RFT\***  
 255/35 ZR20 RF\*  
 265/35 R18\*  
 265/35 R19\*  
 275/35 R18 **RFT\***  
 275/35 R19 **RFT\***  
 275/35 R20\*  
 275/35 R20 **RFT\***  
 285/35 R18\*  
 285/35 R18 **RFT\***  
 285/35 R19\*  
 285/35 R19 **RFT\***  
 295/35 R18\*  
 225/30 R20\*  
 235/30 R20\*  
 245/30 R19\*  
 245/30 R20\*  
 255/30 R19\*  
 255/30 R20\*  
 265/30 R19\*  
 265/30 R20\*  
 275/30 R19\*  
 275/30 R20\*  
 285/30 R19\*  
 285/30 R19 **RFT\***  
 285/30 R20\*  
 285/30 R20 **RFT\***  
 295/30 R19\*  
 305/30 R19\*  
 305/30 R20\*  
 285/25 R20\*  
 295/25 R20\*

RF: REINFORCED  
 RFT: RUN FLAT  
 \* UNDER DEVELOPMENT

## TIRES BY SIZE

### Icegripper W810

155/80 R13  
165/80 R13  
175/80 R14  
145/70 R13  
155/70 R13  
165/70 R13  
165/70 R13 RF  
175/70 R13  
185/70 R13  
165/70 R14  
165/70 R14 RF  
175/70 R14  
175/70 R14 RF  
185/70 R14  
195/70 R14  
195/70 R15 RF  
155/65 R13  
165/65 R13  
175/65 R13  
155/65 R14  
165/65 R14  
175/65 R14  
175/65 R14 RF  
185/65 R14  
175/65 R15  
165/60 R14



### Icegripper W850

185/65 R15  
185/65 R15 RF  
195/65 R15  
195/65 R15 RF  
205/65 R15  
215/65 R15  
205/65 R16  
215/65 R16  
215/65 R16 RF  
185/60 R14  
185/60 R15  
195/60 R14  
195/60 R15  
205/60 R15  
205/60 R16  
215/60 R16  
225/60 R16  
235/60 R16  
185/55 R14  
185/55 R15  
195/55 R15  
195/55 R16  
205/55 R15  
205/55 R15 RF  
205/55 R16  
205/55 R16 RFT  
215/55 R16  
225/55 R16  
215/55 R17 RF  
225/55 R17  
225/55 R17 RF  
235/55 R17 RF  
195/50 R15  
205/50 R15  
195/50 R16  
205/50 R16  
205/50 R16 RF  
225/50 R16 RF  
205/50 R17 RF  
215/50 R17  
225/50 R17 RF  
195/45 R16 RF  
205/45 R16 RF  
205/45 R17 RF  
215/45 R17 RF  
225/45 R17 RF  
235/45 R17 RF  
245/45 R17 RF  
225/45 R18 RF  
235/45 R18 RF  
245/45 R18 RF  
225/40 R18 RF  
235/40 R18 RF  
245/40 R18 RF



### Incurro ST 430 A/S

235/75 R15  
205/70 R15  
215/70 R15  
215/70 R16  
225/70 R16 RF  
235/70 R16  
245/70 R16  
265/70 R16  
255/70 R16  
215/65 R16  
215/65 R16 RF  
215/65 R17  
225/65 R17  
235/65 R17 RF  
245/65 R17 RF  
255/65 R16  
255/65 R17  
265/65 R17  
215/60 R16  
225/60 R17 RF  
235/60 R16



### Incurro ST 440 A/T

205/80 R16 RF  
235/75 R15  
255/70 R15  
265/70 R15  
265/70 R15 RF  
245/70 R16 RF  
215/65 R16  
235/65 R17 RF



### Incurro ST 450 H/T

235/65 R17 RF  
215/60 R17  
225/60 R18  
235/60 R17  
235/60 R18 RF  
245/60 R18  
255/60 R17  
255/60 R18 RF  
265/60 R18  
265/60 R18  
215/55 R18  
225/55 R19  
225/55 R18  
225/55 R17  
235/55 R17 RF  
235/55 R18  
235/55 R19 RF  
245/55 R19  
255/55 R18 RF  
255/55 R19 RF  
275/55 R19  
235/50 R18 RF  
255/50 R19 RF  
255/50 ZR19 RF **RFT**  
265/50 ZR19 RF  
275/45 ZR19 RF  
275/45 ZR20 RF  
275/40 ZR20 RF  
285/45 R19 RF  
315/35 ZR20 RF\*  
315/35 ZR20 RF **RFT\***



## Incurro W 870

205/80 R16 RF  
 235/75 R15 RF  
 205/70 R15  
 215/70 R15  
 215/70 R16 RF  
 225/70 R16 RF  
 235/70 R16  
 245/70 R16 RF  
 255/70 R16  
 265/70 R16  
 215/65 R17  
 225/65 R17 RF  
 235/65 R17 RF  
 245/65 R17 RF  
 255/65 R17 RF  
 265/65 R17 RF  
 215/60 R17 RF  
 225/60 R17 RF  
 235/60 R17 RF  
 255/60 R17 RF  
 225/60 R18 RF  
 235/60 R18 RF  
 245/60 R18  
 265/60 R18 RF  
 255/60 R18 RF  
 235/55 R17 RF  
 215/55 R18  
 225/55 R18 RF  
 235/55 R18 RF  
 255/55 R18 RF  
 225/55 R19  
 235/55 R19 RF  
 245/55 R19  
 255/55 R19 RF  
 275/55 R19  
 235/50 R18 RF  
 235/50 R19 RF  
 255/50 R19 RF  
 255/50 R19 RF RFT  
 265/50 R20 RF  
 225/45 R19 RF  
 285/45 R19 RF  
 275/40 R20 RF  
 275/45 R20\*  
 315/35 R20\*



## Provan ST 850

185 R14 C  
 195 R14 C  
 195 R15 C  
 195/75 R16 C  
 165/70 R14 C  
 225/70 R15 C



## Provan ST 850 Plus

5.00R12 C  
 155 R12 C  
 155 R13 C  
 185 R14 C  
 195 R14 C  
 185 R15 C  
 175/75 R16 C  
 185/75 R16 C  
 195/75 R16 C  
 205/75 R16 C  
 215/75 R16 C  
 225/75 R16 C  
 165/70 R14 C  
 195/70 R15 C  
 205/70 R15 C  
 215/70 R15 C  
 225/70 R15 C  
 205/65 R15 C  
 205/65 R16 C  
 215/65 R16 C  
 225/65 R16 C  
 235/65 R16 C



## Provan ST 860

205/75 R16 C  
 215/75 R16 C  
 215/75 R16 C  
 225/70 R15 C  
 205/65 R16 C  
 215/65 R15 C  
 215/65 R16 C  
 235/65 R16 C  
 285/65 R16 C  
 195/60 R16 C



## Protterra ST 900

155 R12 C  
 155 R13 C  
 185 R14 C  
 195 R14 C  
 185/75 R16 C  
 195/75 R16 C  
 205/75 R16 C  
 215/75 R16 C  
 225/75 R16 C  
 195/70 R15 C  
 205/70 R15 C  
 215/70 R15 C  
 225/70 R15 C  
 205/65 R15 C  
 205/65 R16 C  
 215/65 R16 C  
 225/65 R16 C  
 235/65 R16 C



## Prowin ST 950

155 R12 C  
 155 R13 C  
 185 R14 C  
 195 R14 C  
 175/75 R16 C  
 185/75 R16 C  
 195/75 R16 C  
 205/75 R16 C  
 215/75 R16 C  
 225/75 R16 C  
 195/70 R15 C  
 205/70 R15 C  
 215/70 R15 C  
 225/70 R15 C  
 205/65 R15 C  
 205/65 R16 C  
 215/65 R16 C  
 225/65 R16 C  
 235/65 R16 C  
 195/60 R16 C



## Prowin ST 960

185 R14 C  
 195 R14 C  
 185/75 R16 C  
 195/75 R16 C  
 205/75 R16 C  
 215/75 R16 C  
 225/75 R16 C  
 205/70 R15 C  
 225/70 R15 C  
 195/65 R16 C  
 205/65 R16 C  
 215/65 R16 C  
 225/65 R16 C  
 235/65 R16 C  
 195/60 R16 C



RF: REINFORCED  
 RFT: RUN FLAT  
 \* UNDER DEVELOPMENT



## SIDEWALL MARKINGS

There are certain markings on the sidewall of tires. You shall find these remarkable notices and properties below;

### **DOT Symbol:**

Proves that tyre complies with DOT regulations.

### **European Commission of Economics Confirmation :**

It is the legitimate proof that tires comply with all ECE directives and is represented by a common confirmation number.

### **Max. Load and Pressure Markings:**

It is a necessary marking on sidewalls of tires which complies with DOT directives. It consists of necessary information about max. load and pressure of tyres.

### **“European Commission of Economics” Tire Verification**

#### **Symbol:**

This symbol proves that the tyre complies with all necessary standards disclaimed by European Commission of Economics.

### **Construction Info:**

It represents the ply ratings and type of material used in sidewall and base in accordance with DOT regulation.


### **UTQG Quality Indicator:**

- **Wear Life Indicator:** a tire when tested under standard conditions, wear life as 100 according to the test. Tire life indicates proportionate. Tire life usage patterns, climate and road conditions may change significantly depending on the service properties. More than 100 very good, 100 'is good, 100' below the weak reputation.
- **Traction Class Indicator:** Under controlled conditions demonstrated the ability to stand on the rubber surface is wet. Traction grades, from highest to lowest, are AA, A, B and C.
- **Heat Resistance Indicator :** Tire's resistance to heat and shows the ability to throw heat. Traction grades, from highest to lowest, are AA, A, B and C.

### **Speed class and load index :**

European ETRTO standards maximum load and maximum load the tire can be based on the maximum rate based on the mark is indicating.

- |                                   |                                   |
|-----------------------------------|-----------------------------------|
| 1 - Brand Logo                    | 13 - Speed Index                  |
| 2 - Construction Information      | 14 - Safety Warnings              |
| 3 - Manufacturing Country         | 15 - Outside                      |
| 4 - Max. Load and Pressure Rating | 16 - E Mark Official Number       |
| 5 - Mold No                       | 17 - Max. Load Index              |
| 6 - Construction Type             | 18 - Tire Size                    |
| 7 - DOT Mark                      | 19 - Pattern Name                 |
| 8 - Factory Code                  | 20 - Temperature Resistance Index |
| 9 - Tubeless                      | 21 - Tire Road Grip Index         |
| 10 - Product Code                 | 22 - Tire Wear Index Resistance   |
| 11 - Date of Manufacture          | 23 - UTQG Quality Indicator :     |
| 12 - E Mark                       |                                   |

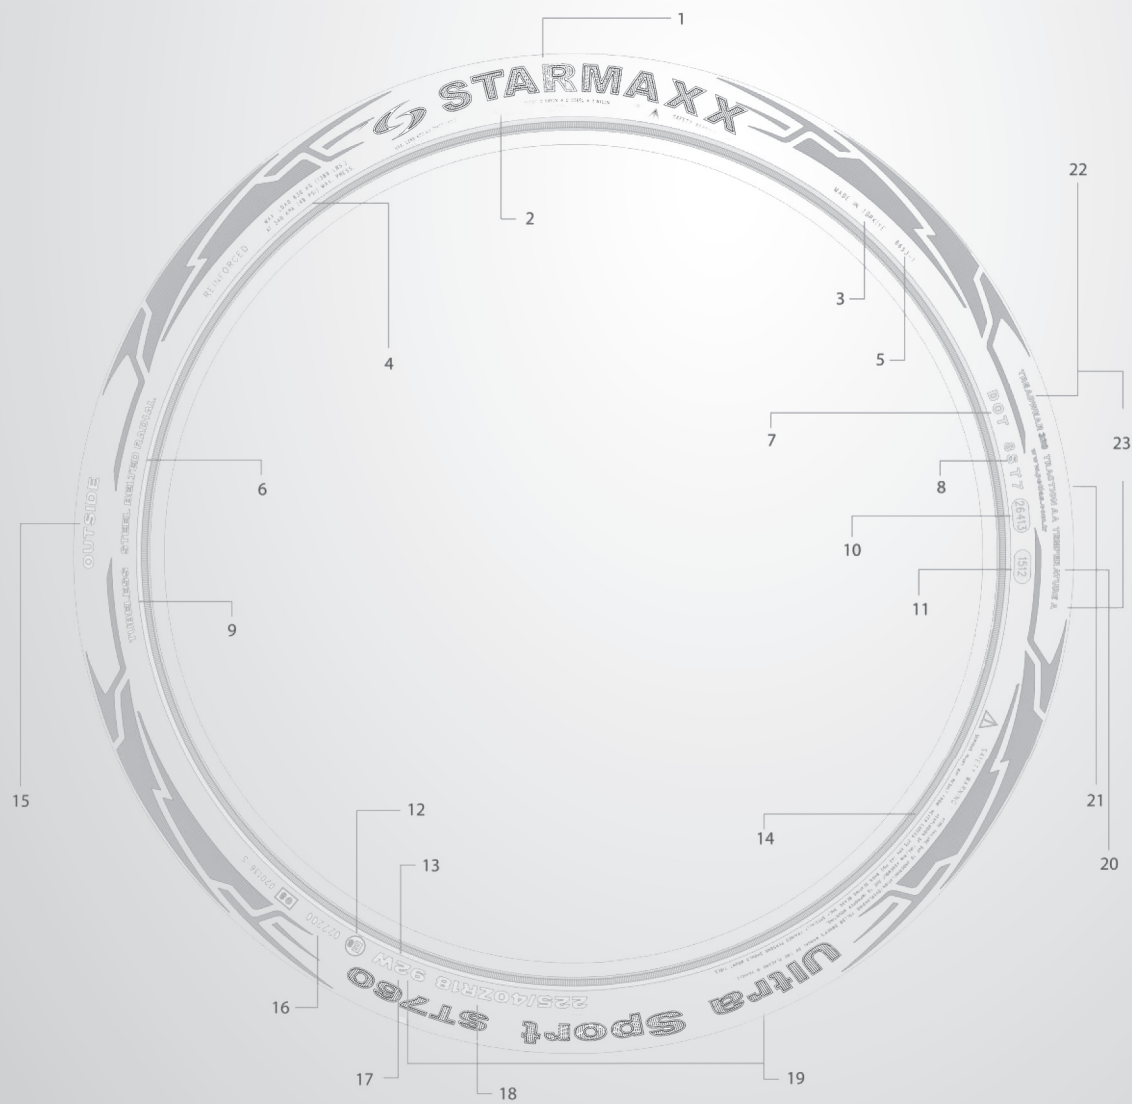


There is a hero behind you!  
Don't be afraid to travel on  
challenging roads.



**starmaxx**  
HIGH PERFORMANCE TIRES

[www.starmaxx.com](http://www.starmaxx.com)

## RADIAL TIRE CONSTRUCTION

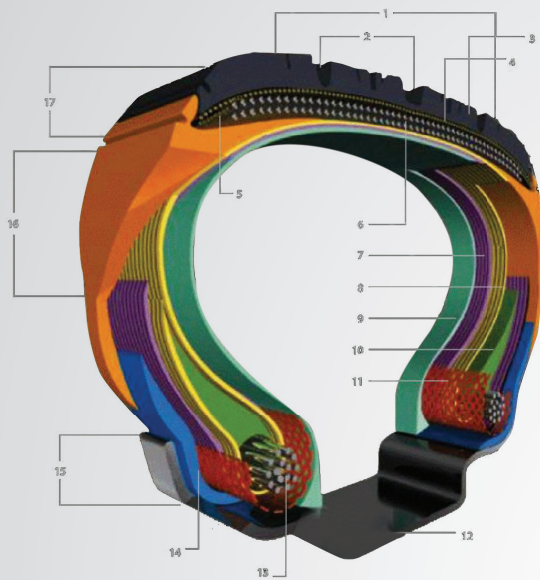

1. Tread
2. Water Channeling
3. Blocks
4. Nylon Impact Layer
5. Reinforcement Layer
6. Steel Cords
7. First Carcass Layer
8. Second Carcass Layer
9. Coating
10. Bead Filling
11. Bead Reinforcement fabric
12. Wheel
13. Bead Wire
14. Flap
15. Bead
16. Sidewall
17. Shoulder


## IMPORTANT DEFINITIONS RELATED TO THE TIRE

The tire is generally defined with such parameters as the maximum cross-section width corresponding to the standard inflation pressure in the measurement rim, nominal diameter of the rim to be attached, speed index, load capacity index and the cross-section ratio.

### EXAMPLE :

Tire size 225 / 40ZR18 92W

- Cross - section width 225 mm (Max. distance between side-walls of an inflated tire)
- Series - the cross-section height to crosssection width (%55)
- Radial body structure (ZR)
- Symbol of rim diameter (inch) (18)
- Load index (92)
- Speed symbol (W)
- Serial no ; each producer's coding consisting of the production data
- Abrasion indicator (TWI) OR
- Usable in a tubeless way or with the tubetype usage
- Northern America Department of Transportation compliance symbol (DOT)
- European Community Compliance symbol and registry no (E)
- Arrow for direction of rotation, inside/outside

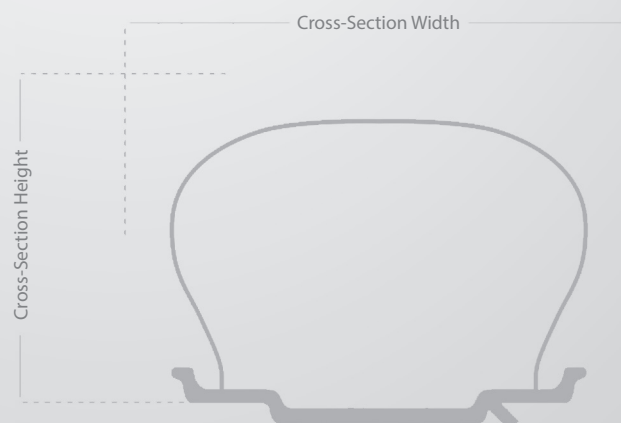



## LOAD INDEX TABLE

### Load Index Table

The load index is a symbol which shows the maximum load capacity of the vehicle per tyre.

A	B	A	B	A	B	A	B	A	B	A	B
60	250	96	710	132	2000	168	5600	204	16000	240	45000
61	257	97	730	133	2060	169	5800	205	16500	241	46250
62	265	98	750	134	2120	170	6000	206	17000	242	47500
63	272	99	775	135	2180	171	6150	207	17500	243	48750
64	280	100	800	136	2240	172	6300	208	18000	244	50000
65	290	101	825	137	2300	173	6500	209	18500	245	51500
66	300	102	850	138	2360	174	6700	210	19000	246	53000
67	307	103	875	139	2430	175	6900	211	19500	247	54500
68	315	104	900	140	2500	176	7100	212	20000	248	56000
69	325	105	925	141	2575	177	7300	213	20600	249	58000
70	335	106	950	142	2650	178	7500	214	21200	250	60000
71	345	107	975	143	2725	179	7750	215	21800	251	61500
72	355	108	1000	144	2800	180	8000	216	22400	252	63000
73	365	109	1030	145	2900	181	8250	217	23000	253	65000
74	375	110	1060	146	3000	182	8500	218	23600	254	67000
75	387	111	1090	147	3075	183	8750	219	24300	255	69000
76	400	112	1120	148	3150	184	9000	220	25000	256	71000
77	412	113	1150	149	3250	185	9250	221	25750	257	73000
78	425	114	1180	150	3350	186	9500	222	26500	258	75000
79	437	115	1215	151	3450	187	9750	223	27250	259	77500
80	450	116	1250	152	3550	188	10000	224	28000	260	80000
81	462	117	1285	153	3650	189	10300	225	29000	261	82500
82	475	118	1320	154	3750	190	10600	226	30000	262	85000
83	487	119	1360	155	3875	191	10900	227	30750	263	87500
84	500	120	1400	156	4000	192	11200	228	31500	264	90000
85	515	121	1450	157	4125	193	11500	229	32500	265	92500
86	530	122	1500	158	4250	194	11800	230	33500	266	95000
87	545	123	1550	159	4375	195	12150	231	34500	267	97500
88	560	124	1600	160	4500	196	12500	232	35500	268	100000
89	580	125	1650	161	4625	197	12850	233	36500	269	103000
90	600	126	1700	162	4750	198	13200	234	37500	270	106000
91	615	127	1750	163	4875	199	13600	235	38750	271	109000
92	630	128	1800	164	5000	200	14000	236	40000	272	112000
93	650	129	1850	165	5150	201	14500	237	41250	273	115000
94	670	130	1900	166	5300	202	15000	238	42500	274	118000
95	690	131	1950	167	5450	203	15500	239	43750	275	121500

- (A) Load Index  
 (B) The weight a tyre can carry (kg)





starmaxx

ST 330



SUMMER



ST 532



SUMMER



ST 542



SUMMER



ST 552



SUMMER WINTER



ST 562



SUMMER



ST 730



SUMMER





PASSENGER CAR TIRES

ST 740



SUMMER



ST 750



SUMMER



ST 760



SUMMER



W 810



WINTER



W 850



WINTER





# ST 330 Tolero

General purpose performance tire with speed index for passenger cars. It provides perfect control and driving comfort with its optimized profile and structure. It also provides a silent drive with its computerized esthetic design.



## PERFORMANCE HANDLING ANY ROAD

### ■ PATTERN PROPERTIES



- Circumferential rib on the tread center improves handling, and braking performance



- Stiff shoulder blocks enable exceptional cornering performance at high speeds, and provide resistance against irregular wear.



- Computer simulated block array minimizes road / pattern noise, and enhances driving comfort.



- Depending on the size of the tire, three or four different grooves provide excellent water drainage, and reduce the risk of aquaplaning significantly.





## ■ ALL SIZES

## ST 330 Tolero

155/80 R12	77T	145/70 R13	71T	185/70 R14	88T ●●	185/65 R14	86T ●●
155/80 R13	79T	155/70 R13	75T	195/70 R14	91T ●●	195/65 R14	89H ●●
165/80 R13	83T	165/70 R13	79T	195/70 R15 RF	97T ●●	175/65 R15	84T
165/80 R13 RF	87R	165/70 R13 RF	83T	155/65 R13	73T	185/65 R15	88T ●●
175/80 R14	88T	175/70 R13	82T	165/65 R13	77T	195/65 R15 RF	95T ●●
165/80 R15	87T	185/70 R13	86T ●●	175/65 R13	80T	195/65 R15	91T ●●
145/70 R12	69T	165/70 R14	81T	155/65 R14	75T	165/60 R14	75T
155/70 R12	73T	165/70 R14 RF	85R	165/65 R14	79T		
165/70 R12	77T	175/70 R14	84T	175/65 R14	82T		
175/70 R12	80T	175/70 R14 RF	88T	175/65 R14 RF	86T		

RF: REINFORCED



## ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Patial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.

High Tech Construction


Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 532 Novaro

ST 532 is an advanced hi-tech performance tire, designed to optimum grip and comfort. It provides ultimate grip on wet and dry surfaces thanks to its special tread design. You will feel the comfort and safety with its hi-tech tire profile and structure. You will grip the road safely with ST 532, presented in a wide scale of product portfolio.



## GRIP THE ROAD SAFELY

### ■ PATTERN PROPERTIES



- Circumferential plain block attached to the shoulder provides excellent handling and braking performance on dry and wet roads.



- Asymmetric tread pattern enables exceptional performance on dry and wet roads.



- Stiff shoulder blocks exceptional cornering performance at high speeds, and provide resistance against irregular wear.



- Computer simulated block array, inner and outer lateral channels minimize road / pattern noise, and enhance driving comfort.



- Four different grooves provide excellent water drainage, and reduce the risk of aquaplaning significantly.





## ■ ALL SIZES

## ST 532 Novaro

175/70 R13	82H	195/65 R15 RF	95H	185/60 R15 RF	88H	195/55 R16	87V	205/50 ZR17 RF	93W
175/70 R14	84H	195/65 R15	91V	195/60 R15	88H	205/55 R16	91H	225/50 ZR17 RF	98W
175/70 R14 RF	88H	205/65 R15	94H	195/60 R15	88V	205/55 R16	91V	215/45 ZR17 RF	91W
185/70 R14	88H	205/65 R15	94V	205/60 R15	91H	215/55 R16	93H	225/45 ZR17 RF	94W
175/65 R14	82H	215/65 R15	96V	205/60 R15	91V	215/55 R16	93V	185/55 R14*	
175/65 R14 RF	86T	205/65 R16	95H	205/60 R16	92H	225/55 ZR16	95W	195/50 R16*	
185/65 R14	86H	215/65 R16	98H	205/60 R16	92V	225/55 ZR17	97W		
175/65 R15	84H	215/65 R16	98V	185/55 R15	82V	195/50 R15	82V		
185/65 R15	88H	185/60 R14	82H	195/55 R15	85V	205/50 R15	86V		
185/65 R15 RF	92H	195/60 R14	86H	205/55 R15	88V	205/50 R16	87W		
195/65 R15	91H	185/60 R15	84H						

RF: REINFORCED  
\*UNDER DEVELOPMENT



## ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption

High Tech Construction

Jointless "0" degree spiral nylon cover and wide steel belts

High driving safety, comfort and durability.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 542 Naturen

Naturen ST 542 is a Eco – Friendly tire for passenger cars. Its special compound ensure low rolling resistance, long life and good breaking performance. It contributes to fuel saving and the enviroment while securing safety.



## ECOLOGICALLY FRIENDLY FUEL SAVING PERFORMANCE

### ■ PATTERN PROPERTIES



- High performance on both dry and wet surfaces with asymmetrical pattern
- Optimized foot print, sipe / groove and sipe density to help for achieving good rolling resistance while securing safety.
- Computer designed block array. Minimised road / pattern noise, high driving confort
- Fast and effective water discharge with three circular canals





## ■ ALL SIZES

195/60 R15 88H	175/65 R15*	205/60 R16*
205/55 R16 91H	185/65 R14*	215/60 R16*
165/70 R14*	185/65 R15*	185/55 R14*
175/70 R14*	195/65 R15*	185/55 R15*
185/70 R14*	205/65 R15*	185/55 R16*
195/70 R14*	215/65 R15*	195/55 R15*
165/65 R14*	185/60 R14*	195/55 R16*
165/65 R15*	185/60 R15*	195/50 R15*
175/65 R14*	205/60 R15*	195/50 R16*

## ST 542 Naturen

\*UNDER DEVELOPMENT



## ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improve uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 552 Novaro

All season tire for passenger cars. It provides perfect control, driving comfort and sufficient traction with its optimized profile, structure and sipe density for all weather conditions in mild climate.



## EXCEPTIONAL ALL SEASON PERFORMANCE.

### ■ PATTERN PROPERTIES



- Circumferential rib on the tread center improves handling, and braking performance



- Better grip and traction on wet surface with optimized sipe density.



- Computer simulated block array minimizes road /pattern noise, and enhances driving comfort.



- Four circumferential grooves provides excellent water drainage and reduce the risk of aquaplaning significantly





## ■ ALL SIZES

175/70 R14	84H	195/65 R15 RF	95H
175/65 R14	82H	185/60 R15	84H
185/65 R14	86H	185/60 R15 RF	88H
185/65 R15	88H	195/60 R15	88H
185/65 R15 RF	92H	205/55 R16	91H
195/65 R15	91H		

RF: REINFORCED

ST 552 Novaro



## ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Partial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improve uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.





# ST 562 Naturen

Naturen ST 562 is a passenger car tire with its special compound ensure long life, driving comfort and good breaking performance.



## ENJOY THE ROAD WITH HIGH CONFORT

### ■ PATTERN PROPERTIES



- Fast and effective water discharge with three circular canals.



- High performance on both dry and wet surfaces with asymmetrical pattern



- Better grip and traction on wet surface with four block array.



- Computer designed block array.  
Minimised road / pattern noise, high driving confort





### ■ ALL SIZES

165/80 R13	83T	195/65 R15	91H	195/55 R16	87H
175/70 R13	82T	195/65 R15 RF	95T	205/55 R16	91H
175/70 R14	84T	205/65 R15	94H	205/55 R16	91V
175/70 R14 RF	88T	205/65 R16	94V	215/55 R16	93V
175/65 R14	82T	185/60 R13	80H	215/50 R17	91V
175/65 R14 RF	86T	185/60R 15 RF	88T	205/55 R16*	
185/65 R14	86T	185/60 R15	84H	215/55 R16*	
185/65 R15 RF	92T	195/60 R15	88H	215/50 R17*	
185/65 R15	88T	205/60 R16	92H	215/55 R16*	
185/65 R15	88H	205/60 R16	92V	215/50 R17*	
195/65 R15	91T				

RF: REINFORCED  
\*UNDER DEVELOPMENT

### ST 562 Naturen



### ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improve uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 730 Ultrasport

Ultra High Performance passenger tires for users, adopted performance as life style. It provides ultimate bend-turning option and high anti-wear resistance with computer designed pattern and tire profile. One direction pattern represents an esthetic appearance and provides efficient water discharge.



## URNS POWER INTO PERFORMANCE

### ■ PATTERN PROPERTIES



- Esthetical pattern design



- Strong shoulder blocks enable exceptional cornering performance at high speeds, and provide resistance against irregular wear



- V-shaped grooves from crown center towards the shoulder provide effective water drainage, resulting in better wet-grip





## ALL SIZES

185/60 R13	80H	195/50 R15	82V	215/45 ZR17 RF	91W	235/40 ZR18 RF	95W	255/30 ZR19 RF	91W
185/60 R13	80V	205/50 ZR15	86W	225/45 ZR17 RF	94W	245/40 ZR18	93W	265/30 ZR19 RF	93W
185/55 R14	80H	195/50 R16	84V	245/45 ZR17 RF	99W	225/40 ZR19	89W	275/30 ZR19 RF	96W
185/55 R14	80V	205/50 ZR16 RF	91W	225/45 ZR18 RF	95W	245/40 ZR19 RF	98W	255/40 ZR19*	
185/55 R15	82H	225/50 ZR16 RF	96W	245/45 ZR18 RF	100W	255/40 ZR19 RF	100W	215/35 ZR18*	
185/55 R15	82V	205/50 ZR17 RF	93W	205/40 ZR16 RF	83W	215/35 ZR18 RF	84W	265/35 ZR18*	
195/55 R15	85V	215/50 ZR17	91W	215/40 ZR16 RF	86W	225/35 ZR18 RF	87W	275/35 ZR18*	
205/55 R15	88V	225/50 ZR17 RF	98W	225/40 ZR16	85W	245/35 ZR18 RF	92W	255/30 ZR19*	
195/55 R16	87V	195/45 R14	77V	205/40 ZR17 RF	84W	255/35 ZR18 RF	94W	265/30 ZR19*	
205/55 R16	91V	195/45 R15	78V	215/40 ZR17 RF	87W	265/35 ZR18 RF	97W	275/30 ZR19*	
205/55 ZR16 RF	94W	205/45 R15	81V	235/40 ZR17 RF	94W	275/35 ZR18 RF	99W		
215/55 ZR16 RF	97W	195/45 R16	80V	245/40 ZR17 RF	95W	225/35 ZR19 RF	88W		
225/55 R16	95V	205/45 ZR16 RF	87W	215/40 ZR18 RF	89W	235/35 ZR19 RF	91W		
225/55 ZR17	97W	205/45 ZR17 RF	88W	225/40 ZR18 RF	92W	245/35 ZR19 RF	93W		

## ST 730 Ultrasport

RF: REINFORCED  
\*UNDER DEVELOPMENT



## TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.

High Tech Undertread Construction


Jointless "0" degree spiral nylon cover and wide steel belts

It improve uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 740 Ultrasport

Its hi-tech structure and profile provides ultimate performance and grip during high speed drive. Special pattern design decreases floatation and noise ; and increases balance. ST 740 offers optimum performance on wet and dry road conditions. Tyre construction and profile enable very good cornering performance at high speeds. Computer simulated pattern, and special tread compound reduce the risk of aquaplaning, minimize road / pattern noise, and improve balance.



## MAXIMUM PERFORMANCE WITH HIGH ENGINEERING TECHNOLOGY

### ■ PATTERN PROPERTIES



- Fast and effective water discharge with three circular canals, one of which is wide



- High traction and brake capacity with special pattern



- High performance on both dry and wet surfaces with asymmetrical pattern



- Reinforced and wide shoulder block increases the surface amount, contacting the surface and makes dry grip performance better. High curve turning property / maneuverability provides asymmetrical wear resistance.



- Outer side, designed more intense, provides grip dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



- Computer designed block array. Minimised road / pattern noise, high driving comfort



## ■ SIZE

## ST 740 Ultrasport

205/55 R16 91V



## ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

High driving safety, comfort and durability.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 750 Ultrasport

Special pattern design reflects the esthetics and modernism. Silent and comfortable drive on wet and dry surfaces with hi-tech structure ST 750, developed for mid-class cars, provides ultimate comfort and performance. Computer simulated pattern, and special tread compound enable optimum performance on wet and dry road conditions. ST 750 that is developed for mid-segment cars offers a quiet and comfortable riding.



## ENJOY THE ROAD WITH PERFECT DYNAMIC STRUCTURE

### ■ PATTERN PROPERTIES



- Center block contacts the surface and provides a stable and a balanced drive



- High performance on both dry and wet surfaces with asymmetrical pattern



- Reinforced and wide shoulder block increases the surface amount, contacting the surface and makes dry grip performance better. High curve turning property / maneuverability provides asymmetrical wear resistance.



- Outer side, designed more intense, provides grips dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



- Computer designed block array. Minimised road / pattern noise, high driving comfort



- Fast and effective water discharge with three circular canals



## ALL SIZES

205/55 R16      91H  
205/55 R16      91V

## ST 750 Ultrasport



## TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

High driving safety, comfort and durability.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.





# ST 760 Ultrasport

ST 760, designed for speed addicts, presents high speed, safety and driving pleasure. Perfect performance and handling control for speed addicts with special profile. Maximum grip in bends on wet and dry surfaces. Wide area of use from sport cars to luxury vehicles with hi-tech structure and esthetic appearance. ST 760 is a high-performance tire that is designed for providing high speed, comfort, and security all at the same time.



FOR THE ONES, HAVING DESIRE FOR  
SPEED PERFORMANCE AND COMFORT

## ■ PATTERN PROPERTIES



- Center block contacts the surface and provides a stable and a balanced drive



- High performance on both dry and wet surfaces with asymmetrical pattern



- Reinforced and wide shoulder block increases the surface amount, contacting the surface and makes dry grip performance better. High curve turning property / maneuverability provides asymmetrical wear resistance.



- Outer side, designed more intense, provides grips dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



- Computer designed block array.  
Minimised road / pattern noise, high driving comfort



- Fast and effective water discharge with three circular canals



Specially designed tread profile enables exceptional high – speed capabilities , superb handling and cornering response on dry and wet road conditions. Modern tread design and special tread compound provide fuel economy as well as durability. ST 760 is developed for a wide range, from sport cars to luxury cars.

\*SEE NEXT PAGE FOR ALL SIZES



## TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.

High Tech Undertread Construction


Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 760 ULTRASPORT



 **starmaxx**  
HIGH PERFORMANCE TIRES



## ■ ALL SIZES

215/60 R16 RF  
225/60 R16  
235/60 ZR16  
185/55 R14  
185/55 R15  
185/55 R16 RF  
195/55 R15  
195/55 R16  
195/55 R16 RFT  
205/55 R16 RFT  
205/55 ZR16 RF  
205/55 ZR17  
215/55 ZR16 RF  
225/55 ZR16 RF  
215/55 ZR17 RF  
225/55 ZR17 RF  
225/55 ZR17 RFT  
235/55 ZR17 RF  
195/50 R15  
205/50 ZR15  
195/50 R16  
205/50 ZR16 RF  
225/50 ZR16 RF  
205/50 ZR17 RF  
205/50 ZR17 RFT  
215/50 ZR17 RF  
225/50 ZR17 RF  
225/50 ZR17 RFT  
235/50 ZR18 RF  
195/45 R16 RF  
205/45 ZR16 RF  
205/45 ZR17 RF  
215/45 R16 RF  
215/45 ZR17 RF  
225/45 ZR17 RF  
225/45 ZR17 RFT  
235/45 ZR17 RF  
245/45 ZR17 RF  
215/45 ZR18 RF  
225/45 ZR18 RF  
225/45 ZR18 RFT  
235/45 ZR18 RF  
245/45 ZR18 RF  
245/45 ZR18 RFT  
255/45 ZR18 RF ●●  
225/45 ZR19 RF  
245/45 ZR19 RF  
245/45 ZR19 RFT  
205/40 ZR16 RF  
215/40 ZR16 RF  
205/40 ZR17 RF

215/40 ZR17 RF  
235/40 ZR17 RF  
245/40 ZR17 RF  
215/40 ZR18 RF  
225/40 ZR18 RF  
235/40 ZR18 RF  
245/40 ZR18  
245/40 ZR18 RFT  
225/40 ZR19 RF  
245/40 ZR19 RF  
245/40 ZR19 RFT  
255/40 ZR19 RF ●●  
215/35 ZR18 RF  
245/35 ZR17 RF  
255/35 ZR18 RF ●●  
275/35 ZR18 RF ●●  
235/35 ZR19 RF  
255/35 ZR19 RF ●●  
255/35 ZR19 RFT ●●  
275/35 ZR19 RF  
245/35 ZR20 RF ●●  
225/35 ZR18 RF  
245/35 ZR18 RF  
245/35 ZR19 RF  
225/45 R19\*  
225/40 R18 RFT\*  
225/40 R19 RFT\*  
275/40 R19\*  
275/40 R19 RFT\*  
215/35 ZR18 RF\*  
225/35 R20\*  
245/35 R19 RFT\*  
255/35 R18 RFT\*  
255/35 ZR20 RF\*  
265/35 R18\*  
265/35 R19\*  
275/35 R18 RFT\*  
275/35 R19 RFT\*  
275/35 R20\*  
275/35 R20 RFT\*  
285/35 R18\*  
285/35 R18 RFT\*  
285/35 R19\*  
285/35 R19 RFT\*  
295/35 R18\*  
225/30 R20\*  
235/30 R20\*  
245/30 R19\*  
245/30 R20\*  
255/30 R19\*  
255/30 R20\*

## ST 760 Ultrasport

265/30 R19\*  
265/30 R20\*  
275/30 R19\*  
275/30 R20\*  
285/30 R19\*  
285/30 R19 RFT\*  
285/30 R20\*  
285/30 R20 RFT\*  
295/30 R19\*  
305/30 R19\*  
305/30 R20\*  
285/25 R20\*  
295/25 R20\*

RF: REINFORCED  
 RFT: RUN FLAT  
 \*UNDER DEVELOPMENT

# W 810 Icegripper

It provides high brake safety and grip on snowy surfaces with wide side channels and multi – lamella blocks, optimized towards rolling direction. Minimum road / pattern noise and high driving comfort with computer designed block array. High performance on snowy and icy surfaces with Z- shaped lamellas.



## GRIP THE ROAD SAFETY IN WINTER CONDITIONS

Enables fast and effective water discharge with wide circular channels. Its complete silicate tread mixture, improved with FST, helps to preserve elasticity in low temperatures and increases the grip capacity on snowy / icy surfaces ; provides stability and comfortable drive during high speed voyages.

### ■ PATTERN PROPERTIES



- Wide lateral grooves and circumferential blocks improve braking performance on snow and ice



- Z- shaped multi sipes improve handling performance on snow and ice



- Computer designed block array. Minimum road / pattern noise and high driving comfort



- Circumferential 3 wide grooves provide excellent water drainage and improve aquaplaning significantly.



WINTER



## ■ ALL SIZES

155/80 R13	79T	165/70 R14 RF	85R	165/65 R14	79T
165/80 R13	83T	175/70 R14	84T	175/65 R14	82T
175/80 R14	88T	175/70 R14 RF	88T	175/65 R14 RF	86T
145/70 R13	71T	185/70 R14	88T ●●	185/65 R14	86T ●●
155/70 R13	75T	195/70 R14	91T ●●	175/65 R15	84T
165/70 R13	79T	195/70 R15 RF	97T ●●	165/60 R14	75T
165/70 R13 RF	83T	155/65 R13	73T		
175/70 R13	82T	165/65 R13	77T		
185/70 R13	86T ●●	175/65 R13	80T		
165/70 R14	81T	155/65 R14	75T		

RF: REINFORCED

## W 810 Icegripper



## ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Strengthens the link between tire and rim for a more precise driving experience.



# W 850 Icegripper

It provides high brake safety and grip on snowy surfaces with wide side channels and optimized multi-lamella blocks. It provides high maneuverability and bend-turning capacity with outer block type base structure on asymmetric pattern; and low noise and high driving comfort with v-shaped pattern on the inside.



## ULTIMATE PERFORMANCE ON SNOWY AND ICY SURFACES

Its complete silicate tread mixture, improved with FTS, helps to preserve elasticity on snowy / icy surfaces; provides stability and comfortable drive during high speed voyages with outer and side channels.

### ■ PATTERN PROPERTIES



- Wide lateral grooves and circumferential blocks improve braking performance on snow and ice



- Z-shaped multi sipes improve handling performance on snow and ice



- V-shaped tread design on the inner side minimises noise and improves comfort



- High maneuverability and bend-turning capacity with outer block type base structure on the pattern



## ALL SIZES

185/65 R15	88H	185/60 R15	84H	195/55 R15	85H	205/50 R15	86H	225/45 R17 RF	94V
185/65 R15 RF	92H	195/60 R15	88H	195/55 R16	87H	195/50 R16	84H	235/45 R17 RF	97V
195/65 R15	91H	205/60 R15	91H	205/55 R16	91H	205/50 R16	87H	235/45 R18 RF	98V
195/65 R15 RF	95H	205/60 R16	92H	205/55 R16 RFT	91H	205/50 R16 RF	91H	245/45 R17 RF	99V
205/65 R15	94H	215/60 R16	95H	215/55 R16	93H	225/50 R16 RF	96V	245/45 R18 RF	100V
215/65 R15	96H	225/60 R16	98H	225/55 R16	95H	205/50 R17 RF	93V	225/40 R18 RF	92V
205/65 R16	95H	235/60 R16	100H	215/55 R17 RF	98V	215/50 R17	91H	235/40 R18 RF	95V
215/65 R16	98H	185/55 R14	80H	225/55 R17	97H	225/50 R17 RF	98V	235/40 R18 RF	98V
215/65 R16 RF	102T	185/55 R15	82H	225/55 R17 RF	101V	195/45 R16 RF	84H	245/40 R18 RF	97V
185/60 R14	82H	205/55 R15	88V	235/55 R17 RF	103V	205/45 R16 RF	87H	205/45 R17*	
195/60 R14	86H	205/55 R15 RF	92V	195/50 R15	82H	215/45 R17 RF	91V	225/45 R18*	

## W 850 Icegripper

RF: REINFORCED  
RFT: RUN FLAT  
\*UNDER DEVELOPMENT



## TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.







ST 430 A/S



ST 440 A/T



ST 450 H/T



W 870





SUV, 4X4 TIRES

*Best Quality  
Suv, 4x4 Tires*

# ST 430 A/S Incurro

With ultimate rubber repletion rate and special tread mixture, great wear performance on dry surfaces and high elasticity and grip performance in low temperatures. ST 430 is a perfect four-season and 4x4 tire with special tread structure, increasing the grip performance on wet surfaces. You can discover the wild when living in the city with its esthetic tread design and structure, optimized for four seasons.



## UNIQUE FOUR SEASON PERFORMANCE

### ■ PATTERN PROPERTIES



- On the outside of the tire, the structure of the shoulder with a specially designed high-corning conditions, the ability to use all four seasons



- Circumferential 4-Channel, rapid and effective water discharge



- Stylish asymmetrical pattern design with an impressive appearance



- Computer-designed block sequence. Minimized road/pattern noise and high ride comfort





## ■ ALL SIZES

235/75 R15	A/S	105H	215/65 R17	A/S	99H
205/70 R15	A/S	96H	225/65 R17	A/S	102H
215/70 R15	A/S	98H	235/65 R17 RF	A/S	108H
215/70 R16	A/S	100H	245/65 R17 RF	A/S	111H
225/70 R16 RF	A/S	107T	255/65 R16	A/S	109H
235/70 R16	A/S	106H	255/65 R17	A/S	110H
245/70 R16	A/S	107H	265/65 R17	A/S	112H
265/70 R16	A/S	112T	215/60 R16	A/S	95H
255/70 R16	A/S	111T	225/60 R17 RF	A/S	103H
215/65 R16	A/S	98H	235/60 R16	A/S	100H
215/65 R16 RF	A/S	102H			

RF: REINFORCED

## ST 430 A/S Incurro



## ■ TECHNOLOGY & BENEFITS

High Tech  
Undertread  
Construction

Jointless "0" degree spiral  
nylon cover and wide  
steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono  
Strand Bead Wire and  
Hard Bead Filler

Strengthens the link between  
tire and rim for a more precise  
driving experience.

Improve lateral stability in high speed cornering and  
uniformity for smoother ride.



# ST 440 A/T Incurro

ST 440, developed for any pickup, provides ultimate traction and acceleration on any surface.



## UNIQUE TRACTION ON ANY SURFACE

### ■ PATTERN PROPERTIES



- Stability on stream driving routes with circular block on the center



- Ultimate traction and balanced drive with reinforce block structure



- High grip on wet surface



- Special shouder design helps for achieving necessary traction ehen tire sinks in sand or mud



### ■ ALL SIZES

- 205/80 R16 RF A/T 104T
- 235/75 R15 A/T 105T
- 255/70 R15 A/T 108T
- 265/70 R15 A/T 112T
- 265/70 R15 RF A/T 116T
- 245/70 R16 RF A/T 111T
- 215/65 R16 A/T 98T
- 235/65 R17 RF A/T 108H

RF: REINFORCED

### ST 440 A/T Incurro



### ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 450 H/T Incurro

ST 450 is a low-profile high performance radial tire for sport utility vehicles & pick-up trucks. Its specially developed treadcompound provides maximum grip on wet and dry surfaces. ST 450 offers high speed, comfort and security all at the same time.



## PREMIUM SUMMER HIGH PERFORMANCE TIRE WITH EXCEPTIONAL COMFORT.

Specially designed tread profile enables exceptional high-speed capabilities, superb handling and cornering response on dry and wet road conditions. Modern tread design and special tread compound provide fuel economy as well as durability.

### ■ PATTERN PROPERTIES



- Center block contacts the surface and provides a stable and a balanced drive



- High performance on both dry and wet surfaces with asymmetrical pattern



- Reinforced and wide shoulder block increases the surface amount, contacting the surface and makes dry grip performance better. High curve turning property / maneuverability provides asymmetrical wear resistance.



- Outer side, designed more intense, provides grips dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



- Computer designed block array. Minimised road / pattern noise, high driving comfort



- Fast and effective water discharge with three circular canals



### ■ ALL SIZES

235/65 R17 RF H/T 108V  
 215/60 R17 H/T 96V  
 225/60 R18 H/T 100H  
 235/60 R17 H/T 102V  
 235/60 R18 RF H/T 107V  
 245/60 R18 H/T 105H  
 255/60 R17 H/T 106V ●●  
 255/60 R18 RF H/T 112V ●●

265/60 R18 H/T 110H ●●  
 265/60 R18 H/T 110V ●●  
 215/55 R18 H/T 95H  
 225/55 R19 H/T 99H  
 225/55 R18 H/T 98V  
 225/55 R17 H/T 97V  
 235/55 R17 RF H/T 103V  
 235/55 R18 H/T 100V

235/55 R19 RF H/T 105V  
 245/55 R19 H/T 103H  
 255/55 R18 RF H/T 109V ●●  
 255/55 R19 RF H/T 111V ●●  
 275/55 R19 H/T 111V ●●  
 235/50 R18 RF H/T 101V  
 255/50 R19 RF H/T 107V ●●  
 255/50 ZR19 RF RFT H/T 107W ●●

### ST 450 H/T Incurro

265/50 ZR19 RF H/T 110W ●●  
 275/45 ZR19 RF H/T 108W ●●  
 275/45 ZR20 RF H/T 110W ●●  
 285/45 R19 RF H/T 107V ●●  
 275/40 ZR20 RF H/T 102W ●●  
 315/35 ZR20 RF \*  
 315/35 ZR20 RF RFT \*

RF: REINFORCED  
 RFT: RUN FLAT  
 \*UNDER DEVELOPMENT



### ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.





# W 870 Incurro

A winter 4x4 tire ; strong block profile , developed for 4x4 vehicles provides stability .



## TRACTION AND GRIP IN WINTER CONDITIONS

### ■ PATTERN PROPERTIES



- High performance on icy and wet surfaces with Z-shaped sipes



- Stability on stream driving routes with circumferential block on the center



- Low noise and high driving comfort with V-shaped grooves



- High brake safety optimized block arrays and lateral channels



- High maneuverability and turning performance with reinforced block type at outside





WINTER



## ALL SIZES

205/80 R16 RF	104T	235/65 R17 RF	108V	235/55 R17 RF	103V
235/75 R15 RF	109T	245/65 R17 RF	111H	265/60 R18 RF	114H
205/70 R15	96T	255/65 R17 RF	114H	215/55 R18	95H
215/70 R15	98H	265/65 R17 RF	116H ●●	225/55 R18 RF	102H
215/70 R16 RF	104H	215/60 R17 RF	100H	235/55 R18 RF	104H
225/70 R16 RF	107H	225/60 R17 RF	103V	255/55 R18 RF	109V
235/70 R16	106T	235/60 R17 RF	106H	225/55 R19	99H
245/70 R16 RF	111T	255/60 R17 RF	110V	235/55 R19 RF	105V
255/70 R16	111T ●●	225/60 R18 RF	104V	245/55 R19	103H
265/70 R16	112T	235/60 R18 RF	107H	255/55 R19 RF	111V
215/65 R17	99H	245/60 R18 RF	105H	235/50 R18 RF	101V
225/65 R17 RF	106H	255/60 R18 RF	112H	235/50 R19 RF	103V

## W 870 Incurro

255/50 R19 RF	107V
255/50 R19 RF RFT	107V
265/50 R20 RF	111H ●●
285/45 R19 RF	111H ●●
275/40 R20 RF	106V ●●
275/45 R20*	●●
315/35 R20*	

RF: REINFORCED

RFT: RUN FLAT

\*UNDER DEVELOPMENT



## TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.





starmaxx

50

ST 850



ST 850  
plus



ST 860





LIGHT TRUCK TIRES

ST 900



SUMMER WINTER



ST 950



WINTER



ST 960



WINTER



# ST 850 Provan

High driving performance and short brake distance with special tread on wet and dry surfaces... With the thin channel on the shoulders, wear rate remains on regular basis. Optimized block array provides low road / pattern noise.



## ULTIMATE PERFORMANCE AND LONG LIFE UNDER HEAVY LOAD

### ■ PATTERN PROPERTIES



- Z - shaped sipes on tread improve wet and dry handling /braking .



- Circumferential tiny groove on shoulder block provides even wear.



- Computer simulated pitch frequency minimises road / pattern noise and improves comfort for quieter ride.



- Circumferential 3-wide grooves provide excellent water drainage and improve aquaplaning significantly.





## ■ ALL SIZES

185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
195 R15 C	8PR	106/104R
195/75 R16 C	8PR	107/105R
165/70 R14 C	6PR	89/87R
225/70 R15 C	8PR	112/110R
225/70 R15 C	10PR	116/114R

## ST 850 Provan



## ■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 850 Provan Plus

ST 850 is a summer tire with its special compound ensure long life, driving comfort and good short breaking performance. Provides high grip performance while turning on corners with deep channels.



## ENJOY THE ROAD EVEN UNDER HEAVY LOAD

### ■ PATTERN PROPERTIES



- Better grip and traction on wet or dry surfaces with Z shape tread design.



- Spherulic formulized tread composition provides ultimate grip on asphalt.



- Computer designed block array. Minimized road/pattern noise, high driving comfort



- Circumferential 3-channel provides excellent water discharge.





## ■ ALL SIZES

5.00 R12 C	8PR	83/81P
155 R12 C	8PR	88/86N
155 R13 C	6PR	85/83N
185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
185 R15 C	8PR	103/102R
175/75 R16 C	8PR	101/99R
185/75 R16 C	8PR	104/102R
195/75 R16 C	8PR	107/105R
205/75 R16 C	8PR	110/108R

205/75 R16 C	10PR	113/111R
215/75 R16 C	8PR	113/111R
215/75 R16 C	10PR	116/114R
225/75 R16 C	8PR	118/116R
165/70 R14 C	6PR	89/87R
195/70 R15 C	8PR	104/102R
205/70 R15 C	8PR	106/104R
215/70 R15 C	8PR	109/107S
225/70 R15 C	8PR	112/110R
225/70 R15 C	10PR	116/114R

## ST 850 Provan Plus

205/65 R15 C	8PR	102/100T
205/65 R16 C	8PR	107/105T
215/65 R16 C	8PR	109/107R
225/65 R16 C	8PR	112/110R
235/65 R16 C	8PR	115/113R



## ■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.





# ST 860 Provan

ST 860 with its special compound provides short braking performance on wet and dry surfaces. With the thin channel on the shoulders, wear rate remains on regular basis.



## ULTIMATE PERFORMANCE IN SUMMER

### ■ PATTERN PROPERTIES



- Better grip and traction on wet or dry surfaces with Z shape tread design.



- Spherulitic formulated tread composition provides ultimate grip on asphalt.



- Computer designed block array. Minimized road/pattern noise, high driving comfort



- Circumferential 3-channel provides excellent water discharge.





## ■ ALL SIZES

205/75 R16 C	8PR	110/108R
215/75 R16 C	8PR	113/111R
215/75 R16 C	10PR	116/114R
225/70 R15 C	8PR	112/110R
205/65 R16 C	8PR	107/105T
215/65 R15 C	6PR	104/102T
215/65 R16 C	8PR	109/107R
235/65 R16 C	8PR	115/113R
235/65 R16 C	12PR	121/119R
285/65 R16 C	10PR	128N
195/60 R16 C	6PR	99/97T

## ST 860 Provan



## ■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 900 Proterra

With ultimate rubber repletion rate and special tread mixture , great wear performance on dry surfaces and high elasticity and grip performance in low temperatures . High wear resistance against wear with special shoulder structure . It is a splendid four-season tire, providing high handling performance and short brake distance with wave-shaped tread.



## MAXIMUM PERFORMANCE DURING FOUR SEASONS

### ■ PATTERN PROPERTIES



- It is a splendid four-season tire, providing high handling performance and short brake distance on icy and wet surfaces with wave-shaped tread.



- With ultimate rubber repletion rate and special tread mixture , great wear performance on dry surfaces and high elasticity and grip performance in low temperatures



- Computer simulated pitch frequency minimizes road / pattern noise improving comfort for quieter ride.



- Ultimate water discharge with circular 3-channel structure



- With special shoulder structure , high resistance against irregular wear





## ■ ALL SIZES

## ST 900 Proterra

155 R12 C	8PR	88/86N	205/70 R15 C	8PR	106/104R
155 R13 C	8PR	90/89R	215/70 R15 C	8PR	109/107R
185 R14 C	8PR	102/100R	225/70 R15 C	8PR	112/110R
195 R14 C	8PR	106/104R	205/65 R15 C	8PR	102/100T
185/75 R16 C	8PR	104/102R	205/65 R16 C	8PR	107/105T
195/75 R16 C	8PR	107/105R	215/65 R16 C	8PR	109/107R
205/75 R16 C	8PR	110/108R	225/65 R16 C	8PR	112/110R
215/75 R16 C	8PR	113/111R	235/65 R16 C	8PR	115/113R
225/75 R16 C	8PR	118/116R			
195/70 R15 C	8PR	104/102R			



## ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 950 Prowin

Ultimate grip and traction on snowy and icy surfaces with special tread design. Special shoulder structure provides high bend-turning performance and maneuverability. Tread mixture preserves its property in low temperatures and provides ultimate grip.



## DON'T WORRY ABOUT LOAD IN WINTER

### ■ PATTERN PROPERTIES



- Optimised shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



- Multi sipes improve handling and braking performance on snow and ice.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for quieter ride.



- Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



- Wide circumferential and lateral grooves provide exceptional water drainage and boost aquaplaning performance.



- Sharp edges on shoulder improve cornering.



WINTER



## ■ ALL SIZES

155 R12 C	8PR	88/86N	195/70 R15 C	8PR	104/102R
155 R13 C	6PR	85/83N	205/70 R15 C	8PR	106/104R
185 R14 C	8PR	102/100R	215/70 R15 C	8PR	109/107R
195 R14 C	8PR	106/104R	225/70 R15 C	8PR	112/110R
175/75 R16 C	8PR	101/99R	205/65 R15 C	8PR	102/100T
185/75 R16 C	8PR	104/102R	205/65 R16 C	8PR	107/105T
195/75 R16 C	8PR	107/105R	215/65 R16 C	8PR	109/107R
205/75 R16 C	8PR	110/108R	225/65 R16 C	8PR	112/110R
215/75 R16 C	8PR	113/111R	235/65 R16 C	8PR	115/113R
225/75 R16 C	8PR	118/116R	195/60 R16 C	6PR	99/97T

## ST 950 Prowin



## ■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



# ST 960 Prowin

ST 960 is a winter tire developed for vans. Its block type tread pattern with wavy sipes and specially designed winter compound make this tire a safety device which is needed for drivers and passengers on wet, snowy and icy roads.



TIRES FOR INCREASING THE SAFETY OF LIGHT TRUCKS  
DRIVING ON WET, SNOW OR ICE COVERED ROADWAYS.

## ■ PATTERN PROPERTIES



- Optimised shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



- Multi sipes and block type tread pattern improve grip and braking performance on snow and ice.



- Computer simulated pitch frequency minimizes road/ pattern noise improving comfort for quieter ride.



- Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



- Wide groovers provide exceptional water drainage and boost aquaplaning performance.





WINTER



## ■ ALL SIZES

185 R14 C	8PR	102/100 R	225/70 R15 C	8PR	112/110 R
195 R14 C	8PR	106/104 R	195/65 R16 C	8PR	104/102 T
185/75 R16 C	8PR	104/102 R	205/65 R16 C	8PR	107/105 T
195/75 R16 C	8PR	107/105 R	215/65 R16 C	8PR	109/107 R
205/75 R16 C	10PR	113/111 R	225/65 R16 C	8PR	112/110 R
215/75 R16 C	10PR	116/114 R	235/65 R16 C	10PR	121/119 R
225/75 R16 C	8PR	118/116 R	195/60 R16 C	6PR	99/97 T
205/70 R15 C	8PR	106/104 R			

## ST 960 Prowin



## ■ TECHNOLOGY & BENEFITS

High Tech  
Undertread  
Construction

Jointless "0" degree spiral  
nylon cover and wide  
steel belts

It improves uniformity for smoother ride, durability and lower rate of tread wear.

Jointless Mono  
Strand Bead Wire and  
Hard Bead Filler

Strengthens the link between  
tire and rim for a more precise  
driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.





## TECHNICAL DATA

### TOLERO ST 330

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/80 R12	77	T	412	190	35
145/70 R12	69	T	325	190	36
155/70 R12	73	T	365	190	36
165/70 R12	77	T	412	190	36
175/70 R12	80	T	450	190	36
155/80 R13	79	T	437	190	35
165/80 R13	83	T	487	190	35
165/80 R13 RF	87	R	545	170	41
145/70 R13	71	T	345	190	36
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
165/70 R13 RF	83	T	487	190	42
175/70 R13	82	T	475	190	36
185/70 R13	86	T	530	190	36
155/65 R13	73	T	365	190	36
165/65 R13	77	T	412	190	36
175/65 R13	80	T	450	190	36
175/80 R14	88	T	560	190	35
165/70 R14	81	T	462	190	36
165/70 R14	85	R	515	170	36
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
195/70 R14	91	T	615	190	36
155/65 R14	75	T	387	190	36
165/65 R14	79	T	437	190	36
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
195/65 R14	89	H	580	210	36
165/60 R14	75	T	387	190	36
165/80 R15	87	T	545	190	35
195/70 R15 RF	97	T	730	190	42
175/65 R15	84	T	500	190	36
185/65 R15	88	T	560	190	36
195/65 R15	91	T	615	190	36
195/65 R15 RF	95	T	690	190	32

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4.50B	4.00B,5.00B	157	533	F	C	69	2
4.50B	3.50B,4.00B,5.00B	150	509	F	C	69	2
4.50B	4.00,5.00B	157	523	F	C	69	2
5.00B	4.00B,4.50B,5.50B	170	537	F	C	69	2
5.00B	4.50B,5.50B,6.00B	177	551	E	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J	157	578	F	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J,5.50B,5½J	165	594	E	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J,5.50B,5½J	165	594	E	C	69	2
4.50B,4½J	3.50B,3½J,4.00B,4J,5.00B,5J	150	534	F	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J	157	548	F	C	69	2
5.00B,5J	4.00B,4J,4.50B,4½J,5.50B,5½J	170	562	F	C	69	2
5.00B,5J	4.00B,4J,4.50B,4½J,5.50B,5½J	170	562	E	C	69	2
5.00B,5J	4.50B,4½J,5.50B,5½J,6.00B,6J	177	576	E	C	69	2
5.50B,5½B	4.50B,4½J,5.00B,5J,6.00B,6J	189	590	E	C	69	2
4.50B,4½J	5.00B,5J,5.50B,5½J	157	532	F	C	69	2
5.00B,5J	4.50B,4½J,5.50B,5½J,6.00B,6J	170	544	F	C	69	2
5.00B,5J	5.50B,5½J,6.00B,6J	177	558	E	C	69	2
5J	4½J,5½J,6J	177	636	E	C	69	2
5.00B,5J	4J,4.50B,4½J,5.50B,5½J	170	588	E	C	69	2
5.00B,5J	4J,4.50B,4½J,5.50B,5½J	170	588	E	C	69	2
5.00B,5J	4½J,5.50B,5½J,6J	177	602	E	C	69	2
5.00B,5J	4½J,5.50B,5½J,6J	177	602	E	C	69	2
5½J	4½J,5J,6J	189	616	E	C	69	2
6J	5J,5½J,6½J	201	630	E	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J	157	558	F	C	69	2
5.00B,5J	4.50B,4½J,5.50B,5½J,6J	170	570	E	C	69	2
5.00B,5J	5.50B,5½J,6J	177	584	E	C	69	2
5.00B,5J	5.50B,5½J,6J	177	584	E	C	69	2
5½J	5J,6J,6½J	189	596	E	C	69	2
6J	5½J,6½J,7J	201	610	E	C	69	2
5.00B,5J	4½J,5½J,6J	170	554	F	C	69	2
4½J	4J,5J,5½J	165	645	E	C	69	2
6J	5J,5½J,6½J	201	655	C	C	69	2
5J	5½J,6J	177	609	E	C	69	2
5½J	5J,6J,6½J	189	621	E	C	69	2
6J	5½J,6½J,7J	201	635	E	C	69	2
6J	5½J,6½J,7J	231	635	E	C	69	2

Description

\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.



## TECHNICAL DATA

### NOVARO ST 532

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70 R13	82	H	475	210	36
175/70 R13	82	T	475	190	36
175/70 R14	84	H	500	210	36
175/70 R14 RF	88	H	560	210	36
185/70 R14	88	H	560	210	36
175/65 R14	82	H	475	210	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	H	530	210	36
185/60 R14	82	H	475	210	36
195/60 R14	86	H	530	210	36
175/65 R15	84	H	500	210	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	H	615	210	36
195/65 R15	91	V	615	240	36
195/65 R15 RF	95	H	690	210	42
205/65 R15	94	H	670	210	36
205/65 R15	94	V	670	240	36
215/65 R15	96	V	710	240	36
185/60 R15	84	H	560	210	42
185/60 R15 RF	88	H	500	210	36
195/60 R15	88	H	560	210	36
195/60 R15	88	V	560	240	36
205/60 R15	91	H	615	210	36
205/60 R15	91	V	615	240	36
185/55 R15	82	V	475	240	36
195/55 R15	85	V	515	240	36
205/55 R15	88	V	560	240	36
195/50 R15	82	V	475	240	36
205/50 R15	86	W	530	240	36
215/65 R16	98	H	70	210	36
205/65 R16	95	H	690	210	36
215/65 R16	98	V	750	240	36
205/60 R16	92	H	630	210	36
205/60 R16	92	V	630	240	36
195/55 R16	87	V	545	240	36
205/55 R16	91	H	615	210	36
205/55 R16	91	V	615	240	36
215/55 R16	93	H	650	210	36
215/55 R16	93	V	650	240	36
225/55 ZR16	95	W	690	270	36
205/50 ZR16	87	W	545	270	36
225/55 ZR17	97	W	730	270	36
205/55 ZR17 RF	93	W	650	270	42
225/50 R17 RF	98	W	750	270	42
215/45 ZR17	91	W	615	240	42
225/45 ZR17 RF	94	W	670	270	42

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5.00B,5J	4.50B,4 1/2J,5.50B,5 1/2J,6.00B,6J	177	576	E	B	70	2
5.00B,5J	4.50B,4 1/2J,5.50B,5 1/2J,6.00B,6J	177	576	E	B	70	2
5.00B,5J	4 1/2J, 5.50B,5 1/2J,6J	177	602	E	B	70	2
5.00B,5J	4 1/2J, 5.50B,5 1/2J,6J	177	602	E	B	70	2
5 1/2J	4 1/2J,5J,6J	187	616	E	B	70	2
5.00B,5J	5.50B,5 1/2J,6J	177	584	E	B	70	2
5.00B,5J	5.00B 5J 5.50B 5 1/2J 6J	176	588	E	B	70	2
5 1/2J	5J,6J, 6 1/2J	189	596	E	B	70	2
5 1/2J	5J,6J, 6 1/2J	189	578	E	B	70	2
6J	5 1/2J, 6 1/2J,7J	201	590	E	B	71	2
5J	5 1/2J,6J	177	609	E	B	70	2
5 1/2J	5J,6J, 6 1/2J	189	621	E	B	70	2
5 1/2J	5J,6J, 6 1/2J	189	621	C	B	70	2
6J	5 1/2J, 6 1/2J,7J	201	635	C	B	71	2
6J	5 1/2J, 6 1/2J,7J	201	635	C	B	71	2
6J	5 1/2J, 6 1/2J,7J	201	635	C	B	71	2
6J	5 1/2J, 6 1/2J,7J	209	647	C	B	71	2
6J	5 1/2J, 6 1/2J,7J,7 1/2J	209	647	C	B	71	2
6 1/2J	6J,7J,7 1/2J	221	661	C	B	71	2
5 1/2J	5J,6J, 6 1/2J	189	603	E	B	70	2
5 1/2J	5J,6J, 6 1/2J	189	603	E	B	70	2
6J	5 1/2J, 6 1/2J,7J	201	615	E	B	71	2
6J	5 1/2J, 6 1/2J,7J	201	615	E	B	71	2
6J	5 1/2J, 6 1/2J,7J, 7 1/2J	209	627	C	B	71	2
6J	5 1/2J, 6 1/2J,7J, 7 1/2J	209	627	C	B	71	2
6J	5J, 5 1/2J, 6 1/2J	194	585	E	B	70	2
6J	5 1/2J, 6 1/2J,7J	201	595	E	B	71	2
6 1/2J	5 1/2J,6J,7J, 7 1/2J	214	607	C	B	71	2
6J	5 1/2J, 6 1/2J,7J	201	577	E	B	71	2
6 1/2J	5 1/2J,6J,7J, 7 1/2J	214	578	E	B	71	2
6 1/2J	6J 6.5J 7J 7.5J	221	686	C	B	71	2
6J	5 1/2J, 6 1/2J,7J, 7 1/2J	209	672	C	B	71	2
6 1/2J	6J,7J,7 1/2J	221	689	C	B	71	2
6J	5 1/2J, 6 1/2J,7J, 7 1/2J	209	652	C	B	71	2
6J	5 1/2J, 6 1/2J,7J, 7 1/2J	209	652	C	B	71	2
6J	5 1/2J, 6 1/2J,7J	201	620	E	B	71	2
6 1/2J	5 1/2J,6J,7J, 7 1/2J	214	632	C	B	71	2
6 1/2J	5 1/2J,6J,7J, 7 1/2J	214	632	C	B	71	2
7J	6J,6 1.5J, 7 1/2J	226	642	C	B	71	2
7J	6J,6 1.5J, 7 1/2J	226	642	C	B	71	2
7J	6J,6 1.5J, 7 1/2J,8J	233	654	C	B	71	2
6 1/2J	5 1/2J,6J,7J, 7 1/2J	214	612	E	B	71	2
7J	6J,6 1.5J, 7 1/2J,8J	233	680	C	B	71	2
6 1/2J	5 1/2J,6J,7J, 7 1/2J	214	638	C	B	71	2
7J	6J, 6 1/2J, 7 1/2J,8J	233	658	C	B	71	2
7J	7 1/2J,8J	213	626	C	B	71	2
7 1/2J	7J,8J,8 1/2J	225	634	C	B	71	2

Description

\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.



## TECHNICAL DATA

### NATUREN ST 542

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
195/60 R15	88	H	560	210	36
205/55 R16	91	H	615	210	36

### NOVARO ST 552

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70 R14	84	H	500	210	36
175/65 R14	82	H	475	210	36
185/65 R14	86	H	530	210	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	H	615	210	36
195/65 R15 RF	95	H	690	210	42
185/60 R15	84	H	500	210	36
185/60 R15 RF	88	H	560	210	42
195/60 R15	88	H	560	210	36
205/55 R16	91	H	615	210	36

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.




\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6.0	5.5J 6J 6.5J 7J	201	615	C	B	69	2
6.5	5.5J 6J 6.5J 7J 7.5J	214	632	C	B	70	2



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5.00B - 5J	5.50B, 5½J, 6J	177	602	E	B	70	2
5.00B - 5J	5.50B, 5½J, 6J	177	584	E	B	70	2
5½J	5J, 5½J, 6J, 6½J	200	590	E	B	71	2
5½J	5J, 5½J, 6J, 6½J	192	595	E	B	70	2
5½J	5J, 5½J, 6J, 6½J	192	595	E	B	70	2
6J	5½J, 6J, 6½J, 7J	201	635	E	B	71	2
6J	5½J, 6J, 6½J, 7J	201	635	E	B	71	2
5½J	5J, 5½J, 6J, 6½J	189	603	E	B	70	2
5½J	5J, 5½J, 6J, 6½J	189	603	E	B	70	2
6J	5½J, 6J, 6½J, 7J	209	625	E	B	71	2
6½J	5½J, 6J, 6½J, 7J, 7½J	214	632	E	B	71	2

Description

- \*For load capacity on various speeds, and inflation figures, please consult your sales representative.
- \*Load capacity on standard speed and weight.
- \*Our company is entitled to make any change on any information in this catalogue, without further notice.
- \*This catalogue annuls all the previous catalogues.
- \*All figures are for reference; our company is not responsible for printing errors.



## TECHNICAL DATA

### NATUREN ST 562

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/80 R12	77	T	412	190	35
145/70 R12	69	T	325	190	36
155/70 R12	73	T	365	190	36
165/70 R12	77	T	412	190	36
175/70 R12	80	T	450	190	36
155/80 R13	79	T	437	190	35
165/80 R13	83	T	487	190	35
165/80 R13 RF	87	R	545	170	41
145/70 R13	71	T	345	190	36
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
165/70 R13 RF	83	T	487	190	42
175/70 R13	82	T	475	190	36
185/70 R13	86	T	530	190	36
155/65 R13	73	T	365	190	36
165/65 R13	77	T	412	190	36
175/65 R13	80	T	450	190	36
175/80 R14	88	T	560	190	35
165/70 R14	81	T	462	190	36
165/70 R14	85	R	515	170	36
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
195/70 R14	91	T	615	190	36
155/65 R14	75	T	387	190	36
165/65 R14	79	T	437	190	36
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
195/65 R14	89	H	580	210	36
165/60 R14	75	T	387	190	36
165/80 R15	87	T	545	190	35
195/70 R15 RF	97	T	730	190	42
175/65 R15	84	T	500	190	36
185/65 R15	88	T	560	190	36
195/65 R15	91	T	615	190	36
195/65 R15 RF	95	T	690	190	32

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4.50B	4.00B,5.00B	157	533	F	C	69	2
4.50B	3.50B,4.00B,5.00B	150	509	F	C	69	2
4.50B	4.00,5.00B	157	523	F	C	69	2
5.00B	4.00B,4.50B,5.50B	170	537	F	C	69	2
5.00B	4.50B,5.50B,6.00B	177	551	E	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J	157	578	F	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J,5.50B,5½J	165	594	E	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J,5.50B,5½J	165	594	E	C	69	2
4.50B,4½J	3.50B,3½J,4.00B,4J,5.00B,5J	150	534	F	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J	157	548	F	C	69	2
5.00B,5J	4.00B,4J,4.50B,4½J,5.50B,5½J	170	562	F	C	69	2
5.00B,5J	4.00B,4J,4.50B,4½J,5.50B,5½J	170	562	E	C	69	2
5.00B,5J	4.50B,4½J,5.50B,5½J,6.00B,6J	177	576	E	C	69	2
5.50B,5½B	4.50B,4½J,5.00B,5J,6.00B,6J	189	590	E	C	69	2
4.50B,4½J	5.00B,5J,5.50B,5½J	157	532	F	C	69	2
5.00B,5J	4.50B,4½J,5.50B,5½J,6.00B,6J	170	544	F	C	69	2
5.00B,5J	5.50B,5½J,6.00B,6J	177	558	E	C	69	2
5J	4½J,5½J,6J	177	636	E	C	69	2
5.00B,5J	4J,4.50B,4½J,5.50B,5½J	170	588	E	C	69	2
5.00B,5J	4J,4.50B,4½J,5.50B,5½J	170	588	E	C	69	2
5.00B,5J	4½J,5.50B,5½J,6J	177	602	E	C	69	2
5.00B,5J	4½J,5.50B,5½J,6J	177	602	E	C	69	2
5½J	4½J,5J,6J	189	616	E	C	69	2
6J	5J,5½J,6½J	201	630	E	C	69	2
4.50B,4½J	4.00B,4J,5.00B,5J	157	558	F	C	69	2
5.00B,5J	4.50B,4½J,5.50B,5½J,6J	170	570	E	C	69	2
5.00B,5J	5.50B,5½J,6J	177	584	E	C	69	2
5.00B,5J	5.50B,5½J,6J	177	584	E	C	69	2
5½J	5J,6J,6½J	189	596	E	C	69	2
6J	5½J,6½J,7J	201	610	E	C	69	2
5.00B,5J	4½J,5½J,6J	170	554	F	C	69	2
4½J	4J,5J,5½J	165	645	E	C	69	2
6J	5J,5½J,6½J	201	655	C	C	69	2
5J	5½J,6J	177	609	E	C	69	2
5½J	5J,6J,6½J	189	621	E	C	69	2
6J	5½J,6½J,7J	201	635	E	C	69	2
6J	5½J,6½J,7J	231	635	E	C	69	2

Description

\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.





## TECHNICAL DATA

### ULTRASPORT ST 730

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/60 R13	80	H	450	210	36
185/60 R13	80	V	450	240	36
185/55 R14	80	H	450	210	36
185/55 R14	80	V	450	240	36
195/45 R14	77	V	412	240	36
185/55 R15	82	H	475	210	36
185/55 R15	82	V	475	240	36
195/55 R15	85	V	515	240	36
205/55 R15	88	V	560	240	36
195/50 R15	82	V	475	240	36
205/50 ZR15	86	W	530	270	36
195/45 R15	78	V	425	240	36
205/45 R15	81	V	462	240	36
195/55 R16	87	V	545	240	36
205/55 R16	91	V	615	240	36
205/55 ZR16 RF	94	W	670	270	42
215/55 ZR16 RF	97	W	730	270	42
225/55 R16	95	V	690	240	36
195/50 R16	84	V	600	240	36
205/50 ZR16 RF	91	W	615	270	42
225/50 ZR16 RF	96	W	710	270	42
195/45 R16	80	V	450	240	36
205/45 ZR16 RF	87	W	545	270	42
205/40 ZR16 RF	83	W	487	270	42
215/40 ZR16 RF	86	W	530	270	42
225/40 ZR16	85	W	515	270	36
225/55 ZR17	97	W	730	270	36
205/50 ZR17 RF	93	W	650	270	42
215/50 ZR17	91	W	615	270	36
225/50 ZR17 RF	98	W	750	270	42
205/45 ZR17 RF	88	W	560	270	42
215/45 ZR17 RF	91	W	615	270	42
225/45 ZR17 RF	94	W	670	270	42
245/45 ZR17 RF	99	W	775	270	42
205/40 ZR17 RF	84	W	500	270	42
215/40 ZR17 RF	87	W	545	270	42
235/40 ZR17 RF	94	W	670	270	42
245/40 ZR17 RF	95	W	690	270	42
225/45 ZR18 RF	95	W	690	270	42
245/45 ZR18 RF	100	W	800	270	42
215/40 ZR18 RF	89	W	580	270	42
225/40 ZR18 RF	92	W	630	270	42
235/40 ZR18 RF	95	W	690	270	42
245/40 ZR18	93	W	650	270	36
215/35 ZR18 RF	84	W	500	240	42
225/35 ZR18 RF	87	W	545	270	42
245/35 ZR18 RF	92	W	630	270	42
255/35 ZR18 RF	94	W	670	270	42
225/40 ZR19	89	W	580	270	36
245/40 ZR19 RF	98	W	750	270	42
255/40 ZR19 RF	100	W	800	270	42
225/35 ZR19 RF	88	W	560	270	42
235/35 ZR19 RF	91	W	615	270	42
245/35 ZR19 RF	93	W	650	270	42

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5.50B, 5½J	5.00B, 5J, 6.00B, 6J, 6½J	189	552	E	C	70	2
5.50B, 5½J	5.00B, 5J, 6.00B, 6J, 6½J	189	552	E	C	70	2
6J	5J, 5½J, 6½J	194	560	E	C	70	2
6J	5J, 5½J, 6½J	194	560	E	C	70	2
6½J	6J, 7J, 7½J	195	532	E	C	71	2
6J	5J, 5½J, 6½J	194	585	E	C	70	2
6J	5J, 5½J, 6½J	194	585	E	C	70	2
6J	5½J, 6½J, 7J	201	595	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	607	E	C	71	2
6J	5½J, 6½J, 7J	201	577	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	587	E	C	71	2
6½J	6J, 7J, 7½J	195	557	E	C	71	2
7J	6½J, 7½J	206	565	E	C	71	2
6J	5½J, 6½J, 7J	201	620	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	C	C	71	2
7J	6J, 6½J, 7½J	226	642	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	654	C	C	71	2
6J	5½J, 6½J, 7J	201	602	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	612	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	632	C	C	71	2
6½J	6J, 7J, 7½J	195	582	E	C	71	2
7J	6½J, 7½J	206	590	E	C	71	2
7½J	7J, 8J	212	570	E	C	71	2
7½J	7J, 8J, 8½J	218	578	E	C	71	2
8J	7½J, 8½J, 9J	230	586	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	680	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	638	E	C	71	2
7J	6J, 6½J, 7½J	226	648	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	658	C	C	71	2
7J	6½J, 7½J	206	616	E	C	71	2
7J	7½J, 8J	213	626	E	C	71	2
7½J	7J, 8J, 8½J	225	634	C	C	71	2
8J	7½J, 8½J, 9J	243	652	C	B	71	2
7½J	7J, 8J	212	596	E	C	71	2
7½J	7J, 8J, 8½J	218	604	E	C	71	2
8½J	8J, 9J, 9½J	241	620	C	B	71	2
8½J	8J, 9J, 9½J	248	628	C	B	71	2
7½J	7J, 8J, 8½J	225	659	C	C	71	2
8J	7½J, 8½J, 9J	243	677	C	B	71	2
7½J	7J, 8J, 8½J	218	629	E	C	71	2
8J	7½J, 8½J, 9J	230	637	E	C	71	2
8½J	8J, 9J, 9½J	241	645	C	B	71	2
8½J	8J, 9J, 9½J	248	653	E	B	71	2
7½J	7J, 8J, 8½J, 9J	218	615	E	C	71	2
8J	7½J, 8½J, 9J	230	615	E	C	71	2
8½J	8J, 9J, 9½J	248	629	E	B	71	2
9J	8½J, 9½J, 10J	260	635	C	B	71	2
8J	7½J, 8½J, 9J	230	663	E	C	71	2
8½J	8J, 9J, 9½J	248	679	C	B	71	2
9J	8.5J 9J 9.5J 10J	256	695	C	B	71	2
8J	7½J, 8½J, 9J	230	641	E	C	71	2
8½J	8J, 9J, 9½J	241	647	E	B	71	2
8½J	8J, 9J, 9½J	248	655	E	B	71	2

Description

\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.



## TECHNICAL DATA

### ULTRASPORT ST 740

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
205/55 R 16	91	V	615	240	36

### ULTRASPORT ST 750

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
205/55 R 16	91	H	615	210	36
205/55 R 16	91	V	615	240	36

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.




\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	5½,6J,7J,7½J	214	632	C	B	71	2



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	5½,6J,7J,7½J	214	632	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	C	C	71	2

Description




- \*For load capacity on various speeds, and inflation figures, please consult your sales representative.
- \*Load capacity on standard speed and weight.
- \*Our company is entitled to make any change on any information in this catalogue, without further notice.
- \*This catalogue annuls all the previous catalogues.
- \*All figures are for reference; our company is not responsible for printing errors.



## TECHNICAL DATA

### ULTRASPORT ST 760

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/55 R14	80	V	450	240	36
185/55 R15	82	V	475	240	36
185/55 R16 RF	87	H	545	210	42
195/45 R16 RF	84	V	500	240	42
195/50 R15	82	V	475	240	36
195/50 R16	84	V	500	240	36
195/55 R15	85	V	515	240	36
195/55 R16	87	V	545	240	36
195/55 R16 RFT	87	V	545	240	36
205/40 ZR16 RF	83	W	487	270	42
205/40 ZR17 RF	84	W	500	270	42
205/45 ZR16 RF	87	W	545	270	42
205/45 ZR17 RF	88	W	560	270	42
205/50 ZR15	86	W	530	270	36
205/50 ZR16 RF	91	W	615	270	42
205/50 ZR17 RF	93	W	650	270	42
205/50 ZR17 RFT	89	W	580	270	36
205/55 ZR17	91	W	615	270	36
205/55 ZR16 RF	94	W	670	270	42
205/55 R16 RFT	91	V	615	240	36
215/35 ZR18 RF	84	W	500	270	42
215/40 ZR16 RF	86	W	530	270	42
215/40 ZR17 RF	87	W	545	270	42
215/40 ZR18 RF	89	W	580	270	42
215/45 R16 RF	90	V	600	240	42
215/45 ZR17 RF	91	W	615	270	42
215/45 ZR18 RF	93	W	650	270	42
215/50 ZR17 RF	95	W	690	270	42
215/55 ZR16 RF	97	W	730	270	42
215/55 ZR17 RF	98	W	750	270	42
215/60 R16 RF	99	V	775	240	42
225/35 ZR18 RF	87	W	545	270	42
225/40 ZR18 RF	92	W	630	270	42
225/40 ZR19 RF	93	W	650	270	42
225/45 ZR17 RF	94	W	670	270	42
225/45 ZR17 RFT	91	W	615	270	36
225/45 ZR18 RF	95	W	690	270	42
225/45 ZR18 RFT	91	W	615	270	36
225/45 ZR19 RF	96	W	710	270	42
225/50 ZR16 RF	96	W	710	270	42
225/50 ZR17 RF	98	W	750	270	42
225/50 ZR17 RFT	94	W	670	270	36
225/55 ZR17 RF	101	W	825	270	42
225/55 ZR16 RF	99	W	750	210	42
225/55 ZR17 RFT	97	W	730	270	36
225/60 R16	98	V	750	240	36
235/35 ZR19 RF	91	W	615	270	42
235/40 ZR17 RF	94	W	670	270	42
235/40 ZR18 RF	95	W	690	270	42
235/45 ZR17 RF	97	W	730	270	42
235/45 ZR18 RF	98	W	750	270	42
235/50 ZR18 RF	101	W	825	270	42
235/55 ZR17 RF	103	W	875	270	42
235/60 ZR16	100	W	800	270	36
245/35 ZR17 RF	87	W	545	270	36
245/35 ZR18 RF	92	W	545	270	42
245/35 ZR19 RF	93	W	545	270	42
245/35 ZR20 RF	95	W	690	270	42
245/40 ZR17 RF	95	W	690	270	42
245/40 ZR18	93	W	650	270	36
245/40 ZR18 RFT	93	W	650	270	36
245/40 ZR19 RF	98	W	750	270	42
245/40 ZR19 RFT	94	W	670	270	36
245/45 ZR17 RF	99	W	775	270	42
245/45 ZR18 RF	100	W	800	270	42
245/45 ZR18 RFT	96	W	710	270	36
245/45 ZR19 RF	102	W	850	270	42
245/45 ZR19 RFT	98	W	750	270	36
255/35 ZR18 RF	94	W	670	270	42
255/35 ZR19 RF	96	W	710	270	42
255/35 ZR19 RFT	92	W	630	270	36
255/40 ZR19 RF	100	W	800	270	42
255/45 ZR18 RF	103	W	875	270	42
275/35 ZR18 RF	99	W	775	270	42
275/35 ZR19 RF	100	W	800	270	42

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5J, 5½J, 6½J	193	563	E	C	70	2
6J	5J, 5½J, 6½J	194	585	C	C	70	2
6J	5J, 5½J, 6J, 6½J	191	610	E	C	70	2
6½J	6J, 7J, 7½J	195	582	C	C	71	2
6J	5½J, 6J, 6½J, 7J	213	573	C	C	71	2
6J	5½J, 6J, 6½J, 7J	195	608	C	C	71	2
6J	5½J, 6½J, 7J	216	589	C	C	71	2
6J	5½J, 6½J, 7J	201	620	C	C	71	2
6½J	5½J-6J-6½J-7J	200	621	E	C	71	2
7½J	7J, 8J	212	570	C	C	72	2
7½J	7J, 8J	230	592	C	C	71	2
7J	6½J, 7½J	206	590	C	C	71	2
7J	6½J, 7½J	206	616	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	587	C	C	71	2
6½J	5½J, 6J, 6½J, 7J, 7½J	214	612	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	638	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	640	E	B	72	2
6½J	5½J, 6J, 7J, 7½J	213	658	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	635	E	B	72	2
7½J	7J, 7½J, 8J, 8½J	216	613	E	B	71	2
7½J	7J, 8J, 8½J	218	578	C	C	71	2
7½J	7J, 8J, 8½J	232	600	C	C	71	2
7½J	7J, 8J, 8½J	218	629	C	C	71	2
7J	7J, 7½J, 8J	212	606	C	B	71	2
7J	7½J, 8J	227	622	C	C	71	2
7½J	7J, 8J	253	651	C	C	71	2
7J	6J, 6½J, 7½J	226	648	C	B	71	2
7J	6J, 6½J, 7J, 7½J	240	635	C	C	71	2
7J	6J, 6½J, 7J, 7½J	226	668	C	C	71	2
6½J	6J, 7J, 7½J	221	664	C	C	71	2
8J	7½J, 8½J, 9J	230	615	C	C	72	2
8J	7½J, 8½J, 9J	230	637	C	C	72	2
8J	7½J, 8½J, 9J	230	663	C	C	72	2
7½J	7J, 8J, 8½J	225	634	C	B	71	2
7½J	7J, 8J, 8½J	225	659	C	B	71	2
7½J	7J, 7½J, 8J, 8½J	226	660	E	B	71	2
7½J	7J, 8J, 8½J	225	693	C	C	72	2
7½J	7J, 7½J, 8J, 8½J	226	636	E	B	71	2
7J	6J, 6½J, 7½J, 8J	233	632	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	658	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	658	E	C	71	2
7J	6J, 6½J, 7J, 7½J, 8J	247	675	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	654	C	C	71	2
7J	6J, 6½J, 7J, 7½J, 8J	233	680	E	B	70	2
6½J	6J, 7J, 7½J, 8J	228	676	C	C	71	2
8J	8½J, 9J, 9½J	241	647	C	B	72	2
8,5J	8J, 9J, 9½J	241	620	C	C	72	2
8½J	8J, 9J, 9½J	241	645	C	C	72	2
8J	7½J, 8½J, 9J	236	644	C	B	72	2
8J	7½J, 8½J, 9J	236	669	C	B	72	2
7½J	6½J, 7J, 8J, 8½J	245	693	C	B	72	2
7½J	6½J, 7J, 7½J, 8J, 8½J	263	685	C	C	72	2
7J	6½J, 7½J, 8J, 8½J	240	585	C	C	71	2
8½J	8J, 9J, 9½J	243	608	C	C	71	2
8½J	8J, 9J, 9½J	243	608	C	B	71	2
8½J	8J, 9J, 9½J	248	655	C	B	72	2
8½J	8J, 8½J, 9J, 9½J	243	689	C	B	71	2
8½J	8J, 9J, 9½J	248	628	C	C	71	2
8J	9J, 9½J	248	653	C	B	71	2
8½J	8J-8½J-9J-9½J	246	660	E	B	72	2
8½J	8J, 9J, 9½J	248	678	C	C	71	2
8½J	8J, 9J, 9½J	248	679	E	C	71	2
8½J	7½J, 8J, 9J	243	652	C	C	72	2
8J	7½J, 8½J, 9J	243	677	C	B	72	2
8J	7½J-8J-8½J-9J	247	676	E	B	72	2
8J	7½J, 8½J, 9J	243	703	C	B	72	2
8J	7½J-8J-8½J-9J	244	707	E	B	72	2
9J	8½J, 9½J, 10J	253	639	C	C	72	2
9J	8½J, 9½J, 10J	253	665	C	C	72	2
9J	8½J, 9½J, 10J	254	664	E	B	71	2
9J	8½J, 9½J, 10J	258	692	C	B	72	2
8½J	8J, 9J, 9½J	255	687	C	B	72	2
9½J	9J, 10J, 10½J, 11J	268	656	C	C	73	2
9½J	9J, 10J, 10½J, 11J	268	682	C	B	72	2

## TECHNICAL DATA

### ICEGRIPPER W 810

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/80 R13	79	T	437	190	35
165/80 R13	83	T	487	190	35
145/70 R13	71	T	345	190	36
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
165/70 R13 RF	83	T	487	190	42
175/70 R13	82	T	475	190	36
185/70 R13	86	T	530	190	36
155/65 R13	73	T	365	190	36
165/65 R13	77	T	412	190	36
175/65 R13	80	T	450	190	36
175/80 R14	88	T	560	190	35
165/70 R14	81	T	462	190	36
165/70 R14 RF	85	R	515	170	42
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
195/70 R14	91	T	615	190	36
155/65 R14	75	T	387	190	36
165/65 R14	79	T	437	190	36
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
165/60 R14	75	T	187	190	36
195/70 R15 RF	97	T	730	190	42
175/65 R15	84	-	500	190	36

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4.50B,4½J	4.00,4J,5.00B,5J	157	578	F	E	71	2
4.50B,4½J	4.00,4J,5.00B,5J,5.50J,5½J	165	594	E	E	71	2
4.50B,4½J	3.50B,3½J,4.00B,4J,5.00B,5J	150	534	E	E	71	2
4.50B,4½J	4.00,4J,5.00B,5J	157	548	F	E	71	2
5.00B,5J	4.00B,4J,4.50B,4½J,5.50B,5½J	170	562	F	E	71	2
5.00B,5J	4.00B,4J,4.50B,4½J,5.50B,5½J	170	562	E	E	71	2
5.00B,5J	4.50B,4½J,5.50B,5½J,6.00B,6J	177	576	E	E	71	2
5.50B,5½JB	4.50B,4½J,5.00B,5J,6.00B,6J	189	590	E	E	71	2
4.50B,4½J	5.00B,5J,5.50B,5½J	157	532	E	E	71	2
5.00B,5J	4.50B,4½J,5.50B,5½J,6.00B,6J	170	544	E	E	71	2
5.00B,5J	5.50B,5½J,6.00B,6J	177	558	E	E	71	2
5J	4½J,5½J,6J	177	636	E	E	71	2
5.00B,5J	4J,4.50B,4½J,5.50B,5½J	170	588	E	E	71	2
5.00B,5J	4J,4.50B,4½J,5.50B,5½J	170	588	E	E	71	2
5.00B,5J	4½J,5.50B,5½J,6J	177	602	E	E	71	2
5.00B,5J	4½J,5.50B,5½J,6J	177	602	E	E	71	2
5½J	4½J,5J,6J	189	616	F	E	71	2
6J	5J,5½J,6½J	201	630	E	E	71	2
4.50B,4½J	5.00B,5J,5.50B,5½J	157	558	E	E	71	2
5.00B,5J	4.50B,4½J,5.50B,5½J,6J	170	570	F	E	71	2
5.00B,5J	5.50B,5½J,6J	177	584	E	E	71	2
5.00B,5J	5.50B,5½J,6J	177	584	E	E	71	2
5½J	5J,6J,6½J	189	596	E	E	71	2
5.00B,5J	4½J,5½J,6J	170	554	E	E	71	2
6J	5J,5½J,6½J	201	655	E	E	71	2
5J	5½J,6J	177	609	E	E	71	2

Description

- \*For load capacity on various speeds, and inflation figures, please consult your sales representative.
- \*Load capacity on standard speed and weight.
- \*Our company is entitled to make any change on any information in this catalogue, without further notice.
- \*This catalogue annuls all the previous catalogues.
- \*All figures are for reference; our company is not responsible for printing errors.








## TECHNICAL DATA

### ICEGRIPPER W 850

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/55 R14	80	H	450	210	36
185/55 R15	82	H	475	210	36
185/60 R14	82	H	475	210	36
185/60 R15	84	H	500	210	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/45 R16 RF	85	H	500	210	42
195/50 R15	82	H	475	210	36
195/50 R16	84	H	500	210	36
195/55 R15	85	H	515	210	36
195/55 R16	87	H	545	210	36
195/60 R14	86	H	530	210	36
195/60 R15	88	H	560	210	36
195/65 R15	91	H	615	210	36
195/65 R15 RF	95	H	690	210	42
205/45 R16 RF	87	H	545	210	42
205/50 R15	86	H	530	210	36
205/50 R16	87	H	545	210	36
205/50 R16 RF	91	H	615	210	42
205/50 R17 RF	93	V	650	240	42
205/55 R15	88	V	560	240	36
205/55 R15 RF	92	V	630	240	42
205/55 R16	88	V	560	240	36
205/55 R16 RFT	91	H	615	210	36
205/60 R15	91	H	615	210	36
205/60 R16	92	H	630	210	36
205/65 R15	94	H	670	210	36
205/65 R16	95	H	690	210	36
215/45 R17 RF	91	V	615	240	42
215/50 R17	91	H	615	210	36
215/55 R16	93	H	650	210	36
215/55 R17 RF	98	V	750	240	42
215/60 R16	95	H	690	210	36
215/65 R15	96	H	710	210	36
215/65 R16	98	H	750	210	36
215/65 R16 RF	102	T	850	190	42
225/40 R18 RF	92	V	630	240	42
225/45 R17 RF	94	V	670	240	42
225/50 R16 RF	96	V	710	240	42
225/50 R17 RF	98	V	750	240	42
225/55 R16	95	H	690	210	36
225/55 R17	97	H	730	210	36
225/55 R17 RF	101	V	825	240	42
225/60 R16	98	H	750	210	36
235/40 R18 RF	95	V	690	240	42
235/45 R17 RF	97	V	730	240	42
235/45 R18 RF	98	V	750	240	42
235/55 R17 RF	103	V	875	240	42
235/60 R16	100	H	800	210	36
245/40 R18 RF	97	V	730	240	42
245/45 R17 RF	99	V	775	240	42
245/45 R18 RF	100	V	800	240	42

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5J, 5½J, 6½J	194	560	E	C	71	2
6J	5J, 5½J, 6½J	194	585	E	C	71	2
5½J	5J, 6J, 6½J	189	578	E	C	71	2
5½J	5J, 6J, 6½J	189	603	E	C	71	2
5½J	5J, 6J, 6½J	189	621	E	C	71	2
5½J	5J, 6J, 6½J	189	621	E	C	71	2
6½J	6J 6½J 7J 7½J	211	572	E	C	71	2
6J	5½J, 6½J, 7J	201	577	E	C	71	2
6J	5½J, 6½J, 7J	201	602	E	C	71	2
6J	5½J, 6½J, 7J	201	595	E	C	71	2
6J	5½J, 6½J, 7J	201	620	E	C	71	2
6J	5½J, 6½J, 7J	201	590	E	C	71	2
6J	5½J, 6½J, 7J	201	615	E	C	71	2
6J	5½J, 6½J, 7J	201	635	E	C	71	2
6J	5½J, 6½J, 7J	201	635	E	C	71	2
7J	6½J 7J 7½J	219	588	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	587	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	612	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	612	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	638	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	607	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	607	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	607	E	C	71	2
6.5J	5½J-6J-6½J-7J-7½J	215	635	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	627	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	652	E	C	71	2
6J	5½J, 6½J, 7J	209	647	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	672	E	C	71	2
7J	7½J, 8J	213	626	E	C	71	2
7J	6J, 6½J, 7½J	226	648	E	C	71	2
7J	6J, 6½J, 7½J	226	642	E	C	71	2
7J	6J, 6½J, 7½J	226	668	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	221	664	E	C	71	2
6½J	6J, 7J, 7½J	221	661	E	C	71	2
6½J	6J, 7J, 7½J	221	686	E	C	71	2
6½J	6J 6½J 7J 7½J	231	685	E	C	71	2
8J	7½J, 8J, 8½J, 9J	230	637	E	C	71	2
7½J	7J, 8J, 8½J	225	634	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	632	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	658	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	654	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	680	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	680	E	C	71	2
6½J	6J, 7J, 7½J, 8J	228	676	E	C	71	2
8½J	8J 8½J 9J 9½J	246	644	E	C	71	2
8J	7.5J 8J 8.5J 9J	245	642	E	C	71	2
8J	7.5J, 8J, 8.5J, 9J	236	669	E	C	71	2
7½J	6½J, 7J, 8J, 8½J	257	684	E	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	688	E	C	71	2
8½J	8J, 9J, 9½J	248	653	E	C	71	2
8J	7½J, 8½J, 9J	243	652	E	C	71	2
8J	7½J, 8½J, 9J	243	677	E	C	71	2



## TECHNICAL DATA

### INCURRO A/S ST 430

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
205/70 R15	96	H	710	210	36
215/70 R15	98	H	750	210	36
235/75 R15	105	H	925	210	36
215/70 R16	100	H	800	210	36
225/70 R16 RF	107	T	975	190	42
235/70 R16	106	H	950	210	36
245/70 R16	107	H	975	210	36
265/70 R16	112	T	1120	190	36
255/70 R16	111	T	1090	190	36
215/60 R16	95	H	690	210	36
235/60 R16	100	H	800	210	36
235/60 R16	100	H	800	210	36
215/65 R16	98	H	750	210	36
215/65 R16 RF	102	H	850	210	42
255/65 R16	109	H	1030	210	36
215/65 R17	99	H	775	210	36
225/60 R17 RF	103	H	875	210	42
235/65 R17 RF	108	H	1000	210	42
225/65 R17	102	H	850	210	42
245/65 R17 RF	111	H	1090	210	42
255/65 R17	110	H	1160	210	36
265/65 R17	112	H	1120	210	36

### INCURRO A/T ST 440

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
205/80 R16 RF	104	T	900	190	42
235/75 R15	105	T	925	190	36
255/70 R15	108	T	1000	190	36
265/70 R15	112	T	1120	190	36
265/70 R15 RF	116	T	1250	190	42
245/70 R16 RF	111	T	1090	190	42
215/65 R16	98	T	750	190	36

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.




\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5J, 5½J, 6½J, 7J	209	669	E	E	70	2
6½J	5½J, 6J, 7J	229	680	E	E	70	2
6½J	6J, 7J, 7½J, 8J	241	728	C	E	71	2
6½J	5½J, 6J, 7J	229	705	C	E	70	2
6½J	6J, 7J, 7½J	234	719	C	E	71	2
7J	6J, 6½J, 7½J, 8J	246	731	C	E	71	2
7J	6½J, 7½J, 8J	248	750	C	E	71	2
8J	7J, 7½J, 8½J, 9J	272	778	C	E	72	2
7½J	6½J, 7J, 8J, 8½J	260	764	C	E	72	2
6½J	6J, 7J, 7½J, 8J	222	662	E	E	70	2
7J	6½J, 7½J, 8J, 8½J	241	684	C	E	71	2
6½J	6J, 7J, 7½J	221	686	E	E	70	2
6½J	6J, 7J, 7½J	221	686	C	E	70	2
7½J	7J, 8J, 8½J, 9J	264	734	C	E	72	2
6½J	6J, 7J, 7½J	222	712	E	E	70	2
6½J	6J, 7J, 7½J, 8J	230	724	E	E	71	2
6½J	6J, 7J, 7½J, 8J	228	703	C	E	72	2
7J	6½J, 7½J, 8J, 8½J	240	739	E	E	71	2
7J	6½J, 7½J, 8J, 8½J	240	739	C	E	71	2
7J	7½J, 8J, 8½J	247	748	C	E	71	2
7½J	7J, 8J, 8½J, 9J	263	761	C	E	72	2
8J	7½J, 8½J, 9J, 9½J	276	773	C	E	72	2



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5½J	5J, 6J, 6½J, 7J	209	727	E	E	71	2
6½J	6J, 7J, 7½J, 8J	244	726	E	E	71	2
7½J	6½J, 7J, 8J, 8½J	270	731	E	E	72	2
8J	7J, 7½J, 8½J, 9J	272	745	E	E	72	2
8J	7J, 7½, 8J, 8½J, 9J	273	745	E	E	73	2
7J	6½J, 7½J, 8J	248	750	E	E	71	2
6½J	6J, 7J, 7½J	228	678	E	E	71	2

Description

\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.



## TECHNICAL DATA

### INCURRO H/T ST 450

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
235/65 R17 RF	108	V	1000	240	42
215/60 R17	96	V	710	240	36
225/60 R18	100	H	800	210	36
235/60 R17	102	V	850	240	36
245/60 R18	105	H	925	210	36
255/60 R17	106	V	950	240	36
235/60 R18 RF	107	V	975	240	42
255/60 R18 RF	112	V	1120	240	42
265/60 R18	110	H	1060	210	36
265/60 R18	110	V	1060	240	36
215/55 R18	95	H	690	210	36
225/55 R19	99	H	775	210	36
225/55 R18	98	V	750	240	36
225/55 R17	97	V	730	240	36
235/55 R19 RF	105	V	925	240	42
235/55 R18	100	V	800	240	36
235/55 R17 RF	103	V	875	240	42
245/55 R19	103	H	875	210	36
255/55 R18 RF	109	V	1030	240	36
255/55 R19 RF	111	V	1090	240	36
275/55 R19 RF	111	V	1090	240	36
235/50 R18 RF	101	V	825	240	42
255/50 R19 RF	107	V	975	240	42
255/50 ZR19 RF RFT	107	W	975	270	42
265/50 ZR19 RF	110	W	1090	270	42
275/45 ZR19 RF	108	W	1000	270	42
285/45 R19 RF	107	V	975	240	36
275/45 ZR20 RF	110	W	1160	270	42
275/40 ZR20 RF	102	W	850	270	36

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIEMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
7J	6½J, 7½J, 8J, 8½J	240	738	C	C	72	2
6½J	6J, 7J, 7½J	221	690	C	C	71	2
6½J	6J, 7J, 7½J, 8J	228	727	C	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	714	C	C	71	2
7J	7½J, 8J, 8½	248	751	C	C	71	2
7½J	7J, 8J, 8½J, 9J	260	736	C	C	72	2
7J	6½J, 7½J, 8J, 8½	240	739	C	C	72	2
7½J	7J, 8J, 8½J, 9J	261	763	C	C	72	2
8J	7½J, 8½J, 9J, 9½J	272	775	C	C	72	2
8J	7½J, 8½J, 9J, 9½J	272	775	C	C	72	2
7J	6J, 6½J, 7½J	226	693	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	731	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	705	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	680	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	741	C	C	72	2
7½J	6½J, 7J, 8J, 8½J	245	715	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	690	C	C	72	2
7½J	7J, 8J, 8½J	253	753	C	C	71	2
8J	7J, 7½J, 8½J, 9J	230	702	C	C	73	2
8J	7J, 7½J, 8½J, 9J	230	730	C	C	73	2
8½J	7½J, 8J, 9J, 9½J	283	783	C	C	72	2
7½J	6½J, 7J, 8J, 8½J	240	688	C	C	72	2
8J	7J, 7½J, 8½J, 9J	265	739	C	C	73	2
8J	7J, 7½J, 8½J, 9J	258	745	C	C	73	2
8½J	7½J, 8J, 9J, 9½J	277	749	C	C	73	2
9J	8½J, 9,5J, 10J, 10½J	268	731	C	C	72	2
9½J	9J, 9½J, 10J, 10½J	283	740	C	C	72	2
9J	8½J, 9J, 9½J, 10J, 10½J	270	758	C	C	72	2
9½J	9J, 10J, 10½J, 11J	273	729	C	C	72	2

Description

- \*For load capacity on various speeds, and inflation figures, please consult your sales representative.
- \*Load capacity on standard speed and weight.
- \*Our company is entitled to make any change on any information in this catalogue, without further notice.
- \*This catalogue annuls all the previous catalogues.
- \*All figures are for reference; our company is not responsible for printing errors.



## TECHNICAL DATA

### INCURRO W 870

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
205/70 R15	96	T	710	190	36
205/80 R16 RF	104	T	900	190	41
215/55 R18	95	H	690	210	36
215/60 R17 RF	100	H	800	210	42
215/65 R17	99	H	775	210	36
215/70 R15	98	H	750	210	36
215/70 R16 RF	104	H	900	210	42
225/55 R18 RF	102	H	850	210	42
225/55 R19	99	H	775	210	36
225/60 R17 RF	103	V	875	240	42
225/60 R18 RF	104	V	900	240	42
225/65 R17 RF	106	H	950	210	42
255/65 R17 RF	114	H	1180	210	42
225/70 R16 RF	107	H	975	210	42
235/45 R17 RF	97	V	730	240	42
235/50 R18 RF	101	V	825	240	42
235/50 R19 RF	103	V	875	240	42
235/55 R17 RF	103	V	875	240	42
235/55 R18 RF	104	H	900	210	42
235/55 R19 RF	105	V	905	240	42
235/60 R17 RF	106	H	950	210	42
235/60 R18 RF	107	H	975	210	42
235/65 R17 RF	108	V	1000	240	42
235/70 R16	106	T	950	190	36
235/75 R15 RF	109	T	1030	190	42
245/45 R19	103	H	875	210	36
245/60 R18	105	H	925	210	36
245/60 R18 RF	105	H	925	210	36
245/65 R17 RF	111	H	1090	210	42
245/70 R16 RF	111	T	1090	190	42
255/50 R19 RF	107	V	975	240	42
255/50 R19 RFT	107	V	975	240	42
255/55 R18 RF	109	V	1030	240	42
255/55 R19 RF	111	V	1090	240	42
255/60 R17 RF	110	V	1060	240	42
255/60 R18 RF	112	H	1120	210	42
255/70 R16	111	T	1090	190	36
265/50 R20 RF	111	H	1090	210	42
265/60 R18 RF	114	H	1180	210	42
265/65 R17 RF	116	H	1250	210	42
265/70 R16	112	T	1120	190	36
275/40 R20 RF	106	V	950	240	42
275/55 R19	111	H	1090	210	36
285/45 R19 RF	111	H	1090	210	42

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

RECOM. (inch)	PERMITTED (inch)	INFLATED DIMENSION		EU TIRE LABEL			
		SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5J, 5½J, 6½J, 7J	214	664	E	C	70	2
5½J	5J, 6J, 6½J, 7J	209	728	E	C	70	2
7J	6J, 6½J, 7½J	238	691	E	C	70	2
6½J	6J, 7J, 7½J	237	687	E	C	70	2
6½J	6J, 7J, 7½J	231	705	E	C	70	2
6½J	5½J, 6J, 7J	233	678	E	C	70	2
6½J	5½J, 6J, 7J	233	706	E	C	70	2
7J	6J, 6½J, 7½J, 8J	244	703	C	C	70	2
7J	6J, 6½J, 7½J, 8J	244	725	C	C	70	2
6½J	6J, 7J, 7½J, 8J	247	700	C	C	70	2
6½J	6J, 7J, 7½J, 8J	247	725	C	C	70	2
6½J	6J, 7J, 7½J, 8J	238	722	C	C	70	2
7½J	7J, 8J, 8½J, 9J	270	758	C	C	70	2
6½J	6J, 7J, 7½J	238	719	C	C	70	2
8J	7½J, 8J, 8½J, 9J	245	642	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	258	688	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	245	719	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	245	690	C	C	70	2
7½J	6½J, 7J, 7½J, 8J, 8½J	263	713	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	263	735	C	C	70	2
7J	6½J, 7½J, 8J, 8½J	256	712	C	C	70	2
7J	6½J, 7½J, 8J, 8½J	256	737	C	C	70	2
7J	6½J, 7½J, 8J, 8½J	240	738	C	C	70	2
7J	6J, 6½J, 7½J, 8J	240	736	C	C	70	2
6½J	6J, 7J, 7½J, 8J	230	730	C	C	70	2
7½J	7J, 8J, 8½J	265	747	C	C	70	2
7J	7½J, 8J, 8½J	260	749	C	C	70	2
7J	7½J, 8J, 8½J	260	749	C	C	72	2
7J	7½J, 8J, 8½J	256	747	C	C	70	2
7J	6½J, 7½J, 8J	248	750	C	C	70	2
8J	7J, 7½J, 8½J, 9J	278	738	C	C	71	2
8J	7J, 7½J, 8½J, 9J	265	739	E	C	71	2
8J	7J, 7½J, 8½J, 9J	276	735	C	C	71	2
8J	7J, 7½J, 8½J, 9J	276	757	C	C	71	2
7½J	7J, 8J, 8½J, 9J	260	738	C	C	71	2
7½J	7J, 8J, 8½J, 9J	270	760	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	260	764	C	C	71	2
8½J	7½J, 8J, 8½J, 9J, 9½J	277	774	C	C	72	2
8J	7½J, 8½J, 9J, 9½J	272	775	C	C	70	2
8J	7½J, 8½J, 9J, 9½J	270	770	C	C	71	2
8J	7J, 7½J, 8½J, 9J	272	778	C	C	71	2
9½J	9J, 9½J, 10J, 10½J	278	728	E	C	73	2
8½J	7½J, 8J, 9J, 9½J	283	785	C	C	72	2
9½J	9J, 10J, 10½J	285	739	C	C	72	2

Description

\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.

\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.





## TECHNICAL DATA

### PROVAN ST 850

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
185 R 14C	8	102/100	R	1700	3200
195 R14 C	6	106/104	N	1900	3600
165/70 R14 C	8	89/87	R	1160	2180
195 R15 C	8	106/104	R	1900	3600
225/70 R15 C	10	112/110	R	2240	4240
225/70 R15 C	8	116/114	R	2500	4720
195/75 R16 C	8	107/105	R	1950	3700

### PROVAN ST 850 PLUS

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
5.00 R12 C	8	83/81	P	974	1848
155 R12 C	8	88/86	N	1120	2120
155 R13 C	6	85/83	N	1030	1948
185 R14 C	8	102/100	R	1700	3200
195 R14 C	8	106/104	R	1900	3600
165/70 R14 C	6	89/87	R	1160	2180
185 R15 C	8	103/102	R	1750	3400
195/70 R15 C	8	104/102	R	1800	3400
205/70 R15 C	8	106/104	R	1900	3600
215/70 R15 C	8	109/107	S	2060	3900
225/70 R15 C	8	112/110	R	2240	4240
225/70 R15 C	10	116/114	R	2500	4720
205/65 R15 C	8	102/100	T	1700	3200
175/75 R16 C	8	101/99	R	1650	3100
185/75 R16 C	8	104/102	R	1800	3400
195/75 R16 C	8	107/105	R	1950	3700
205/75 R16 C	8	110/108	R	2120	4000
205/75 R16 C	10	113/111	R	2300	4360
215/75 R16 C	8	113/111	R	2300	4360
215/75 R16 C	10	116/114	R	2500	4720
225/75 R16 C	8	118/116	R	2640	5000
205/65 R16 C	8	107/105	T	1950	3700
215/65 R16 C	8	109/107	R	2060	3900
225/65 R16 C	8	112/110	R	2240	4240
235/65 R16 C	8	115/113	R	2430	4600

Description


\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.




\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
170	65	5 J	5 1/2 J, 6J	188	650	E	A	72	2
170	65	5 1/2 J	5J, 6J	198	666	E	A	72	2
170	54	5J	4 1/2 J	170	588	E	A	72	2
170	65	5 1/2 J	5J, 6J	196	691	E	A	72	2
170	65	6 1/2 J	6J, 7J	228	697	E	A	72	2
170	80	6 1/2 J	6J, 7J	228	697	E	A	72	2
170	69	5 1/2 J	5J, 6J	196	698	E	A	71	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
150	65	3 1/2 J	3 1/2 J	141	564	F	B	71	2
140	65	4 1/2 J	4.00B, 4.50B, 4J, 5J	155	552	F	B	72	2
140	51	4 1/2 J	4.00B, 4.50B, 4J, 5.00B, 5J	154	572	F	B	72	2
170	65	5 1/2 J	5J, 6J	185	648	E	A	71	2
170	65	5 1/2 J	5J, 6J	200	668	E	A	72	2
170	54	5J	4 1/2 J	167	592	E	B	72	2
170	65	5 1/2 J	5J, 6J	186	675	E	A	71	2
170	65	6J	5J, 5.5J	196	651	E	A	72	2
170	65	6J	5 1/2 J, 6.5J	206	668	E	A	72	2
180	65	6 1/2 J	5 1/2 J, 6J, 7J	222	679	E	A	72	2
170	65	6 1/2 J	6J, 7J	225	696	E	A	72	2
170	80	6 1/2 J	6J, 7J	225	696	E	A	72	2
190	54	6J	5 1/2 J, 6 1/2 J	206	650	C	A	71	2
170	69	5J	4 1/2 J, 5J, 5 1/2 J	170	668	E	A	72	2
170	69	5J	5 1/2 J, 6J	180	684	E	A	72	2
170	69	5 1/2 J	5J, 6J	192	698	E	A	72	2
170	69	5 1/2 J	6J-6 1/2 J	200	712	E	A	72	2
170	76	5 1/2 J	6J, 6 1/2 J	200	712	E	A	72	2
170	69	6J	5 1/2 J, 6 1/2 J, 7J	216	728	E	A	72	2
170	76	6J	5 1/2 J, 6 1/2 J, 7J	216	728	E	A	72	2
170	76	6J	6 1/2 J, 7J	224	740	E	A	72	2
190	69	6J	5 1/2 J, 6 1/2 J	206	677	C	A	71	2
170	69	6 1/2 J	6J, 7J	219	684	E	A	72	2
170	69	6 1/2 J	6J, 7J	223	707	E	A	72	2
170	69	7J	6 1/2 J, 7 1/2 J	238	717	E	A	72	2



Description

- \*For load capacity on various speeds, and inflation figures, please consult your sales representative.
- \*Load capacity on standard speed and weight.
- \*Our company is entitled to make any change on any information in this catalogue, without further notice.
- \*This catalogue annuls all the previous catalogues.
- \*All figures are for reference; our company is not responsible for printing errors.

## TECHNICAL DATA

### PROVAN ST 860

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
225/70 R15 C	8	112/110	R	2240	4240
215/65 R15 C	6	104/102	T	1800	3400
205/75 R16 C	8	110/108	R	2120	4000
215/75 R16 C	8	113/111	R	2300	4360
215/75 R16 C	10	116/114	R	2500	4720
205/65 R16 C	8	107/105	T	1950	3700
215/65 R16 C	8	109/107	T	2060	3900
235/65 R16 C	8	115/113	R	2430	4600
235/65 R16 C	12	121/119	R	2900	5440
285/65 R16 C	10	128	N	3600	-
195/60 R16 C	6	99/97	T	1550	2920

### PROTERRA ST 900

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155 R12 C	8	88/86	N	1120	2120
155 R13 C	8	90/89	N	1200	2320
185 R14 C	8	102/100	R	1700	3200
195 R14 C	8	106/104	R	1900	3600
195/70 R15 C	8	104/102	R	1800	3400
205/70 R15 C	8	106/104	R	1900	3600
215/70 R15 C	8	109/107	R	2060	3900
225/70 R15 C	8	112/110	R	2240	4240
205/65 R15 C	8	102/100	T	1700	3200
185/75 R16 C	8	104/102	R	1800	3400
195/75 R16 C	8	107/105	R	1950	3700
205/75 R16 C	8	110/108	R	2120	4000
215/75 R16 C	8	113/111	R	2300	4360
225/75 R16 C	8	118/116	R	2640	5000
205/75 R16 C	8	107/105	T	1950	3700
215/65 R16 C	8	109/107	R	2060	3900
225/65 R16 C	8	112/110	R	2240	4240
235/65 R16 C	8	115/113	R	2430	4600

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.




\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
170	65	6½J	6J, 6½J, 7J	227	694	C	A	72	2
190	54	6J	5½J, 6J, 6½J, 7J	218	660	C	A	71	2
170	69	5½J	6J, 6½J	201	708	C	A	71	2
170	69	6J	5½J, 6½J, 7J	216	728	E	A	71	2
170	76	6J	5½J, 6½J, 7J	213	723	C	A	71	2
190	69	6J	5½J, 6½J	205	674	C	A	71	2
190	69	6½J	6J, 7J	218	682	C	A	71	2
170	69	7J	6½J, 7½J	240	716	C	A	72	2
170	83	7J	6.5J, 7J, 7.5J	240	716	C	A	72	2
140	76	8½J	8J, 9J	298	777	E	A	72	2
190	54	6J	5½J, 6½J	201	645	E	A	72	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4 ½J	4B, 4 ½B, 4J, 5J	157	550	F	C	71	2
140	54	4 ½J	4B, 4 ½B, 4J, 5B, 5J	157	578	F	C	71	2
170	65	5J	5 ½J, 6J	188	650	F	B	71	2
170	65	5 ½J	5J, 6J	198	666	F	A	71	2
170	65	6J	5J, 5 ½J, 6J	201	655	F	A	71	2
170	65	6J	5 ½J, 6 ½J	209	669	F	A	71	2
170	65	6 ½J	5 ½J, 6J, 7J	221	683	F	A	71	2
170	65	6 ½J	6J, 7J	228	697	F	A	71	2
190	54	6J	5 ½J, 6 ½J	209	647	E	A	71	2
170	69	5J	4 ½B, 4 ½J, 5B, 5 ½J, 6B, 6 ½B	184	684	F	B	71	2
170	69	5 ½J	5J, 6J	196	698	F	A	71	2
170	69	5 ½J	6J, 6 ½J	203	714	F	A	71	2
170	69	6J	5 ½J, 6 ½J, 7J	216	728	F	A	71	2
170	76	6J	6 ½J, 7 ½J	223	744	F	A	71	2
190	69	6J	5 ½J, 6 ½J	209	672	E	A	71	2
170	69	6 ½J	6J, 7J	221	686	F	A	71	2
170	69	6 ½J	6J, 7J	228	698	F	A	71	2
170	69	7J	6 ½J, 7 ½J	240	712	F	A	71	2

Description

- \*For load capacity on various speeds, and inflation figures, please consult your sales representative.
- \*Load capacity on standard speed and weight.
- \*Our company is entitled to make any change on any information in this catalogue, without further notice.
- \*This catalogue annuls all the previous catalogues.
- \*All figures are for reference; our company is not responsible for printing errors.



## TECHNICAL DATA

### PROWIN ST 950

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155 R12 C	8	88/86	N	1120	2120
155 R13 C	8	90/89	N	1030	1948
185 R14 C	8	102/100	R	1700	3200
195 R14 C	8	106/104	R	1900	3600
195 / 70 R15 C	8	104/102	R	1800	3400
205 / 70 R15 C	8	106/104	R	1900	3600
215 / 70 R15 C	8	109/107	R	2060	3900
225 / 70 R15 C	8	112/110	R	2240	4240
205 / 65 R15 C	8	102/100	T	1700	3200
175 / 75 R16 C	8	104/102	R	1650	3100
185 / 75 R16 C	8	107/105	R	1800	3400
195 / 75 R16 C	8	110/108	R	1950	3700
205 / 75 R16 C	8	113/111	R	2120	4000
215 / 75 R16 C	8	118/116	R	2300	4360
225 / 75 R16 C	8	107/105	R	2640	5000
205 / 65 R16 C	8	109/107	T	1950	3700
215 / 65 R16 C	8	112/110	R	2060	3900
225 / 65 R16 C	8	115/113	R	2240	4240
235 / 65 R16 C	8	112/110	R	2430	4600
195 / 60 R16 C	6	99/97	T	1550	2930

### PROWIN ST 960

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
185 R14 C	8	102/100	R	1700	3200
195 R14 C	8	106/104	R	1900	3600
185/75 R16 C	8	104/102	R	1800	3400
195/60 R16 C	6	99/97	T	1550	2920
195/65 R16 C	8	104/102	T	1800	3400
195/75 R16 C	8	107/105	R	1950	3700
205/65 R16 C	8	107/105	T	1950	3700
205/75 R16 C	10	113/111	R	2300	4360
205/70 R15 C	8	106/104	R	1900	3600
215/65 R16 C	8	109/107	R	2060	3900
215/75 R16 C	10	116/114	R	2500	4720
225/75 R16 C	8	118/116	R	2640	5000
225/70 R15 C	8	112/110	R	2270	4240
225/65 R16 C	8	112/110	R	2270	4240
235/65 R16 C	10	121/119	R	2900	5440

Description




\*For load capacity on various speeds, and inflation figures, please consult your sales representative.

\*Load capacity on standard speed and weight.




\*Our company is entitled to make any change on any information in this catalogue, without further notice.

\*This catalogue annuls all the previous catalogues.

\*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4 ½ J	4B, 4½B, 4J, 5J	157	550	G	C	71	2
140	54	4 ½ J	4B, 4½B, 4J, 5B, 5J	157	578	G	C	71	2
170	65	5 J	5½J, 6J	188	650	G	B	71	2
170	65	5 ½ J	5J, 6J	198	666	G	B	73	2
170	65	6J	5J, 5½J, 6J	201	655	G	B	73	2
170	65	6J	5½J, 6½J	209	669	F	B	73	2
170	65	6 ½ J	5½J, 6J, 7J	221	683	F	B	73	2
170	65	6 ½ J	6J, 7J	228	697	F	B	72	2
190	54	6J	5½J, 6½J	209	647	F	B	73	2
170	69	5J	4 ½ J, 5½J,	177	668	G	B	73	2
170	69	5 J	4½B, 4½J, 5B, 5½B, 5½J, 6B, 6½B	184	684	G	B	73	2
170	69	5 ½ J	5J, 6J	196	698	G	B	73	2
170	69	5 ½ J	6J, 6 ½ J	203	714	F	B	73	2
170	76	6J	5½J, 6½J, 7J	216	728	F	B	73	2
170	69	6J	6½J, 7½J	223	744	F	B	73	2
190	69	6J	5½J, 6½J	209	672	F	B	73	2
170	69	6 ½ J	6J, 7J	221	686	F	B	73	2
170	69	6 ½ J	6J, 7J	228	698	F	B	73	2
170	69	7J	6 ½ J, 7 ½ J	240	712	F	B	73	2
190	54	6J	5½J, 6½J	201	640	G	B	73	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
170	65	5J	5½J, 6J	188	650	G	B	73	2
170	65	5½J	5J, 6J	198	666	F	B	73	2
170	69	5J	5½J, 6J	184	684	G	B	73	2
190	54	6J	5½J, 6½J	201	640	F	B	73	2
190	69	6J	5½J	201	660	G	B	73	2
170	69	5½J	5J, 6J	196	698	F	B	73	2
190	69	6J	5½J, 6½J	200	677	F	B	73	2
170	76	5½J	6J, 6½J	203	710	F	B	73	2
170	65	6J	5½J, 6½J	221	683	F	B	73	2
170	69	6½J	6J, 7J	215	690	F	B	73	2
170	76	6J	5½J, 6½J, 7J	216	728	F	B	73	2
170	76	6J	6½J, 7½J	225	747	F	B	73	2
170	65	6½J	6J, 7J	222	698	F	B	73	2
170	69	6½J	6J, 7J	228	698	F	B	73	2
170	80	7J	6 ½ J, 7½J	238	716	F	B	73	2

Description

- \*For load capacity on various speeds, and inflation figures, please consult your sales representative.
- \*Load capacity on standard speed and weight.
- \*Our company is entitled to make any change on any information in this catalogue, without further notice.
- \*This catalogue annuls all the previous catalogues.
- \*All figures are for reference; our company is not responsible for printing errors.









Starmaxx Passenger, Light Truck and 4x4 Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.





\*The visual content of the catalogue is only representative. To find the compatible tire for your car, please refer to the car service or authorized dealer.\*