



PCR-4X4&SUV LTR TIRES



 **starmaxx**
HIGH PERFORMANCE TIRES



CONTENTS

2 / Range of Starmaxx Tires

Passenger Tires
SUV, 4x4 Tires
LTR Tires

4 / Starmaxx Tires by Size

8 / General Information

Sidewall Markings
Radial Tire Construction
Important Definitions Related
Dimensions
Speed Index Table
Load Index Table

68 / Technical Table

PCR Tires
SUV, 4x4 Tires
LTR Tires

Passenger Tires

ST 330	ST 532	ST 542	ST 552	ST 562	ST 730	ST 740	ST 750	ST 760	W 810	W 850	ST 572*
16	18	20	22	24	26	28	30	32	36	38	40

SUV, 4X4 Tires

ST 430	ST 440	ST 450	W 870
44	46	48	50

LTR Tires

ST 850	ST 850 Plus	ST 860	ST 900	ST 950	ST 960	ST 970*
54	56	58	60	62	64	66

*UNDER DEVELOPMENT

RANGE OF TIRES

Passenger Tires



ST 330 TOLERO



ST 740 ULTRASPORT



ST 532 NOVARO



ST 750 ULTRASPORT



ST 542 NATUREN



ST 760 ULTRASPORT



ST 552 NOVARO



W810 ICEGRIPPER



ST 562 NATUREN



W850 ICEGRIPPER



ST 730 ULTRASPORT



ST 572 MAXXOUT
UNDER DEVELOPMENT
(All Season Tire)

SUV, 4x4 Tires



ST 430 INCURRO A/S



ST 860 PROVAN



ST 440 INCURRO A/T



ST 900 PROTERRA



ST 450 INCURRO H/T



ST 950 PROWIN



W870 INCURRO



ST 960 PROWIN

LTR Tires



ST 850 PROVAN



ST 970 PROWIN
UNDER DEVELOPMENT
(Winter Tire)



ST 850 PROVAN PLUS

TIRES BY SIZE

ST 330 Tolero

155/80 R12
155/80 R13
165/80 R13
165/80 R13 RF
175/80 R14
165/80 R15
145/70 R12
155/70 R12
165/70 R12
175/70 R12
145/70 R13
155/70 R13
165/70 R13
165/70 R13 RF
175/70 R13
185/70 R13
165/70 R14
165/70 R14 RF
175/70 R14
175/70 R14 RF
185/70 R14
195/70 R14
195/70 R15 RF
155/65 R13
165/65 R13
175/65 R13
155/65 R14
165/65 R14
175/65 R14
175/65 R14 RF
185/65 R14
195/65 R14
175/65 R15
185/65 R15
195/65 R15 RF
195/65 R15
165/60 R14



ST 532 Novaro

175/70 R13
175/70 R14
175/70 R14 RF
185/70 R14
175/65 R14
175/65 R14 RF
185/65 R14
175/65 R15
185/65 R15
185/65 R15 RF
195/65 R15
195/65 R15 RF
205/65 R15
205/65 R15 RF
215/65 R15
205/65 R16
215/65 R16
175/60 R13
185/60 R14
195/60 R14
185/60 R15
185/60 R15 RF
195/60 R15
205/60 R15
205/60 R15
205/60 R16
185/55 R15
195/55 R15
205/55 R15
195/55 R16
205/55 R16
215/55 R16
225/55 ZR16
225/55 ZR17
195/50 R15
205/50 R15
205/50 ZR16
205/50 ZR17 RF
225/50 ZR17 RF
215/45 ZR17 RF
225/45 ZR17 RF



ST 542 Naturen

175/70 R14
175/70 R14 RF
185/70 R14
175/65 R14
175/65 R14 RF
185/65 R14
185/65 R15
185/65 R15 RF
195/65 R15
195/65 R15 RF
205/65 R15
185/60 R14
185/60 R15
185/60 R15 RF
195/60 R15
205/60 R16
215/60 R16
185/55 R14
185/55 R15
195/55 R15
195/55 R16
205/55 R16
195/50 R15
195/50 R16 RF



ST 552 Novaro

175/70 R14
175/65 R14
185/65 R14
185/65 R15
185/65 R15 RF
195/65 R15
195/65 R15 RF
185/60 R15
185/60 R15 RF
195/60 R15
205/55 R16
195/55 R16
195/50 R16



ST 562 Naturen

165/80 R13
175/70 R13
175/70 R14
175/70 R14 RF
175/65 R14
175/65 R14 RF
185/65 R14
185/65 R15
185/65 R15 RF
195/65 R15
195/65 R15 RF
205/65 R15
205/65 R16
185/60 R13
185/60 R15 RF
185/60 R15
195/60 R15
205/60 R15
205/60 R16
195/55 R16
205/55 R16
215/55 R16
215/50 R17
215/50 ZR17
225/45 ZR17
205/55 R16*
215/55 R16*
215/50 R17*
215/55 R16*
215/50 R17*



ST 730 Ultrasport

185/60 R13
185/55 R14
185/55 R15
195/55 R15
205/55 R15
195/55 R16
205/55 R16
205/55 ZR16 RF
215/55 ZR16 RF
225/55 R16
225/55 ZR17
195/50 R15
205/50 ZR15
195/50 R16
205/50 ZR16 RF
225/50 ZR16 RF
205/50 ZR17 RF
215/50 ZR17
225/50 ZR17 RF
195/45 R14
195/45 R15
205/45 R15
195/45 R16
205/45 ZR16 RF
205/45 ZR17 RF
215/45 ZR17 RF
225/45 ZR17 RF
245/45 ZR17 RF
225/45 ZR18 RF
245/45 ZR18 RF
205/40 ZR16 RF
215/40 ZR16 RF
225/40 ZR16
245/40 ZR17 RF
205/40 ZR17 RF
215/40 ZR17 RF
235/40 ZR17 RF
215/40 ZR18 RF
225/40 ZR18 RF
235/40 ZR18 RF
245/40 ZR18
225/40 ZR19
245/40 ZR19 RF
255/40 ZR19 RF
215/35 ZR18 RF
225/35 ZR18 RF
265/35 ZR18 RF
225/35 ZR19 RF



ST 740 Ultrasport

205/55 R16



ST 750 Ultrasport

205/55 R16



ST 760 Ultrasport

215/60 R16 RF
225/60 R16
235/60 ZR16
185/55 R14
185/55 R15
195/55 R15
185/55 R16 RF
195/55 R16
195/55 RF16 RFT
205/55 ZR16 RF
205/55 RF16 RFT
215/55 ZR16 RF
225/55 ZR16 RF
205/55 ZR17
215/55 ZR17 RF
225/55 ZR17 RF
225/55 ZR17 RFT
235/55 ZR17 RF
235/55 ZR18 RF
195/50 R15



195/50 R16
205/50 ZR15
205/50 ZR16 RF
225/50 ZR16 RF
205/50 ZR17 RF
205/50 ZR17 RFT
215/50 ZR17 RF
225/50 ZR17 RF
225/50 RF17 RFT
235/50 ZR18 RF
245/50 ZR18
245/50 RF18 RFT
195/45 R16 RF
205/45 ZR16 RF
215/45 R16 RF
205/45 ZR17 RF
215/45 ZR17 RF
225/45 ZR17 RF
225/45 RF17 RFT
235/45 ZR17 RF
245/45 ZR17 RF
215/45 ZR18 RF
225/45 ZR18 RF
225/45 RF18 RFT
235/45 ZR18 RF
245/45 ZR18 RF
245/45 ZR18 RFT
255/45 ZR18 RF
225/45 ZR19 RF
235/45 ZR19 RF
245/45 ZR19 RF
245/45 ZR19 RFT
255/45 ZR19 RF
205/40 ZR16 RF
205/40 ZR17 RF
215/40 ZR16 RF
215/40 ZR17 RF
235/40 ZR17 RF
245/40 ZR17 RF
215/40 ZR18 RF
225/40 ZR18 RF
235/40 ZR18 RF
245/40 ZR18
245/40 ZR18 RFT
255/40 ZR18
225/40 ZR19 RF
245/40 ZR19 RF
245/40 ZR19 RFT
245/40 ZR20 RF
255/40 ZR20 RF
255/40 ZR19 RF
245/35 ZR17
215/35 ZR18 RF
225/35 ZR18 RF
245/35 ZR18 RF
255/35 ZR18 RF
265/35 ZR19 RF
265/35 ZR18 RF
275/35 ZR18 RF
215/35 ZR19 RF
225/35 ZR19 RF
235/35 ZR19 RF
245/35 ZR19 RF
255/35 ZR19 RF
255/35 ZR19 RFT
275/35 ZR19 RF

245/35 ZR20 RF
255/35 ZR20 RF
255/30 ZR19 RF
275/45 R18*
275/45 R18*
275/45 R18 RFT*
215/40 R18 RFT*
225/40 R18 RFT*
225/40 R19 RFT*
245/40 R20 RFT*
255/40 R18 RFT*
265/40 R18*
265/40 R19*
275/40 R18*
275/40 R18 RFT*
275/40 R19*
275/40 R19 RFT*
285/40 R19*
205/35 R18*
225/35 R19*
225/35 R19 RFT*
225/35 R20*
225/35 R20 RFT*
245/35 R18 RFT*
245/35 R19 RFT*
245/35 R20 RFT*
255/35 R18 RFT*
265/35 R19*
265/35 R20*
275/35 R18 RFT*
275/35 R19 RFT*
275/35 R20 RFT*
275/35 R20*
285/35 R18*
285/35 R18 RFT*
285/35 R19*
285/35 R19 RFT*
295/35 R18*
295/35 R19*
295/35 R20*
225/30 R20*
235/30 R20*
245/30 R19*
245/30 R19 RFT*
245/30 R20*
255/30 R19 RFT*
255/30 R20*
255/30 R20 RFT*
265/30 R19*
265/30 R20*
275/30 R19*
275/30 R19 RFT*
275/30 R20*
275/30 R20 RFT*
285/30 R19*
285/30 R19 RFT*
285/30 R20*
285/30 R20 RFT*
295/30 R19*
295/30 R20*
305/30 R19*
305/30 R20*
285/25 R20*
295/25 R20*
305/25 R20*

RF: REINFORCED

RFT: RUN FLAT

* UNDER DEVELOPMENT

TIRES BY SIZE

W 810 Icegripper

155/80 R13
165/80 R13
175/80 R14
145/70 R13
155/70 R13
165/70 R13
165/70 R13 RF
175/70 R13
185/70 R13
165/70 R14
165/70 R14 RF
175/70 R14
175/70 R14 RF
185/70 R14
195/70 R14
195/70 R15 RF
155/65 R13
165/65 R13
175/65 R13
155/65 R14
165/65 R14
175/65 R14
175/65 R14 RF
185/65 R14
175/65 R15
165/60 R14

W 850 Icegripper

185/65 R15
185/65 R15 RF
195/65 R15
195/65 R15 RF
205/65 R15
205/65 R16
215/65 R16
215/65 R16 RF
185/60 R14
195/60 R14
185/60 R15
195/60 R15
205/60 R15
205/60 R16
215/60 R16
225/60 R16
235/60 R16
185/55 R14
185/55 R15
185/55 R16 RF
195/55 R15
195/55 R16
205/55 R15
205/55 R15 RF

205/55 R16
205/55 RF16 **RFT**
205/55 R17
215/55 R16
225/55 R16
215/55 R17 RF
225/55 R17
225/55 R17 RF
235/55 R17 RF
195/50 R15
205/50 R15
195/50 R16
205/50 R16
205/50 R16 RF
225/50 R16 RF
205/50 R17 RF
215/50 R17
215/50 R18
225/50 R17 RF
235/50 R19 RF
245/50 R18 RF
195/45 R16 RF
205/45 R16 RF
205/45 R17 RF
215/45 R17 RF
215/45 R16 RF
215/45 R18 RF
225/45 R17 RF
225/45 R18 RF
235/45 R17 RF
235/45 R18 RF
245/45 R17 RF
245/45 R18 RF
245/45 R19 RF
225/40 R18 RF
235/40 R18 RF
245/40 R17 RF
245/40 R18 RF
245/40 R19 RF
255/40 R19 RF
225/55 R17 **RFT***
215/50 R18*
245/50 R18 **RFT***
225/45 R18 **RFT***
245/45 R18 **RFT***
245/45 R19 **RFT***
225/40 R18 **RFT***
245/40 R19 **RFT***

ST 572 Maxxout

195/65 R15 *
205/60 R16 *
205/55 R16 *
215/55 R16 *
225/55 R15 *
225/55 R17 *
225/45 R17 *



ST 440 Incurro A/T

205/80 R16 RF
235/75 R15
235/70 R16
255/70 R15
265/70 R15 RF
245/70 R16 RF
215/65 R16
265/60 R18 RF



ST 450 Incurro H/T

235/65 R17 RF
215/60 R17
225/60 R18
235/60 R17
235/60 R18 RF
245/60 R18
255/60 R17
255/60 R18 RF
265/60 R18
265/60 R18
215/55 R18
225/55 R19
225/55 R18
225/55 R17
235/55 R17 RF
235/55 R18
235/55 R19 RF
245/55 R19
255/55 R18 RF
255/55 R19 RF
275/55 R19 H/T
235/50 R18 RF
255/50 R19 RF
255/50 ZR19 RF **RFT**
265/50 ZR19 RF
275/45 ZR19 RF
275/45 ZR20 RF
285/45 R19
275/40 ZR20 RF
315/35 ZR20 RF*
315/35 ZR20 RF **RFT***

ST 430 Incurro A/S

235/75 R15
205/70 R15
215/70 R15
215/70 R16
225/70 R16 RF
235/70 R16
245/70 R16
265/70 R16
255/70 R16
215/65 R16
215/65 R16 RF
215/65 R17
225/65 R17
235/65 R17 RF
245/65 R17 RF
255/65 R16
255/65 R17
265/65 R17
215/60 R16
225/60 R17 RF
235/60 R16



W 870 Incurro

205/80 R16 RF
215/80 R15
235/75 R15 RF
205/70 R15
215/70 R15
215/70 R16 RF
225/70 R16 RF
235/70 R16
245/70 R16 RF
255/70 R16
265/70 R16
215/65 R17
225/65 R17 RF
235/65 R17 RF
245/65 R17 RF
255/65 R17 RF
265/65 R17 RF
215/60 R17 RF
225/60 R17 RF
235/60 R17 RF
255/60 R17 RF
225/60 R18 RF
235/60 R18 RF
245/60 R18 RF
255/60 R18 RF
265/60 R18 RF
235/55 R17 RF
205/55 R19 RF
215/55 R18
225/55 R18 RF
235/55 R18 RF
255/55 R18 RF
225/55 R19
235/55 R19 RF
245/55 R19
255/55 R19 RF
275/55 R19
235/50 R18 RF
235/50 R19 RF
255/50 R19 RF
255/50 RF19 RF RFT
265/50 R20 RF
245/50 R20
225/45 R19 RF
275/45 R20 RF
285/45 R19 RF
275/40 R20 RF
315/35 R20 RF
255/55 R18 RFT*
275/40 R20 RFT*
315/35 R20*
315/35 R20 RFT*



ST 850 Provan

195 R14 C
195 R15 C
225/70 R15 C



ST 850 Provan Plus

5.00 R12 C
155 R12 C
155 R13 C
185 R14 C
195 R14 C
185 R15 C
175/75 R16 C
185/75 R16 C
195/75 R16 C
205/75 R16 C
225/75 R16 C
165/70 R14 C
195/70 R15 C
205/70 R15 C
215/70 R15 C
225/70 R15 C
205/65 R15 C
205/65 R16 C
205/65 R15 C
205/65 R16 C
215/65 R16 C
225/65 R16 C
235/65 R16 C



ST 860 Provan

205/75 R16 C
215/75 R16 C
225/70 R15 C
195/65 R16 C
205/65 R16 C
215/65 R15 C
215/65 R16 C
235/65 R16 C
285/65 R16 C
195/60 R16 C



ST 900 Proterra

155 R12 C
155 R13 C
185 R14 C
195 R14 C
185/75 R16 C
195/75 R16 C
205/75 R16 C
215/75 R16 C
225/75 R16 C
195/70 R15 C
205/70 R15 C
215/70 R15 C
225/70 R15 C
205/65 R15 C
205/65 R16 C
215/65 R16 C
225/65 R16 C
235/65 R16 C



ST 950 Prowin

155 R12 C
155 R13 C
185 R14 C
195 R14 C
175/75 R16 C
185/75 R16 C
195/75 R16 C
205/75 R16 C
215/75 R16 C
225/75 R16 C
195/70 R15 C

205/70 R15 C
215/70 R15 C
225/70 R15 C
205/65 R15 C
205/65 R16 C
215/65 R16 C
225/65 R16 C
235/65 R16 C
195/60 R16 C



ST 960 Prowin

155 R12 C
155 R13 C
185 R14 C
195 R14 C
185/75 R16 C
195/75 R16 C
205/75 R16 C
215/75 R16 C
225/75 R16 C
195/70 R15 C
205/70 R15 C
225/70 R15 C
215/65 R15 C
195/65 R16 C
205/65 R16 C
215/65 R16 C
225/65 R16 C
235/65 R16 C
285/65 R16 C
195/60 R16 C



ST 970 Prowin

215/75 R16 C*
235/65 R16 C*



RF: REINFORCED
RFT: RUN FLAT
* UNDER DEVELOPMENT

SIDEWALL MARKINGS

There are certain markings on the sidewall of tires. You shall find these remarkable notices and properties below;

DOT Symbol:

Proves that tyre complies with DOT regulations.

European Commision of Economics Confirmation :

It is the legitimate proof that tires comply with all ECE directives and is represented by a common confirmation number.

Max. Load and Pressure Markings:

It is a necessary marking on sidewalls of tires which complies with DOT directives It consists of necessary information about max.load and pressure of tyres.

"European Commision of Economics" Tire Verification Symbol:

This symbol proves that the tyre complies with all necessary standards disclaimed by European Commision of Economics.

Construction Info:

It represents the ply ratings and type of material used in sidewall and base in accordance with DOT regulation.


UTQG Quality Indicator:

- **Wear Life Indicator:** a tire when tested under standard conditions, wear life as 100 according to the test tire life indicates proportionate . Tire life usage patterns, climate and road conditions may change significantly depending on the service properties. More than 100 very good, 100 'is good, 100' below the weak reputation.
- **Traction Class Indicator:** Under controlled conditions demonstrated the ability to stand on the rubber surface is wet. Traction grades, from highest to lowest, are AA, A, B and C.
- **Heat Resistance Indicator :** Tire's resistance to heat and shows the ability to throw heat. Traction grades, from highest to lowest, are AA, A, B and C.

Speed class and load index :

European ETRTO standards maximum load and maximum load the tire can be based on the maximum rate based on the mark is indicating.

- | | |
|----------------------------------|-----------------------------------|
| 1 – Brand Logo | 13 – Speed Index |
| 2 – Construction Information | 14 – Safety Warnings |
| 3 – Manufacturing Country | 15 – Outside |
| 4 – Max.Load and Pressure Rating | 16 – ECE approval number |
| 5 – Mold No | 17 – Max. Load Index |
| 6 – Construction Type | 18 – Tire Size |
| 7 – DOT Mark | 19 – Pattern Name |
| 8 – Factory Code | 20 – Temperature Resistance Index |
| 9 – Tubeless | 21 – Tire Road Grip Index |
| 10 – Product Code | 22 – Tire Wear Index Resistance |
| 11 – Date of Manufacture | 23 – UTOG Quality Indicator : |
| 12 – ECE approval mark | |

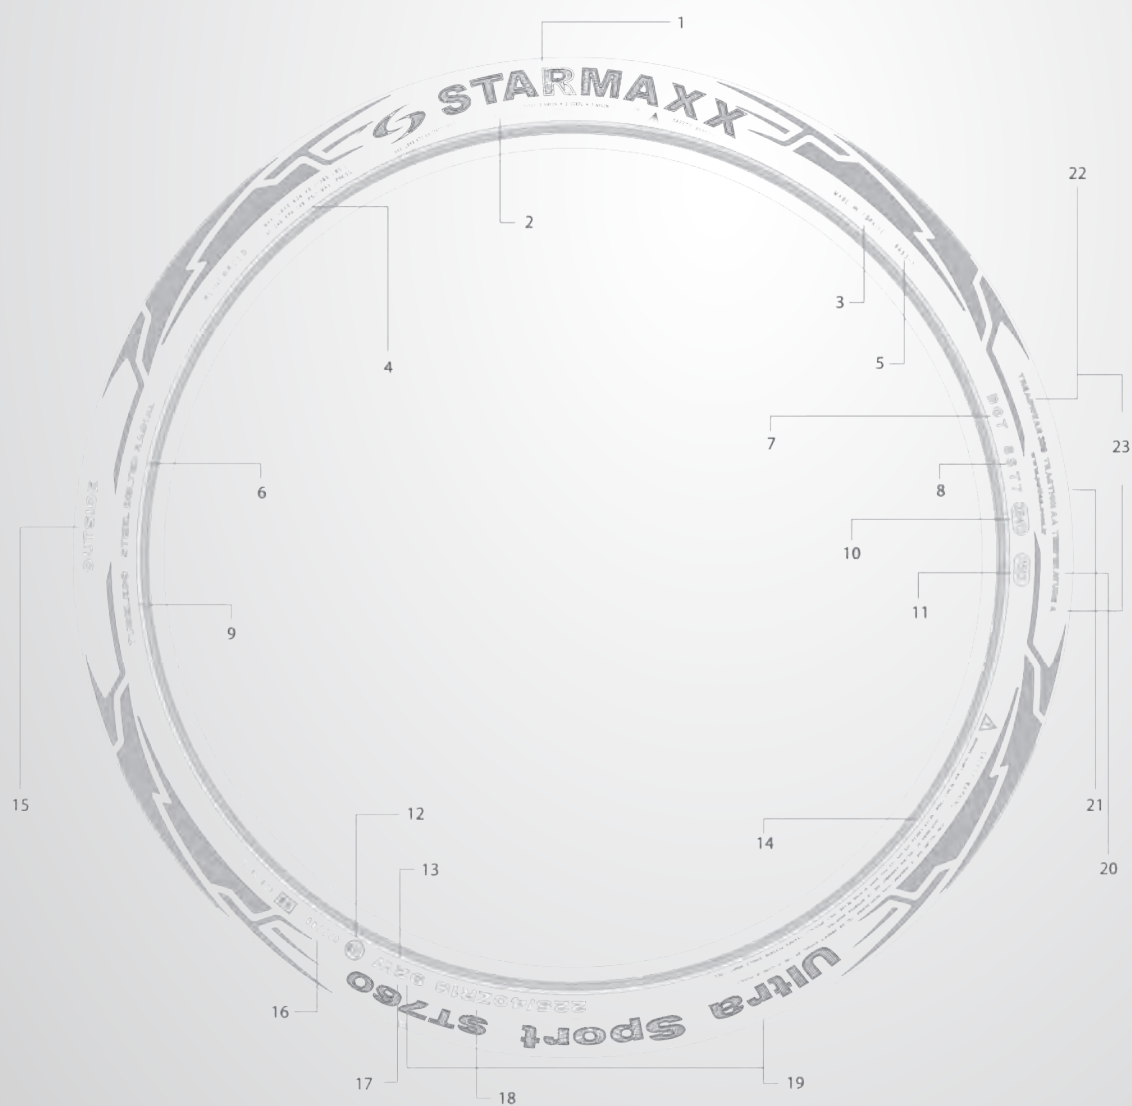

Starmaxx is behind of you!
Don't be afraid to travel on
challenging roads.



starmaxx
HIGH PERFORMANCE TIRES

www.starmaxx.com

RADIAL TIRE CONSTRUCTION


IMPORTANT DEFINITIONS RELATED TO THE TIRE

The tire is generally defined with such parameters as the maximum cross-section width corresponding to the standard inflation pressure in the measurement rim, nominal diameter of the rim to be attached, speed index, load capacity index and the cross-section ratio.


EXAMPLE :

Tire size 225 / 40ZR18 92W


- Cross – section width 225 mm (Max. distance between side-walls of an inflated tire)
- Series – the cross-section height to crosssection width (%55)
- Radial body structure (R)
- Symbol of rim diameter (inch) (18)
- Load index (92)
- Speed symbol (W)
- Serial no ; each producer's coding consisting of the production data
- Abrasion indicator (TWI) OR
- Usable in a tubeless way or with the tubetype usage
- Northern America Department of Transportation compliance symbol (DOT)
- European Community Compliance symbol and registry no (E)
- Arrow for direction of rotation, inside/outside

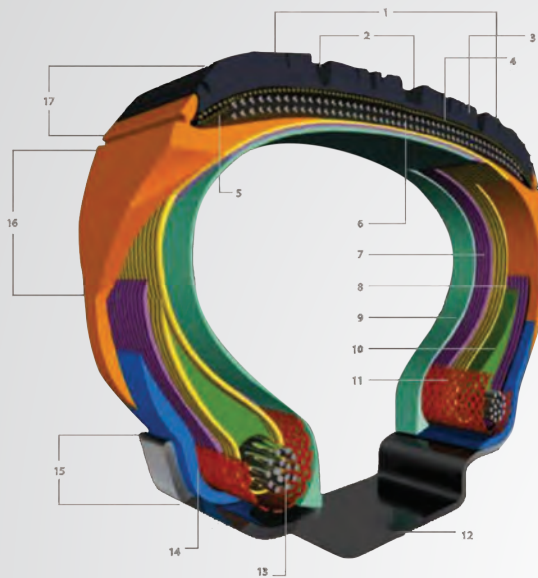

1. Tread
2. Water Channeling
3. Blocks
4. Nylon Impact Layer
5. Reinforcement Layer
6. Steel Cords
7. First Carcass Layer
8. Second Carcass Layer
9. Innerliner
10. Bead Filling
11. Bead Reinforcement fabric
12. Rim
13. Bead Wire
14. Rim Cushion
15. Rim Flange
16. Sidewall
17. Shoulder

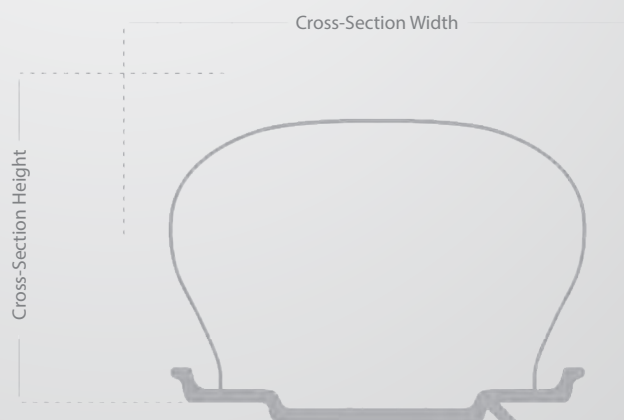

SPEED SYMBOL TABLE

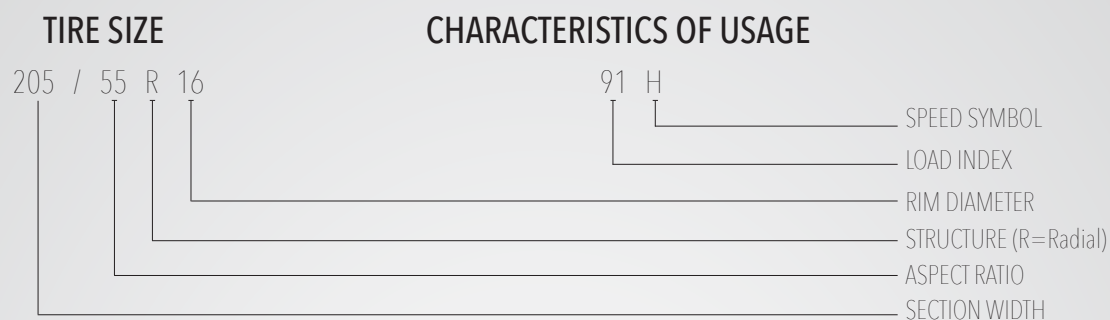

Speed Symbol Table

It is the alphabetical code of the velocity which the tire can perform.

Speed Symbol	Speed Limit (km/s)	Speed Symbol	Speed Limit (km/s)	Speed Symbol	Speed Limit (km/s)
A1	5	D	65	Q	160
A2	10	E	70	R	170
A3	15	F	80	S	180
A4	20	G	90	T	190
A5	25	J	100	U	200
A6	30	K	110	H	210
A7	35	L	120	V	240
A8	40	M	130	W	270
B	50	N	140	Y	300
C	60	P	150	ZR	270 km +

LOAD INDEX TABLE

Load Index Table

The load index is a symbol which shows the maximum load capacity of the vehicle per tire.

A	B	A	B	A	B	A	B	A	B	A	B
60	250	96	710	132	2000	168	5600	204	16000	240	45000
61	257	97	730	133	2060	169	5800	205	16500	241	46250
62	265	98	750	134	2120	170	6000	206	17000	242	47500
63	272	99	775	135	2180	171	6150	207	17500	243	48750
64	280	100	800	136	2240	172	6300	208	18000	244	50000
65	290	101	825	137	2300	173	6500	209	18500	245	51500
66	300	102	850	138	2360	174	6700	210	19000	246	53000
67	307	103	875	139	2430	175	6900	211	19500	247	54500
68	315	104	900	140	2500	176	7100	212	20000	248	56000
69	325	105	925	141	2575	177	7300	213	20600	249	58000
70	335	106	950	142	2650	178	7500	214	21200	250	60000
71	345	107	975	143	2725	179	7750	215	21800	251	61500
72	355	108	1000	144	2800	180	8000	216	22400	252	63000
73	365	109	1030	145	2900	181	8250	217	23000	253	65000
74	375	110	1060	146	3000	182	8500	218	23600	254	67000
75	387	111	1090	147	3075	183	8750	219	24300	255	69000
76	400	112	1120	148	3150	184	9000	220	25000	256	71000
77	412	113	1150	149	3250	185	9250	221	25750	257	73000
78	425	114	1180	150	3350	186	9500	222	26500	258	75000
79	437	115	1215	151	3450	187	9750	223	27250	259	77500
80	450	116	1250	152	3550	188	10000	224	28000	260	80000
81	462	117	1285	153	3650	189	10300	225	29000	261	82500
82	475	118	1320	154	3750	190	10600	226	30000	262	85000
83	487	119	1360	155	3875	191	10900	227	30750	263	87500
84	500	120	1400	156	4000	192	11200	228	31500	264	90000
85	515	121	1450	157	4125	193	11500	229	32500	265	92500
86	530	122	1500	158	4250	194	11800	230	33500	266	95000
87	545	123	1550	159	4375	195	12150	231	34500	267	97500
88	560	124	1600	160	4500	196	12500	232	35500	268	100000
89	580	125	1650	161	4625	197	12850	233	36500	269	103000
90	600	126	1700	162	4750	198	13200	234	37500	270	106000
91	615	127	1750	163	4875	199	13600	235	38750	271	109000
92	630	128	1800	164	5000	200	14000	236	40000	272	112000
93	650	129	1850	165	5150	201	14500	237	41250	273	115000
94	670	130	1900	166	5300	202	15000	238	42500	274	118000
95	690	131	1950	167	5450	203	15500	239	43750	275	121500

- (A) Load Index
(B) The weight a tyre can carry (kg)





ST 330



ST 532



ST 542



ST 552



ST 562



ST 730





PASSENGER CAR TIRES

ST 740



SUMMER



ST 750



SUMMER



ST 760



SUMMER



W 810



WINTER



W 850



WINTER



ST 572

UNDER DEVELOPMENT



SUMMER



WINTER



ST 330 Tolero

Developed for performance and handling for the general use segment.
Offer traction and riding comfort combining with durability.



PERFORMANCE HANDLING ANY ROAD

■ PATTERN PROPERTIES



- Circumferential rib on the tread center improves handling, and braking performance



- Stiff shoulder blocks enable exceptional cornering performance at high speeds, and provide resistance against irregular wear.



- Computer simulated block array minimizes road / pattern noise, and enhances driving comfort.



- Depending on the size of the tire, three or four different grooves provide excellent water drainage, and reduce the risk of aquaplaning significantly.





ALL SIZES

ST 330 Tolero

155/80 R12	77T	145/70 R13	71T	185/70 R14	88T●●	185/65 R14	86T●●
155/80 R13	79T	155/70 R13	75T	195/70 R14	91T●●	195/65 R14	89H●●
165/80 R13	83T	165/70 R13	79T	195/70 R15 RF	97T●●	175/65 R15	84T
165/80 R13 RF	87R	165/70 R13 RF	83T	155/65 R13	73T	185/65 R15	88T●●
175/80 R14	88T	175/70 R13	82T	165/65 R13	77T	195/65 R15 RF	95T●●
165/80 R15	87T	185/70 R13	86T●●	175/65 R13	80T	195/65 R15	91T●●
145/70 R12	69T	165/70 R14	81T	155/65 R14	75T	165/60 R14	75T
155/70 R12	73T	165/70 R14 RF	85R	165/65 R14	79T		
165/70 R12	77T	175/70 R14	84T	175/65 R14	82T		
175/70 R12	80T	175/70 R14 RF	88T	175/65 R14 RF	86T		

RF: REINFORCED



TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Patial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.
High Tech Cap Ply Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 532 Novaro

Designed and produced with latest technology. It offers good braking performance in both wet and dry conditions, also good mileage.



GRIP THE ROAD SAFELY

■ PATTERN PROPERTIES



- Circumferential plain block attached to the shoulder provides excellent handling and braking performance on dry and wet roads.



- Asymmetric tread pattern enables exceptional performance on dry and wet roads.



- Stiff shoulder blocks exceptional cornering performance at high speeds, and provide resistance against irregular wear.



- Computer simulated block array, inner and outer lateral channels minimize road / pattern noise, and enhance driving comfort.



- Four different grooves provide excellent water drainage, and reduce the risk of aquaplaning significantly.





ALL SIZES

175/70 R13	82H	195/65 R15	91H	195/60 R14	86H	195/55 R16	87V	205/50 R15	86V
175/70 R14	84H	195/65 R15 RF	95H	185/60 R15	84H	205/55 R16	91H	205/50 ZR16	87W
175/70 R14 RF	88H	205/65 R15	94H	185/60 R15 RF	88H	205/55 R16	91V	205/50 ZR17 RF	93W
185/70 R14	88H	205/65 R15	94V	195/60 R15	88H	215/55 R16	93H	225/50 ZR17 RF	98W
175/65 R14	82H	205/65 R15 RF	99H	195/60 R15	88V	215/55 R16	93V	215/45 ZR17 RF	91W
175/65 R14 RF	86T	215/65 R15	96V	205/60 R14	88V	205/55 R15	88V	225/45 ZR17 RF	94W
185/65 R14	86H	205/65 R16	95H	205/60 R15	91H	195/55 R16	87V	RF: REINFORCED	
175/65 R15	84H	215/65 R16	98H	205/60 R15	91V	205/55 R16	91H		
185/65 R15	88H	215/65 R16	98V	205/60 R16	92H	205/55 R16	91V		
185/65 R15 RF	92H	175/60 R13	77H	205/60 R16	92V	225/55 ZR16	95W		
195/65 R15	91V	185/60 R14	82H	185/55 R15	82V	225/55 ZR17	97W		
				195/55 R15	85V	195/50 R15	82V		



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption

High Tech
Cap Ply Construction


Jointless "0" degree spiral
nylon cover and wide
steel belts

High driving safety, comfort and durability.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 542 Naturen

Designed to be more fuel efficient with high mileage performance. Guarantees safety, durability and low rolling resistance



ECOLOGICALLY FRIENDLY FUEL SAVING PERFORMANCE

■ PATTERN PROPERTIES



- High performance on both dry and wet surfaces with asymmetrical pattern
- Optimized foot print, sipe / groove and sipe density to help for achieving good rolling resistance while securing safety.
- Computer designed block array.
Minimised road / pattern noise, high driving confort
- Fast and effective water discharge with three circular canals





■ ALL SIZES

175/70 R14	84T	195/65 R15	91H	215/60 R16	95V
175/70 R14 RF	88T	195/65 R15	91V	185/55 R14	80H
185/70 R14	88T	195/65 R15 RF	95T	185/55 R15	82V
175/65 R14	82T	205/65 R15	94H	195/55 R15	85H
175/65 R14 RF	86T	185/60 R14	82H	195/55 R16	87H
185/65 R14	86T	185/60 R15	84H	205/55 R16	91H
185/65 R15	88T	185/60 R15 RF	88H	195/50 R15	82H
185/65 R15	88H	195/60 R15	88H	195/50 R16 RF	88V
185/65 R15 RF	92H	205/60 R16	92H		
195/65 R15	91T	205/60 R16	92V		

ST 542 Naturen



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improve uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 552 Novaro

All season car tire which combines high performance on wet and dry conditions. Offer very good riding comfort and high mileage.



EXCEPTIONAL ALL SEASON PERFORMANCE.

■ PATTERN PROPERTIES



- Circumferential rib on the tread center improves handling, and braking performance



- Better grip and traction on wet surface with optimized sipe density.



- Computer simulated block array minimizes road /pattern noise, and enhances driving comfort.



- Four circumferential grooves provides excellent water drainage and reduce the risk of aquaplaning significantly





■ ALL SIZES

175/70 R14	84H	185/60 R15	84H
175/65 R14	82H	185/60 R15 RF	88H
185/65 R14	86H	195/60 R15	88H
185/65 R15	88H	205/55 R16	91H
185/65 R15 RF	92H	195/55 R16	87H
195/65 R15	91H	195/50 R16	84H
195/65 R15 RF	95H	RF: REINFORCED	

ST 552 Novaro



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Patented silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 562 Naturen

Naturen ST 562 is a passenger car tire with its special compound ensure long life, driving comfort and good breaking performance.



ENJOY THE ROAD WITH HIGH CONFORT

■ PATTERN PROPERTIES



■ Fast and effective water discharge with three circular canals.



■ High performance on both dry and wet surfaces with asymmetrical pattern



■ Better grip and traction on wet surface with four block array.



■ Computer designed block array.
Minimised road / pattern noise, high driving confort





■ ALL SIZES

165/80 R13	83T	195/65 R15 RF	95T	215/55 R16	93V
175/70 R13	82T	205/65 R15	94H	215/50 R17	91V
175/70 R14	84T	205/65 R15	94V	215/50 ZR17	91W
175/70 R14 RF	88T	185/60 R13	80H	225/45 ZR17	94V
175/65 R14	82T	185/60 R15 RF	88T	225/45 ZR17	94W
175/65 R14 RF	86T	185/60 R15	84H	205/55 R16*	
185/65 R14	86T	195/60 R15	88H	215/55 R16*	
185/65 R15 RF	92T	205/60 R16	92H	215/50 R17*	
185/65 R15	88T	205/60 R16	92V	215/55 R16*	
185/65 R15	88H	195/55 R16	87H	215/50 R17*	
195/65 R15	91T	205/55 R16	91H		
195/65 R15	91H	205/55 R16	91V		

ST 562 Naturen

RF: REINFORCED
*UNDER DEVELOPMENT



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.

High Tech Cap Ply

Jointless "0" degree spiral nylon cover and wide steel belts

It improve uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 730 Ultrasport

Designed and developed for ultra-high performance sport cars. Its aggressive pattern design and construction increase handling performance on both wet and dry surfaces.



URNS POWER INTO PERFORMANCE

PATTERN PROPERTIES



■ Esthetical pattern design



■ Strong shoulder blocks enable exceptional cornering performance at high speeds, and provide resistance against irregular wear



■ V-shaped grooves from crown center towards the shoulder provide effective water drainage , resulting in better wet-grip





ALL SIZES

185/60 R13	80H	225/55 R16	95V	195/45 R15	78V	215/40 ZR16 RF	86W	235/40 ZR18 RF	95W
185/55 R14	80H	225/55 ZR17	97W	205/45 R15	81V	225/40 ZR16	85W	225/40 ZR19	89W
185/55 R14	80V	195/50 R15	82V	195/45 R16	80V	245/40 ZR17 RF	95W	245/40 ZR19 RF	98W
185/55 R15	82H	205/50 ZR15	86W	205/45 ZR16 RF	87W	205/40 ZR17 RF	84W	255/40 ZR19 RF	100W
185/55 R15	82V	195/50 R16	84V	205/45 ZR17 RF	88W	215/40 ZR17 RF	87W	215/35 ZR18 RF	84W
195/55 R15	85V	205/50 ZR16 RF	91W	215/45 ZR17 RF	91W	235/40 ZR17 RF	94W	225/35 ZR18 RF	87W
205/55 R15	88V	225/50 ZR16 RF	96W	225/45 ZR17 RF	94W	215/40 ZR18 RF	89W	265/35 ZR18 RF	97W
195/55 R16	87V	205/50 ZR17 RF	93W	245/45 ZR17 RF	99W	225/40 ZR18 RF	92W	225/35 ZR19 RF	88W
205/55 R16	91V	215/50 ZR17	91W	225/45 ZR18 RF	95W	235/40 ZR18 RF	95W		
205/55 ZR16 RF	94W	225/50 ZR17 RF	98W	245/45 ZR18 RF	100W	245/40 ZR18	93W		
215/55 ZR16 RF	97W	195/45 R14	77V	205/40 ZR16 RF	83W				

ST 730 Ultrasport

RF: REINFORCED



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.

High Tech Undertread Construction


Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 740 Ultrasport

Special pattern design decreases noise and increase handling, also offers very good cornering performance at high speed levels. The outer shoulder construction increases the amount of surface area contacting the road. The inner shoulder increases the contact patch for better braking performance and stability.



MAXIMUM PERFORMANCE WITH HIGH ENGINEERING TECHNOLOGY

PATTERN PROPERTIES



- Fast and effective water discharge with three circular canals, one of which is wide



- High traction and braking capacity with special pattern



- High performance on both dry and wet surfaces with asymmetrical pattern



- Reinforced and wide shoulder block increases the surface amount, contacting the surface and makes dry grip performance better. High curving capability / maneuverability provides asymmetrical wear resistance.



- Outer side, designed more intense, provides better grip on dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



- Computer designed block array. Minimised road / pattern noise, high driving comfort



■ SIZE

205/55 R16 91V

ST 740 Ultrasport



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	High driving safety, comfort and durability.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 750 Ultrasport

The esthetic and modern pattern design blends performance, comfort and quality. Designed for ultra-high performance cars. Computer simulated pattern, and special tread compound enable optimum performance on wet and dry road conditions.



ENJOY THE ROAD WITH PERFECT DYNAMIC STRUCTURE

PATTERN PROPERTIES



- Center block contacts the surface and provides a stable and a balanced drive



- High performance on both dry and wet surfaces with asymmetrical pattern



- Reinforced and wide shoulder block increases the surface amount, contacting the surface and makes dry grip performance better. High curving capability / maneuverability provides asymmetrical wear resistance.



- Outer side, designed more intense, provides grips on dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



- Computer designed block array. Minimised road / pattern noise, high driving comfort



- Fast and effective water discharge with three circular canals



■ ALL SIZES

205/55 R16	91H
205/55 R16	91V

ST 750 Ultrasport



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

High driving safety, comfort and durability.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 760 Ultrasport

ST760 is produced for drivers who desire ultimate handling and grip performance without compromising comfort during driving at high speeds.



FOR THE ONES, HAVING DESIRE FOR
SPEED PERFORMANCE AND COMFORT

■ PATTERN PROPERTIES



- Center block contacts the surface and provides a stable and a balanced drive



- High performance on both dry and wet surfaces with asymmetrical pattern



- Reinforced and wide shoulder block increases the surface amount, contacting the surface and makes dry grip performance better. High curving capability / maneuverability provides asymmetrical wear resistance.



- Outer side, designed more intense, provides grips dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



- Computer designed block array.
Minimised road / pattern noise, high driving comfort



- Fast and effective water discharge with three circular canals



Specially designed tread profile enables exceptional high – speed capabilities , superb handling and cornering response on dry and wet road conditions. Modern tread design and special tread compound provide fuel economy as well as durability. ST 760 is developed for a wide range of vehicles, from sport cars to luxury cars.

*SEE NEXT PAGE FOR ALL SIZES



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.
High Tech Cap Ply Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 760 ULTRASPORT



■ ALL SIZES

215/60 R16 RF	99V
225/60 R16	98V
235/60 ZR16	100W
185/55 R14	80V
185/55 R15	82V
195/55 R15	85V
185/55 R16 RF	87H
195/55 R16	87V
195/55 RF16 RFT	87V
205/55 ZR16 RF	94W
205/55 RF16 RFT	91V
215/55 ZR16 RF	97W
225/55 ZR16 RF	99W
205/55 ZR17	91W
215/55 ZR17 RF	98W
225/55 ZR17 RF	101W
225/55 ZR17 RFT	97W
235/55 ZR17 RF	103W
235/55 ZR18 RF	104W
195/50 R15	82V
195/50 R16	84V
205/50 ZR15	86W
205/50 ZR16 RF	91W
225/50 ZR16 RF	96W
205/50 ZR17 RF	93W
205/50 ZR17 RFT	89W
215/50 ZR17 RF	95W
225/50 ZR17 RF	98W
225/50 RF17 RFT	94W
235/50 ZR18 RF	101W
245/50 ZR18	100W
245/50 RF18 RFT	100W
195/45 R16 RF	84V
205/45 ZR16 RF	87W
215/45 R16 RF	90V
205/45 ZR17 RF	88W
215/45 ZR17 RF	91W
225/45 ZR17 RF	94W
225/45 RF17 RFT	91W
235/45 ZR17 RF	97W
245/45 ZR17 RF	99W
215/45 ZR18 RF	93W
225/45 ZR18 RF	95W
225/45 RF18 RFT	91W
235/45 ZR18 RF	98W
245/45 ZR18 RF	100W
245/45 ZR18 RFT	96W
255/45 ZR18 RF	103W ●●
225/45 ZR19 RF	96W
235/45 ZR19 RF	99W
245/45 ZR19 RF	102W

245/45 ZR19 RFT	98W
255/45 ZR19 RF	104Y ●●
205/40 ZR16 RF	83W
205/40 ZR17 RF	84W
215/40 ZR16 RF	86W
215/40 ZR17 RF	87W
235/40 ZR17 RF	94W
245/40 ZR17 RF	95W
215/40 ZR18 RF	89W
225/40 ZR18 RF	92W
235/40 ZR18 RF	95W
245/40 ZR18	93W
245/40 ZR18 RFT	93W
255/40 ZR18	95W ●●
225/40 ZR19 RF	93W
245/40 ZR19 RF	98W
245/40 ZR19 RFT	94W
245/40 ZR20 RF	99W
255/40 ZR20 RF	101W ●●
255/40 ZR19 RF	100W ●●
245/35 ZR17	87W
215/35 ZR18 RF	84W
225/35 ZR18 RF	87W
245/35 ZR18 RF	92W
255/35 ZR18 RF	94W ●●
265/35 ZR19 RF	98W ●●
265/35 ZR18 RF	97W ●●
275/35 ZR18 RF	99W ●●
215/35 ZR19 RF	85W
225/35 ZR19 RF	88W
235/35 ZR19 RF	91W
245/35 ZR19 RF	93W
255/35 ZR19 RF	96W ●●
255/35 ZR19 RFT	92W ●●
275/35 ZR19 RF	100W ●●
245/35 ZR20 RF	95W
255/35 ZR20 RF	97W ●●
255/30 ZR19 RF	91W ●●
275/45 R18*	
275/45 R18*	
275/45 R18 RFT*	
215/40 R18 RFT*	
225/40 R18 RFT*	
225/40 R19 RFT*	
245/40 R20 RFT*	
255/40 R18 RFT*	
265/40 R18*	
265/40 R19*	
275/40 R18*	
275/40 R18 RFT*	
275/40 R19*	

ST 760 Ultrasport

275/40 R19 RFT*
285/40 R19*
205/35 R18*
225/35 R19*
225/35 R19 RFT*
225/35 R20*
225/35 R20 RFT*
245/35 R18 RFT*
245/35 R19 RFT*
245/35 R20 RFT*
255/35 R18 RFT*
265/35 R19*
265/35 R20*
275/35 R18 RFT*
275/35 R19 RFT*
275/35 R20 RFT*
275/35 R20*
285/35 R18*
285/35 R18 RFT*
285/35 R19*
285/35 R19 RFT*
295/35 R18*
295/35 R19*
295/35 R20*
225/30 R20*
235/30 R20*
245/30 R19*
245/30 R19 RFT*
245/30 R20*
255/30 R19 RFT*
255/30 R20*
255/30 R20 RFT*
265/30 R19*
265/30 R20*
275/30 R19*
275/30 R19 RFT*
275/30 R20*
275/30 R20 RFT*
285/30 R19*
285/30 R19 RFT*
285/30 R20*
285/30 R20 RFT*
295/30 R19*
295/30 R20*
305/30 R19*
305/30 R20*
285/25 R20*
295/25 R20*
305/25 R20*

RF: REINFORCED

RFT: RUN FLAT

*UNDER DEVELOPMENT

W 810 Icegripper

High performance winter tire thanks to its tread pattern enables high traction capability on icy surfaces. Cornering and handling no more be a problem on slippery surfaces for drivers.



GRIP THE ROAD SAFETY IN WINTER CONDITIONS

■ PATTERN PROPERTIES



- Wide lateral grooves and circumferential blocks improve braking performance on snow and ice



- Z- shaped multi sipes improve handling performance on snow and ice



- Computer designed block array.
Minimum road / pattern noise and high driving comfort



- Circumferential 3 wide grooves provide excellent water drainage and improve aquaplaning significantly.



ALL SIZES

155/80 R13	79T	165/70 R14 RF	85R	165/65 R14	79T
165/80 R13	83T	175/70 R14	84T	175/65 R14	82T
175/80 R14	88T	175/70 R14 RF	88T	175/65 R14 RF	86T
145/70 R13	71T	185/70 R14	88T ••	185/65 R14	86T ••
155/70 R13	75T	195/70 R14	91T ••	175/65 R15	84T
165/70 R13	79T	195/70 R15 RF	97T ••	165/60 R14	75T
165/70 R13 RF	83T	155/65 R13	73T	RF: REINFORCED	
175/70 R13	82T	165/65 R13	77T		
185/70 R13	86T ••	175/65 R13	80T		
165/70 R14	81T	155/65 R14	75T		

W 810 Icegripper



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Strengthens the link between tire and rim for a more precise driving experience.



W 850 Icegripper

The ideal winter tire for passenger cars. This tire maximizes your vehicle performance on snowy and icy surfaces. Provides confident stopping power and reliable handling during driving.



ULTIMATE PERFORMANCE ON SNOWY AND ICY SURFACES

■ PATTERN PROPERTIES



- Wide lateral grooves and circumferential blocks improve braking performance on snow and ice



- Z – shaped multi sipes improve handling performance on snow and ice



- V – shaped tread design on the inner side minimises noise and improves comfort



- High maneuverability and bend – turning capacity with outer block type base structure on the pattern



ALL SIZES

185/65 R15	88H	205/60 R15	91H
185/65 R15 RF	92H	205/60 R16	92H
195/65 R15	91H	215/60 R16	95H
195/65 R15 RF	95H	225/60 R16	98H
205/65 R15	94H	235/60 R16	100H
215/65 R15	96H	185/55 R14	80H
205/65 R16	95H	185/55 R15	82H
215/65 R16	98H	185/55 R16 RF	87H
215/65 R16 RF	102T	195/55 R15	85H
185/60 R14	82H	195/55 R16	87H
195/60 R14	86H	205/55 R15	88V
185/60 R15	84H	205/55 R15 RF	92V
195/60 R15	88H	205/55 R16	91H

205/55 RF16 RFT	91H
205/55 R17	91H
215/55 R16	93H
225/55 R16	95H
215/55 R17 RF	98V
225/55 R17	97H
225/55 R17 RF	101V
235/55 R17 RF	103V
195/50 R15	82H
205/50 R15	86H
195/50 R16	84H
205/50 R16	87H
205/50 R16 RF	91H

225/50 R16 RF	96V
205/50 R17 RF	93V
215/50 R17	91H
215/50 R18	92V
225/50 R17 RF	98V
235/50 R19 RF	103V
245/50 R18 RF	104V
195/45 R16 RF	84H
205/45 R16 RF	87H
205/45 R17 RF	88H
215/45 R17 RF	91V
215/45 R16 RF	90V
215/45 R18 RF	93V
225/45 R17 RF	94V
225/45 R18 RF	95V
235/45 R17 RF	97V
235/45 R18 RF	98V
245/45 R17 RF	99V

W 850 Icegripper

245/45 R18 RF	100V
245/45 R19 RF	102V
225/40 R18 RF	92V
235/40 R18 RF	95V
245/40 R17 RF	95V
245/40 R18 RF	97V
245/40 R19 RF	98V
255/40 R19 RF	100V
225/55 R17 RFT*	
225/50 R17 RFT*	
245/50 R18 RFT*	
225/45 R18 RFT*	
245/45 R18 RFT*	
245/45 R19 RFT*	
225/40 R18 RFT*	
245/40 R19 RFT*	

RF: REINFORCED
RFT: RUN FLAT
*UNDER DEVELOPMENT



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 572 Maxxout

It is an all season tire for using in wide range of weather and road conditions. The V-shaped channels offer effective discharge of water, mud and snow. Delivers excellent driving and cornering capabilities and assures safety on both ice and snow thanks to its unique pattern design and special compound. 3PMSF and M+S markings on the tire ensure better grip and braking on snowy roads.



UNIQUE FOUR SEASON PERFORMANCE

■ PATTERN PROPERTIES



■ Block design enables comfort driving and durability



■ Sipes improve handling performance and offers better grip and braking performance



■ V – shaped tread design on the inner side minimises noise and improves comfort



■ UNDER DEVELOPMENT SIZES

195/65 R15
205/60 R16
205/55 R16
215/55 R16
225/55 R15
225/55 R17
225/45 R17

ST572 Maxxout



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.





ST 430 A/S



ST 440 A/T



ST 450 H/T



W 870





SUV, 4X4 TIRES

*Best Quality
Suv, 4x4 Tires*

ST 430 A/S Incurro

High performance 4x4-SUV tire offers reliable performance through out the year. With its special compound mixture, it shows great traction performance on any kind of surface. Offers superb comfort and very low levels of noise and vibration.



UNIQUE FOUR SEASON PERFORMANCE

■ PATTERN PROPERTIES



- On the outside of the tire, the structure of the shoulder with a specially designed high-cornering conditions, the ability to use all four seasons



- Circumferential 4-Channel, rapid and effective water discharge



- Stylish asymmetrical pattern design with an impressive appearance



- Computer-designed block sequence. Minimized road/pattern noise and high ride comfort





■ ALL SIZES

235/75 R15 A/S	105H	215/65 R17 A/S	99H
205/70 R15 A/S	96H	225/65 R17 A/S	102H
215/70 R15 A/S	98H	235/65 R17 A/S RF	108H
215/70 R16 A/S	100H	245/65 R17 A/S RF	111H
225/70 R16 A/S RF	107T	255/65 R16 A/S	109H
235/70 R16 A/S	106H	255/65 R17 A/S	110H
245/70 R16 A/S	107H	265/65 R17 A/S	112H
265/70 R16 A/S	112T	215/60 R16 A/S	95H
255/70 R16 A/S	111T	225/60 R17 A/S RF	103H
215/65 R16 A/S	98H	235/60 R16 A/S	100H
215/65 R16 A/S RF	102H		

RF: REINFORCED

ST 430 A/S Incurro



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction


Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.



ST 440 A/T Incurro

Produced to meet the demands of high performance SUV and 4x4 vehicles. Reliable and long lasting all terrain tire thanks to its special compound. Special tread design improves braking performance and reduces irregular wear.



UNIQUE TRACTION ON ANY SURFACE

■ PATTERN PROPERTIES



- Stability on stream driving routes with circular block on the center



- Ultimate traction and balanced drive with reinforced block structure



- High grip on wet surface



- Special shoulder design delivers better traction on sand or mud.



■ ALL SIZES

205/80 R16 A/T RF 104T	245/70 R16 A/T RF 111T
235/75 R15 A/T 105T	215/65 R16 A/T 98T
235/70 R16 A/T 106T	265/60 R18 A/T RF 114T
255/70 R15 A/T 108T	
265/70 R15 A/T RF 116T	

ST 440 A/T Incurro

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 450 H/T Incurro

Summer tire developed for luxury SUVs. It combines quality and high performance with its specially developed tread design and compound. Block array maximizes grip performance in every driving situation. Offers short braking distance on wet surfaces.



PREMIUM SUMMER HIGH PERFORMANCE
TIRE WITH EXCEPTIONAL COMFORT.

PATTERN PROPERTIES



- Center block contacts the surface and provides a stable and a balanced drive



- High performance on both dry and wet surfaces with asymmetrical pattern



- Reinforced and wide shoulder block increases the surface amount, contacting the surface and makes dry grip performance better. High curving capability / maneuverability provides asymmetrical wear resistance.



- Outer side, designed more intense, provides grips on dry and wet surfaces better with its special canal structure and increases the stability of the vehicle.



- Computer designed block array. Minimised road / pattern noise, high driving comfort



- Fast and effective water discharge with three circular canals



■ ALL SIZES

235/65 R17 H/T RF	108V
215/60 R17 H/T	96V
225/60 R18 H/T	100H
235/60 R17 H/T	102V
235/60 R18 H/T RF	107V
245/60 R18 H/T	105H
255/60 R17 H/T	106V ●●
255/60 R18 H/T RF	112V ●●

265/60 R18 H/T	110H ●●
265/60 R18 H/T	110V ●●
215/55 R18 H/T	95H
225/55 R19 H/T	99H
225/55 R18 H/T	98V
225/55 R17 H/T	97V
235/55 R17 H/T RF	103V
235/55 R18 H/T	100V

235/55 R19 H/T RF	105V
245/55 R19 H/T	103H
255/55 R18 H/T RF	109V ●●
255/55 R19 H/T RF	111V ●●
275/55 R19 H/T	111V ●●
235/50 R18 H/T RF	101V
255/50 R19 H/T RF	107V ●●
255/50 ZR19 RF RFT H/T	107W ●●

ST 450 H/T Incurro

265/50 ZR19 H/T RF	110W ●●
275/45 ZR19 H/T RF	108W ●●
275/45 ZR20 H/T RF	110W ●●
285/45 R19 H/T	107V ●●
275/40 ZR20 H/T RF	102W ●●
315/35 ZR20 RF*	
315/35 ZR20 RF RFT*	

RF: REINFORCED
RFT: RUN FLAT
*UNDER DEVELOPMENT



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



W 870 Incurro

Designed for high traction and grip performance on snowy and icy surfaces. Provides stability on dry roads with special compound. Unique pattern design enables ultimate handling and cornering performance. Reducing stopping distance on slippery surfaces.



TRACTION AND GRIP IN WINTER CONDITIONS

PATTERN PROPERTIES



- High performance on icy and wet surfaces with Z-shaped sipes



- Stability on stream driving routes with circumferential block on the center



- Low noise and high driving comfort with V-shaped grooves



- High brake safety with optimized block arrays and lateral channels



- High maneuverability and turning performance with reinforced block type





ALL SIZES

205/80 R16 RF	104T	235/65 R17 RF	108V
235/75 R15 RF	109T	245/65 R17 RF	111H
205/70 R15	96T	255/65 R17 RF	114H
215/70 R15	98H	265/65 R17 RF	116H
215/70 R16 RF	104H	215/60 R17 RF	100H
225/70 R16 RF	107H	225/60 R17 RF	103V
235/70 R16	106T	235/60 R17 RF	106H
245/70 R16 RF	111T	255/60 R17 RF	110V
255/70 R16	111T	225/60 R18 RF	104V
265/70 R16	112T	235/60 R18 RF	107H
215/65 R17	99H	245/60 R18 RF	105H
225/65 R17 RF	106H	255/60 R18 RF	112H

265/60 R18 RF	114H
235/55 R17 RF	103V
205/55 R19 RF	97H
215/55 R18	95H
225/55 R18 RF	102H
235/55 R18 RF	104H
255/55 R18 RF	109V
225/55 R19	99H
235/55 R19 RF	105V
245/55 R19	103H
255/55 R19 RF	111V
275/55 R19	111H

235/50 R18 RF	101V
235/50 R19 RF	103V
255/50 R19 RF	107V
255/50 RF19 RF RFT	107V
265/50 R20 RF	111H
245/50 R20	102V
225/45 R19 RF	96V
275/45 R20 RF	110V
285/45 R19 RF	111H
275/40 R20 RF	106V
315/35 R20 RF	110V
255/55 R18 RFT*	

275/40 R20 RFT*
275/40 R20 RFT*
315/35 R20*
315/35 R20 RFT*
RF: REINFORCED
RFT: RUN FLAT
*UNDER DEVELOPMENT

••

••

••

••



TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.





ST 850



ST 850
plus



ST 860





LIGHT TRUCK TIRES

ST 900



ST 950



ST 960



ST 970
UNDER DEVELOPMENT



ST 850 Provan

Designed for commercial light trucks, transporters and vans. Deep treads and straight ribs provide excellent handling in any kind of weather condition. Offer durability thanks to its special compound resistant to wear and cornering safety.



ULTIMATE PERFORMANCE AND LONG LIFE UNDER HEAVY LOAD

■ PATTERN PROPERTIES



- Z – shaped sipes on tread improve wet and dry handling /breaking .



- Circumferential tiny groove on shoulder block provides even wear.



- Computer simulated pitch frequency minimises road / pattern noise and improves comfort for quieter ride.



- Circumferential 3-wide grooves provide excellent water drainage and improve aquaplaning significantly.





■ ALL SIZES

195 R14 C	8PR	106/104R
195 R15 C	8PR	106/104R
225/70 R15 C	8PR	112/110R
225/70 R15 C	10PR	116/114R

ST 850 Provan



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 850 Provan Plus

Radial summer tire designed with high technology. Offers high-grip performance and wear resistance thanks to its special tread compound



ENJOY THE ROAD EVEN
UNDER HEAVY LOAD

■ PATTERN PROPERTIES



- Better grip and traction on wet or dry surfaces with Z shape tread design.



- Sperical formulized tread composition provides ultime grip on asphalt.



- Computer designed block array.
Minimises road/pattern noise, high driving confort



- Circumferential 3-channel provides excellent water discharge.





■ ALL SIZES

5.00 R12 C	8PR	83/81P
155 R12 C	8PR	88/86N
155 R13 C	6PR	85/83N
185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
185 R15 C	8PR	103/102R
175/75 R16 C	8PR	101/99R
185/75 R16 C	8PR	104/102R
195/75 R16 C	8PR	107/105R

205/75 R16 C	8PR	110/108R
205/75 R16 C	10PR	113/111R
215/75 R16 C	8PR	113/111R
215/75 R16 C	10PR	116/114R
225/75 R16 C	8PR	118/116R
165/70 R14 C	6PR	89/87R
195/70 R15 C	8PR	104/102R
205/70 R15 C	8PR	106/104R
215/70 R15 C	8PR	109/107S

ST 850 Provan Plus

225/70 R15 C	8PR	112/110R
225/70 R15 C	10PR	116/114R
205/65 R15 C	8PR	102/100T
205/65 R16 C	8PR	107/105T
215/65 R16 C	8PR	109/107R
225/65 R16 C	8PR	112/110R
235/65 R16 C	8PR	115/113R



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 860 Provan

Safe handling in all kind of situations, even under heavy loads. Wide contact area increases stability and increase driving performance. Offers excellent mileage, rolling resistance and safety in wet surfaces.



ULTIMATE PERFORMANCE IN SUMMER

■ PATTERN PROPERTIES



- Better grip and traction on wet or dry surfaces with Z shape tread design.



- Spherical formulated tread composition provides ultimate grip on asphalt.



- Computer designed block array. Minimises road/pattern noise, high driving comfort



- Circumferential 3-channel provides excellent water discharge.





■ ALL SIZES

205/75 R16 C	8PR	110/108R
215/75 R16 C	8PR	113/111R
215/75 R16 C	10PR	116/114R
225/70 R15 C	8PR	112/110R
195/65 R16 C	8PR	104/102T
205/65 R16 C	8PR	107/105T
215/65 R15 C	6PR	104/102T
215/65 R16 C	8PR	109/107R
235/65 R16 C	8PR	115/113R
235/65 R16 C	12PR	121/119R
285/65 R16 C	10PR	128N
195/60 R16 C	6PR	99/97T



ST 860 Provan

■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 900 Proterra

Interlocking tread blocks offers durability. Perform high performance on dry surfaces. High wear resistance against wear with special shoulder structure. Multi-angle sipes offer all-season traction on every kind of road.



MAXIMUM PERFORMANCE DURING FOUR SEASONS

PATTERN PROPERTIES



- It is a splendid four-season tire, providing high handling performance and short brake distance on icy and wet surfaces with wave-shaped tread.



- With ultimate rubber repletion rate and special tread mixture, great wear performance on dry surfaces and high elasticity and grip performance in low temperatures



- Comuter simulated pitch frequency minimizes road / pattern noise improving comfort for quieter ride.



- Ultimate water discharge with circular 3-channel structure



- With special shoulder structure, high resistance against irregular wear





■ ALL SIZES

155 R12 C	8PR	88/86N	195/70 R15 C	8PR	104/102R
155 R13 C	8PR	90/89R	205/70 R15 C	8PR	106/104R
185 R14 C	8PR	102/100R	215/70 R15 C	8PR	109/107R
195 R14 C	8PR	106/104R	225/70 R15 C	8PR	112/110R
185/75 R16 C	8PR	104/102R	205/65 R15 C	8PR	102/100T
195/75 R16 C	8PR	107/105R	205/65 R16 C	8PR	107/105T
205/75 R16 C	8PR	110/108R	215/65 R16 C	8PR	109/107R
215/75 R16 C	8PR	113/111R	225/65 R16 C	8PR	112/110R
225/75 R16 C	8PR	118/116R	235/65 R16 C	8PR	115/113R

ST 900 Proterra



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 950 Prowin

Designed to overcome winter challenges. Offers excellent traction in difficult conditions thanks to its V shaped special tread pattern design.



DON'T WORRY ABOUT LOAD IN WINTER

■ PATTERN PROPERTIES



- Optimised shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



- Multi sipes improve handling and braking performance on snow and ice.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for quieter ride.



- Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



- Wide circumferential and lateral grooves provide exceptional water drainage and boost aquaplaning performance.



- Sharp edges on shoulder improve cornering.



■ ALL SIZES

155 R12 C	8PR	88/86N	195/70 R15 C	8PR	104/102R
155 R13 C	6PR	85/83N	205/70 R15 C	8PR	106/104R
185 R14 C	8PR	102/100R	215/70 R15 C	8PR	109/107R
195 R14 C	8PR	106/104R	225/70 R15 C	8PR	112/110R
175/75 R16 C	8PR	101/99R	205/65 R15 C	8PR	102/100T
185/75 R16 C	8PR	104/102R	205/65 R16 C	8PR	107/105T
195/75 R16 C	8PR	107/105R	215/65 R16 C	8PR	109/107R
205/75 R16 C	8PR	110/108R	225/65 R16 C	8PR	112/110R
215/75 R16 C	8PR	113/111R	235/65 R16 C	8PR	115/113R
225/75 R16 C	8PR	118/116R	195/60 R16 C	6PR	99/97T

ST 950 Prowin



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



ST 960 Prowin

Unique tread design with wavy sipes enables high grip performance on icy surfaces. Offers safety and durability



TIRES FOR INCREASING THE SAFETY OF LIGHTTRUCKS
DRIVING ON WET, SNOW OR ICE COVERED ROADWAYS.

PATTERN PROPERTIES



- Optimised shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



- Multi sipes and block type tread pattern improve grip and breaking performance on snow and ice.



- Computer simulated pitch frequency minimizes road/ pattern noise improving comfort for quieter ride.



- Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



- Wide groovers provide exceptional water drainage and boost aquaplaning performance.





■ ALL SIZES

155 R12 C	8PR	88/86N	205/70 R15 C	8PR	106/104R
155 R13 C	6PR	85/83N	225/70 R15 C	8PR	112/110R
185 R14 C	8PR	102/100R	215/65 R15 C	6PR	104/102T
195 R14 C	8PR	106/104R	195/65 R16 C	8PR	104/102T
185/75 R16 C	8PR	104/102R	205/65 R16 C	8PR	107/105T
195/75 R16 C	8PR	107/105R	215/65 R16 C	8PR	109/107R
205/75 R16 C	10PR	113/111R	225/65 R16 C	8PR	112/110R
215/75 R16 C	10PR	116/114R	235/65 R16 C	12PR	121/119R
225/75 R16 C	8PR	118/116R	285/65 R16 C	10PR	128 N
195/70 R15 C	8PR	104/102R	195/60 R16 C	6PR	99/97T

ST 960 Prowin



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and lower
rate of tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.



ST 970 Prowin

Unique pattern design with multidirectional wavy sipes and tread compound delivers exceptional performance in winter conditions and on the wet roads. 3PMSF and M+S markings on that tire ensure better grip and braking on snowy roads. Three circumferential grooves offer effective discharge of water and reduce aquaplaning.



MORE SAFETY, MORE MOBILITY IN WINTER CONDITIONS

PATTERN PROPERTIES



- Optimised shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



- Multi sipes and block type tread pattern improve grip and braking performance on snow and ice.



- Computer simulated pitch frequency minimizes road/ pattern noise improving comfort for quieter ride.



- Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



- Wide grooves provide exceptional water drainage and boost aquaplaning performance.





■ UNDER DEVELOPMENT SIZES

215/75 R16 C
235/65 R16 C

ST 970 Prowin



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and lower
rate of tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.



ST 330 TOLERO

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/80 R12	77	T	412	190	35
145/70 R12	69	T	325	190	36
155/70 R12	73	T	365	190	36
165/70 R12	77	T	412	190	36
175/70 R12	80	T	450	190	36
155/80 R13	79	T	437	190	35
165/80 R13	83	T	487	190	35
165/80 R13 RF	87	R	545	170	41
145/70 R13	71	T	345	190	36
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
165/70 R13 RF	83	T	487	190	42
175/70 R13	82	T	475	190	36
185/70 R13	86	T	530	190	36
155/65 R13	73	T	365	190	36
165/65 R13	77	T	412	190	36
175/65 R13	80	T	450	190	36
175/80 R14	88	T	560	190	35
165/70 R14	81	T	462	190	36
165/70 R14 RF	85	R	515	170	42
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
195/70 R14	91	T	615	190	36
155/65 R14	75	T	387	190	36
165/65 R14	79	T	437	190	36
175/65 R14	82	T	475	190	36
175/65 R14	86	T	530	190	42
185/65 R14	86	T	530	190	36
195/65 R14	89	H	580	210	36
165/60 R14	75	T	387	190	36
165/80 R15	87	T	545	190	35
195/70 R15 RF	97	T	730	190	42
175/65 R15	84	T	500	190	36
185/65 R15	88	T	560	190	36
195/65 R15 RF	95	T	690	190	42
195/65 R15	91	T	615	190	36

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4,50B	4,00B, 5,00B	156	554	F	C	69	2
4,50B	3,50B, 4,00B, 5,00B	145	512	F	C	69	2
4,50B	4,00B, 5,00B	156	526	F	C	69	2
5,00B	4,00B, 4,50B, 5,50B	169	539	F	C	69	2
5,00B	4,50B, 5,50B, 6,00B	177	555	E	C	69	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	156	580	F	C	69	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	166	595	E	C	69	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	166	595	E	C	69	2
4,50B, 4½J	3,50B, 3½J, 4,00B, 4J, 5,00B, 5J	146	539	F	C	69	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	155	554	F	C	69	2
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	168	565	F	C	69	2
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	168	565	E	C	69	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	177	582	E	C	69	2
5,50B, 5½J	4,50B, 4½J, 5,00B, 5J, 6,00B, 6J	189	592	E	C	69	2
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	154	534	F	C	69	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	170	550	F	C	69	2
5,00B, 5J	5,50B, 5½J, 6,00B, 6J	175	560	E	C	69	2
5J	4½J, 5½J, 6J	177	637	E	C	69	2
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	168	590	E	C	69	2
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	168	590	E	C	69	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	605	E	C	69	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	605	E	C	69	2
5½J	4½J, 5J, 6J	193	618	E	C	69	2
6J	5J, 5½J, 6½J	201	630	E	C	69	2
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	155	561	F	C	69	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6J	170	577	E	C	69	2
5,00B, 5J	5,50B, 5½J, 6J	174	586	E	C	69	2
5,00B, 5J	5,50B, 5½J, 6J	174	586	E	C	69	2
5½J	5J, 6J, 6½J	189	602	E	C	69	2
6J	5½J, 6½J, 7J	200	613	E	C	69	2
5,00B, 5J	4½J, 5½J, 6J	169	558	F	C	69	2
4½J	4J, 5J, 5½J	165	646	E	C	69	2
6J	5J, 5½J, 6½J	203	658	C	C	69	2
5J	5½J, 6J	175	610	E	C	69	2
5½J	5J, 6J, 6½J	189	627	E	C	69	2
6J	5½J, 6½J, 7J	200	641	E	C	69	2
6J	5½J, 6½J, 7J	201	641	E	C	69	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST 532 NOVARO

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/60 R13	77	H	412	210	36
175/70 R13	82	T	475	190	36
175/70 R13	82	H	475	210	36
185/70 R14	88	H	560	210	36
175/70 R14	84	H	500	210	36
175/70 R14 RF	88	H	560	210	42
175/65 R14	82	H	475	210	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	H	530	210	36
185/60 R14	82	H	475	210	36
195/60 R14	86	H	530	210	36
185/60 R14	82	H	475	210	36
195/60 R14	86	H	530	210	36
175/65 R15	84	H	500	210	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	H	615	210	36
195/65 R15	91	V	615	240	36
195/65 R15 RF	95	H	690	210	42
205/65 R15	94	H	670	210	36
205/65 R15	94	V	670	240	36
205/65 R15 RF	99	H	775	210	42
215/65 R15	96	V	710	240	36
185/60 R15	84	H	500	210	36
185/60 R15 RF	88	H	560	210	42
195/60 R15	88	H	560	210	36
195/60 R15	88	V	560	240	36
205/60 R15	91	H	615	210	36
205/60 R15	91	V	615	240	36
185/55 R15	82	V	475	240	36
195/55 R15	85	V	515	240	36
205/55 R15	88	V	560	240	36
195/50 R15*	82	V	475	240	36
205/50 R15*	86	W	530	270	36
205/65 R16	95	H	690	210	36
215/65 R16	98	H	750	210	36
215/65 R16	98	V	750	240	36
205/60 R16	92	H	630	210	36
205/60 R16	92	V	630	240	36
195/55 R16	87	V	545	240	36
205/55 R16	91	H	615	210	36
205/55 R16	91	V	615	240	36
215/55 R16	93	H	650	210	36
215/55 R16	93	V	650	240	36
225/55 ZR16	95	W	690	270	36
205/50 ZR16*	87	W	545	270	36
225/55 ZR17*	97	W	730	270	36
205/50 ZR17 RF*	93	W	650	270	42
225/50 ZR17 RF*	98	W	750	270	42
215/45 ZR17 RF*	91	W	615	270	42
225/45 ZR17 RF*	94	W	670	270	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5J	5.00B, 5.50B, 5½J, 6.00B, 6J	174	541,5	E	B	70	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	179	578	E	B	70	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	179	578	E	B	70	2
5½J	4½J, 5J, 6J	189	616	E	B	70	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	605	E	B	70	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	605	E	B	70	2
5,00B, 5J	5,50B, 5½J, 6J	177	589	E	B	70	2
5,00B, 5J	5,50B, 5½J, 6J	177	589	E	B	70	2
5½J	5J, 6J, 6½J	190	600	E	B	70	2
5½J	5J, 6J, 6½J	189	582	E	B	70	2
6J	5½J, 6½J, 7J	200	593	E	B	71	2
5½J	5J, 6J, 6½J	189	582	E	B	70	2
6J	5½J, 6½J, 7J	200	593	E	B	71	2
5J	5½J, 6J	177	615	E	B	70	2
5½J	5J, 6J, 6½J	189	625	E	B	70	2
5½J	5J, 6J, 6½J	189	625	C	B	70	2
6J	5½J, 6½J, 7J	201	638	C	B	71	2
6J	5½J, 6½J, 7J	201	638	C	B	71	2
6J	5½J, 6½J, 7J	201	638	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	2
6½J	6J, 7J, 7½J	221	662	C	B	71	2
5½J	5J, 6J, 6½J	189	609	E	B	70	2
5½J	5J, 6J, 6½J	189	609	E	B	70	2
6J	5½J, 6½J, 7J	198	622	E	B	71	2
6J	5½J, 6½J, 7J	198	622	E	B	71	2
6J	5½J, 6½J, 7J, 7½J	209	630	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	209	630	C	B	71	2
6J	5J, 5½J, 6½J	192	592	E	B	70	2
6J	5½J, 6½J, 7J	197	598	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	216	609	C	B	71	2
6J	5½J, 6½J, 7J	195	581	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	211	589	E	B	71	2
6J	5½J, 6½J, 7J, 7½J	209	675	C	B	71	2
6½J	6J, 7J, 7½J	223	688	C	B	71	2
6½J	6J, 7J, 7½J	223	688	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	655	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	655	C	B	71	2
6J	5½J, 6½J, 7J	199	625	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	213	636	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	213	636	C	B	71	2
7J	6J, 6½J, 7½J	226	642	C	B	71	2
7J	6J, 6½J, 7½J	226	642	C	B	71	2
7J	6J, 6½J, 7½J, 8J	230	660	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	210	617	E	B	71	2
7J	6J, 6½J, 7½J, 8J	226	690	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	214	638	C	B	71	2
7J	6J, 6½J, 7½J, 8J	223	666	C	B	71	2
7J	7½J, 8J	206	632	C	B	71	2
7½J	7J, 8J, 8½J	225	642	C	B	71	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST 542 NATUREN

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
185/60 R14	82	H	475	210	36
185/55 R14*	80	H	450	210	36
185/65 R15	88	T	560	190	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	T	615	190	36
195/65 R15	91	H	615	210	36
195/65 R15	91	V	615	240	36
195/65 R15 RF	95	T	690	190	42
205/65 R15	94	H	670	210	36
185/60 R15	84	H	500	210	36
185/60 R15 RF	88	H	560	210	42
195/60 R15	88	H	560	210	36
185/55 R15*	82	V	475	240	36
195/55 R15*	85	H	515	210	36
195/50 R15*	82	H	475	210	36
205/60 R16	92	H	630	210	36
205/60 R16	92	V	630	240	36
215/60 R16	95	V	690	240	36
195/55 R16*	87	H	545	210	36
205/55 R16*	91	H	615	210	36
195/50 R16 RF*	88	V	560	240	42

*Sizes with rim guard

ST 552 NOVARO

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70 R14*	84	H	500	210	36
175/65 R14	82	H	475	210	36
185/65 R14	86	H	530	210	36
195/65 R15 RF	95	H	690	210	42
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15*	91	H	615	210	36
185/60 R15*	84	H	500	210	36
185/60 R15 RF	88	H	560	210	42
195/60 R15*	88	H	560	210	36
195/55 R16*	87	H	545	210	36
205/55 R16*	91	H	615	210	36
195/50 R16*	84	H	500	210	36

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	599,5	C	C	69	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	599,5	C	C	69	2
5½J	4½J, 5J, 6J	192	613	C	C	69	2
5,00B, 5J	5,50B, 5½J, 6J	179	582	C	C	69	2
5,00B, 5J	5,50B, 5½J, 6J	179	582	C	C	69	2
5½J	5J, 6J, 6½J	190	596	C	C	69	2
5½J	5J, 6J, 6½J	186	574	C	C	69	2
6J	5J, 5½J, 6½J	193	556	C	C	69	2
5½J	5J, 6J, 6½J	190	620	C	C	69	2
5½J	5J, 6J, 6½J	190	620	C	C	69	2
5½J	5J, 6J, 6½J	190	620	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	C	70	2
6J	5½J, 6½J, 7J, 7½J	206	646	C	B	70	2
5½J	5J, 6J, 6½J	184	603,5	C	C	69	2
5½J	5J, 6J, 6½J	184	603,5	C	C	69	2
6J	5½J, 6½J, 7J	201	615	C	B	69	2
6J	5J, 5½J, 6½J	193	582	C	C	69	2
6J	5½J, 6½J, 7J	200	593	C	B	69	2
6J	5½J, 6½J, 7J	200	573	C	B	69	2
6J	5½J, 6½J, 7J, 7½J	204	650	C	B	70	2
6J	5½J, 6½J, 7J, 7½J	204	650	C	B	70	2
6½J	6J, 7J, 7½J	221	663	C	B	70	2
6J	5½J, 6½J, 7J	200	618	C	B	69	2
6½J	5½J, 6J, 7J, 7½J	214	632	C	B	70	2
6J	5½J, 6½J, 7J	200	598	C	B	69	2



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	602	E	B	70	2
5,00B, 5J	5,50B, 5½J, 6J	177	584	E	B	70	2
5½J	5J, 6J, 6½J	193	596	E	B	70	2
6J	5½J, 6½J, 7J	201	635	E	B	71	2
5½J	5J, 6J, 6½J	190	623	E	B	70	2
5½J	5J, 6J, 6½J	190	623	E	B	70	2
6J	5½J, 6½J, 7J	201	635	E	B	71	2
5½J	5J, 6J, 6½J	189	603	E	B	70	2
5½J	5J, 6J, 6½J	189	603	E	B	70	2
6J	5½J, 6½J, 7J	200	613	E	B	71	2
6J	5½J, 6½J, 7J	197	621	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	E	B	71	2
6J	5½J, 6½J, 7J	198	602	E	B	71	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST 562 NATUREN

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
165/80 R13	83	T	487	190	35
175/70 R13	82	T	475	190	36
185/60 R13	80	H	450	210	36
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
185/65 R15	88	T	560	190	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	T	630	190	42
195/65 R15*	91	T	615	190	36
195/65 R15	91	H	615	210	36
195/65 R15 RF	95	T	690	190	42
205/65 R15	94	H	670	210	36
205/65 R15	94	V	670	240	36
185/60 R15	84	H	500	210	36
185/60 R15 RF	88	T	560	190	42
195/60 R15	88	H	560	210	36
205/60 R16	92	H	630	210	36
205/60 R16	92	V	630	240	36
195/55 R16*	87	H	545	210	36
205/55 R16*	91	H	615	210	36
205/55 R16	91	V	615	240	36
215/55 R16*	93	V	650	240	36
215/50 R17*	91	V	615	240	36
225/45 R17 RF*	94	V	670	240	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	167	595	F	C	70	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	179,2	586,3	F	C	70	2
5,50B, 5½J	5,00B 5J 5,50B 5½J 6,00B 6J 6½J	177,3	552,9	F	C	70	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177,8	606,1	F	C	70	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177,4	606,3	F	C	70	2
5,00B, 5J	5,50B, 5½J, 6J	171,6	588,2	F	C	70	2
5,00B, 5J	5,50B, 5½J, 6J	171,6	588,2	F	C	70	2
5½J	5J, 6J, 6½J	192,8	596,8	F	C	70	2
5½J	5J, 6J, 6½J	191,7	622,2	F	C	70	2
5½J	5J, 6J, 6½J	190,9	623,5	F	C	70	2
5½J	5J, 6J, 6½J	190,7	623,2	F	C	70	2
6J	5½J, 6½J, 7J	203	636	F	C	70	2
6J	5½J, 6½J, 7J	203	636	F	C	70	2
6J	5½J, 6½J, 7J	203,7	635,8	F	C	70	2
6J	5½J, 6½J, 7J, 7½J	210,5	655	F	B	71	2
6J	5½J, 6½J, 7J, 7½J	201,4	655	F	B	71	2
5½J	5J, 6J, 6½J	180,7	599	F	C	70	2
5½J	5J, 6J, 6½J	180,5	599,2	F	C	70	2
6J	5½J, 6½J, 7J	199,1	618,1	F	C	70	2
6J	5½J, 6½J, 7J, 7½J	207,6	655	F	B	71	2
6J	5½J, 6½J, 7J, 7½J	206,6	655	E	B	71	2
6J	5½J, 6½J, 7J	192,8	624,5	E	C	70	2
6½J	5½J, 6J, 7J, 7½J	204	632	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	204	632	E	B	71	2
7J	6J, 6½J, 7½J	224	650	E	B	71	2
7J	6 J, 6½ J, 7½ J	215,5	649,3	E	B	71	2
7½J	7J, 8J, 8½J	222	636	E	B	72	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST 730 ULTRASPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/60 R13*	80	H	450	210	36
185/60 R13*	80	V	450	240	36
185/55 R14*	80	H	450	210	36
185/55 R14*	80	V	450	240	36
195/45 R14*	77	V	412	240	36
185/55 R15*	82	H	475	210	36
185/55 R15*	82	V	475	240	36
195/55 R15*	85	V	515	240	36
205/55 R15*	88	V	560	240	36
195/50 R15*	82	V	475	240	36
205/50 ZR15*	86	W	530	270	36
195/45 R15*	78	V	425	240	36
205/45 R15*	81	V	462	240	36
195/55 R16*	87	V	545	240	36
205/55 R16*	91	V	615	240	36
205/55 ZR16 RF*	94	W	670	270	42
215/55 ZR16 RF*	97	W	730	270	42
225/55 R16*	95	V	690	240	36
195/50 R16*	84	V	500	240	36
205/50 ZR16 RF*	91	W	615	270	42
225/50 ZR16 RF*	96	W	710	270	42
195/45 R16*	80	V	450	240	36
205/45 ZR16 RF*	87	W	545	270	42
205/40 ZR16 RF*	83	W	487	270	42
215/40 ZR16 RF*	86	W	530	270	42
225/40 ZR16*	85	W	515	270	36
225/55 ZR17*	97	W	730	270	36
205/50 ZR17 RF*	93	W	650	270	42
215/50 ZR17*	91	W	615	270	36
225/50 ZR17 RF*	98	W	750	270	42
205/45 ZR17 RF*	88	W	560	270	42
215/45 ZR17 RF*	91	W	615	270	42
225/45 ZR17 RF*	94	W	670	270	42
245/45 ZR17 RF*	99	W	775	270	42
205/40 ZR17 RF*	84	W	500	270	42
215/40 ZR17 RF*	87	W	545	270	42
235/40 ZR17 RF*	94	W	670	270	42
245/40 ZR17 RF*	95	W	690	270	42
225/45 ZR18 RF*	95	W	690	270	42
245/45 ZR18 RF*	100	W	800	270	42
215/40 ZR18 RF*	89	W	580	270	42
225/40 ZR18 RF*	92	W	630	270	42
235/40 ZR18 RF*	95	W	690	270	42
245/40 ZR18 RF*	93	W	650	270	36
215/35 ZR18 RF*	84	W	500	270	42
225/35 ZR18 RF*	87	W	545	270	42
225/40 ZR19*	89	W	580	270	36
245/40 ZR19 RF*	98	W	750	270	42
255/40 ZR19 RF*	100	W	800	270	42
225/35 ZR19 RF*	88	W	560	270	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,50B, 5½J	5,00B, 5J, 6,00B, 6J, 6½J	188	554	E	C	70	2
5,50B, 5½J	5,00B, 5J, 6,00B, 6J, 6½J	188	554	E	C	70	2
6J	5J, 5½J, 6½J	194	562	E	C	70	2
6J	5J, 5½J, 6½J	194	562	E	C	70	2
6½J	6J, 7J, 7½J	198	533	E	C	71	2
6J	5J, 5½J, 6½J	194	591	E	C	70	2
6J	5J, 5½J, 6½J	194	591	E	C	70	2
6J	5½J, 6½J, 7J	201	599	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	614	E	C	71	2
6J	5½J, 6½J, 7J	197	581	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	590	E	C	71	2
6½J	6J, 7J, 7½J	196	562	E	C	71	2
7J	6½J, 7½J	207	568	E	C	71	2
6J	5½J, 6½J, 7J	199	625	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	211	640	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	211	640	C	C	71	2
7J	6J, 6½J, 7½J	225	647	C	C	71	2
7J	6J, 6½J, 7½J, 8J	228	658	C	C	71	2
6J	5½J, 6½J, 7J	197	611	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	617	E	C	71	2
7J	6J, 6½J, 7½J, 8J	230	636	C	C	71	2
6½J	6J, 7J, 7½J	196	588	E	C	71	2
7J	6½J, 7½J	205	596	E	C	71	2
7½J	7J, 8J	204	576	E	C	71	2
7½J	7J, 8J, 8½J	204	582	E	C	71	2
8J	7½J, 8½J, 9J	230	588	E	C	71	2
7J	6J, 6½J, 7½J, 8J	227	685	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	644	E	C	71	2
7J	6J, 6½J, 7½J	217	656	E	C	71	2
7J	6J, 6½J, 7½J, 8J	228	665	C	C	71	2
7J	6½J, 7½J	204	624	E	C	71	2
7J	7½J, 8J	210	636	E	C	71	2
7½J	7J, 8J, 8½J	227	638	C	C	71	2
8J	7½J, 8½J, 9J	235	655	C	B	71	2
7½J	7J, 8J	210	601	E	C	71	2
7½J	7J, 8J, 8½J	208	609	E	C	71	2
8½J	8J, 9J, 9½J	236	627	C	B	71	2
8½J	8J, 9J, 9½J	241	635	C	B	71	2
7½J	7J, 8J, 8½J	225	666	C	C	71	2
8J	7½J, 8½J, 9J	235	683	C	B	71	2
7½J	7J, 8J, 8½J	210	638	E	C	71	2
8J	7½J, 8½J, 9J	226	645	E	C	71	2
8½J	8J, 9J, 9½J	233	653	C	B	71	2
8½J	8J, 9J, 9½J	244	662	E	B	71	2
7½J	7J, 8J, 8½J	218	615	E	C	71	2
8J	7½J, 8½J, 9J	222	624	E	C	71	2
8J	7½J, 8½J, 9J	226	670	E	C	71	2
8½J	8J, 9J, 9½J	245	687	C	B	71	2
9J	8½J, 9½J, 10J	256	695	C	B	71	2
8J	7½J, 8½J, 9J	220	649	E	C	71	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST 740 ULTRASPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
205/55 R16*	91	V	615	240	36

*Sizes with rim guard

ST 750 ULTRASPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
205/55 R 16*	91	H	615	210	36
205/55 R 16*	91	V	615	240	36

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	5½,6J,7J,7½J	214	639	C	B	69	2



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	5½J, 6J, 7J, 7½J	214	638	C	B	70	2
6½J	5½J, 6J, 7J, 7½J	214	638	C	B	70	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



TECHNICAL DATA

ST 760 ULTRASPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/55 R14*	80	V	450	240	36
185/55 R15*	82	V	475	240	36
195/55 R15*	85	V	515	240	36
195/50 R15*	82	V	475	240	36
205/50 ZR15*	86	W	530	270	36
215/60 R16 RF	99	V	775	240	42
225/60 R16	98	V	750	240	36
235/60 ZR16	100	W	800	270	36
185/55 R16 RF*	87	H	545	210	42
195/55 R16 RF*	87	V	545	240	36
195/55 R16 RFT*	87	V	545	240	36
205/55 ZR16 RF*	94	W	670	270	42
205/55 R16 RFT*	91	V	615	240	36
215/55 ZR16 RF*	97	W	730	270	42
225/55 ZR16 RF*	99	W	775	270	42
195/50 R16*	84	V	500	240	36
205/50 ZR16 RF*	91	W	615	270	42
225/50 ZR16 RF*	96	W	710	270	42
195/45 R16 RF*	84	V	500	240	42
205/45 ZR16 RF*	87	W	545	270	42
215/45 R16 RF*	90	V	600	240	42
205/40 ZR16 RF*	83	W	487	270	42
215/40 ZR16 RF*	86	W	530	270	42
205/55 ZR17*	91	W	615	270	36
215/55 ZR17 RF*	98	W	750	270	42
225/55 ZR17 RF*	101	W	825	270	42
225/55 ZR17 RFT*	97	W	730	270	36
235/55 ZR17 RF*	103	W	875	270	42
205/50 ZR17 RF*	93	W	650	270	42
205/50 ZR17 RFT*	89	W	580	270	36
215/50 ZR17 RF*	95	W	690	270	42
225/50 ZR17 RF*	98	W	750	270	42
225/50 ZR17 RFT*	94	W	670	270	36
205/45 ZR17 RF*	88	W	560	270	42
215/45 ZR17 RF*	91	W	615	270	42
225/45 ZR17 RF*	94	W	670	270	42
225/45 ZR17 RFT*	91	W	615	270	36
235/45 ZR17 RF*	97	W	730	270	42
245/45 ZR17 RF*	99	W	775	270	42
205/40 ZR17 RF*	84	W	500	270	42
215/40 ZR17 RF*	87	W	545	270	42
235/40 ZR17 RF*	94	W	670	270	42
245/40 ZR17 RF*	95	W	690	270	42
245/35 ZR17*	87	W	545	270	36
235/55 ZR18 RF	104	W	900	270	42
235/50 ZR18 RF*	101	W	825	270	42
245/50 ZR18*	100	W	800	270	36
245/50 RF18 RFT*	100	W	800	270	36
215/45 ZR18 RF*	93	W	650	270	42
225/45 ZR18 RF*	95	W	690	270	42
225/45 ZR18 RFT*	91	W	615	270	36
235/45 ZR18 RF*	98	W	750	270	42
245/45 ZR18 RF*	100	W	800	270	42
245/45 ZR18 RFT*	96	W	710	270	36
255/45 ZR18 RF*	103	W	875	270	42
215/40 ZR18 RF*	89	W	580	270	42
225/40 ZR18 RF*	92	W	630	270	42
235/40 ZR18 RF*	95	W	690	270	42
245/40 RF18*	93	W	650	270	36
245/40 RF18 RFT*	93	W	650	270	36
255/40 ZR18*	95	W	690	270	36
215/35 ZR18 RF*	84	W	500	270	42
225/35 ZR18 RF*	87	W	545	270	42
245/35 ZR18 RF*	92	W	630	270	42
255/35 ZR18 RF*	94	W	670	270	42
265/35 ZR18 RF*	97	W	730	270	42
275/35 ZR18 RF*	99	W	775	270	42
225/45 ZR19 RF*	96	W	710	270	42
235/45 ZR19 RF	99	W	775	270	42
245/45 ZR19 RF*	102	W	850	270	42
245/45 ZR19 RFT*	98	W	750	270	36
255/45 ZR19 RF*	104	Y	900	300	42
225/40 ZR19 RF*	93	W	650	270	42
245/40 ZR19 RF*	98	W	750	270	42
245/40 ZR19 RFT*	94	W	670	270	36
255/40 ZR19 RF*	100	W	800	270	42
215/35 ZR19 RF*	85	W	515	270	42
235/35 ZR19 RF*	91	W	615	270	42
245/35 ZR19 RF*	93	W	650	270	42
255/35 ZR19 RF*	96	W	710	270	42
255/35 ZR19 RFT*	92	W	630	270	36
275/35 ZR19 RF*	100	W	800	270	42
245/40 ZR20 RF*	99	W	775	270	42
255/40 ZR20 RF*	101	W	825	270	42
245/35 ZR20 RF*	95	W	690	270	42
255/35 ZR20 RF*	97	W	730	270	42

*Sizes with rim guard

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5J, 5½J, 6½J	193	563	E	C	70	2
6J	5J, 5½J, 6½J	194	585	C	C	70	2
6J	5½J, 6½J, 7J	200	595	C	C	71	2
6J	5½J, 6½J, 7J	196	582	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	587	C	C	71	2
6½J	6J, 7J, 7½J	225	665	C	C	71	2
6½J	6J, 7J, 7½J, 8J	233	677	C	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	690	C	C	71	2
6J	5J, 5½J, 6½J	191	610	E	C	70	2
6J	5½J, 6½J, 7J	201	620	C	C	71	2
6J	5½J, 6½J, 7J	201	620	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	635	E	B	71	2
7J	6J, 6½J, 7½J	228	642	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	654	C	C	71	2
6J	5½J, 6½J, 7J	195	608	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	612	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	632	C	C	71	2
6½J	6J, 7J, 7½J	195	582	C	C	71	2
7J	6½J, 7½J	206	596	C	C	71	2
7J	7½J, 8J	215	600	C	B	71	2
7½J	7J, 8J	212	570	C	C	72	2
7½J	7J, 8J, 8½J	218	580	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	658	C	C	71	2
7J	6J, 6½J, 7½J	226	668	C	C	71	2
7J	6J, 6½J, 7½J, 8J	228	688	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	680	E	B	70	2
7½J	6½J, 7J, 8J, 8½J	246	692	C	C	72	2
6½J	5½J, 6J, 7J, 7½J	214	638	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	640	E	C	71	2
7J	6J, 6½J, 7½J	226	648	C	B	71	2
7J	6J, 6½J, 7½J, 8J	233	658	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	658	E	C	71	2
7J	6½J, 7½J	206	623	C	C	71	2
7J	7½J, 8J	211	627	C	C	71	2
7½J	7J, 8J, 8½J	222	642	C	B	71	2
7½J	7J, 8J, 8½J	226	636	E	B	71	2
8J	7½J, 8½J, 9J	236	650	C	B	72	2
8J	7½J, 8½J, 9J	243	652	C	C	72	2
7½J	7J, 8J	216	601	C	C	71	2
7½J	7J, 8J, 8½J	218	608	C	C	71	2
8½J	8J, 9J, 9½J	241	622	C	C	72	2
8½J	8J, 9J, 9½J	246	635	C	C	71	2
8½J	8J, 9J, 9½J	243	608	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	246	718	C	B	72	2
7½J	6½J, 7J, 8J, 8½J	245	693	C	B	72	2
7½J	7J, 8J, 8½J	245	708	E	B	71	2
7½J	7J, 8J, 8½J	245	708	E	B	71	2
7J	7½J, 8J	213	655	C	C	71	2
7½J	7J, 8J, 8½J	225	659	C	B	71	2
7½J	7J, 8J, 8½J	226	660	E	B	71	2
8J	7½J, 8½J, 9J	236	669	C	B	72	2
8J	7½J, 8½J, 9J	243	677	C	B	72	2
8J	7½J, 8½J, 9J	243	677	E	B	72	2
8½J	8J, 9J, 9½J	257	692	C	B	72	2
7½J	7J, 8J, 8½J	217	633	C	C	71	2
8J	7½J, 8½J, 9J	230	637	C	C	72	2
8½J	8J, 9J, 9½J	241	645	C	C	72	2
8½J	8J, 9J, 9½J	244	660	C	B	71	2
8½J	8J, 9J, 9½J	245	662	E	B	72	2
9J	8½J, 9½J, 10J	257	660	E	B	72	2
7½J	7J, 8J, 8½J	216	613	E	B	71	2
8J	7½J, 8½J, 9J	227	625	C	C	72	2
8½J	8J, 9J, 9½J	242	636	C	B	71	2
9J	8½J, 9½J, 10J	253	639	C	C	72	2
9½J	9J, 10J, 10½J	270	647	C	B	72	2
9½J	9J, 10J, 10½J, 11J	268	656	C	C	73	2
7½J	7J, 8J, 8½J	225	693	C	C	72	2
8J	7½J, 8½J, 9J	238	694	E	B	71	2
8J	7½J, 8½J, 9J	243	703	C	B	72	2
8J	7½J, 8½J, 9J	243	703	E	B	72	2
8½J	8J, 9J, 9½J	257	718	C	B	72	2
8J	7½J, 8½J, 9J	230	663	C	C	72	2
8½J	8J, 9J, 9½J	248	683	C	C	71	2
8½J	8J, 9J, 9½J	248	682	E	C	71	2
9J	8½J, 9½J, 10J	258	692	C	B	72	2
7½J	7J, 8J, 8½J	217	640	E	B	71	2
8J	8½J, 9J, 9½J	236	654	C	B	72	2
8½J	8J, 9J, 9½J	241	662	C	B	72	2
9J	8½J, 9½J, 10J	253	665	C	C	72	2
9J	8½J, 9½J, 10J	254	664	E	B	71	2
9½J	9J, 10J, 10½J, 11J	268	682	C	B	72	2
8½J	8J, 9J, 9½J	244	710	E	B	72	2
9J	8½J, 9½J, 10J	257	711	E	B	72	2
8½J	8J, 8½J, 9J, 9½J	243	689	C	B	71	2
9J	8½J, 9½J, 10J	254	692	E	B	72	2

W 810 ICEGRIPPER

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/80 R13	79	T	437	190	35
165/80 R13	83	T	487	190	35
145/70 R13	71	T	345	190	36
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
165/70 R13 RF	83	T	487	190	42
175/70 R13	82	T	475	190	36
185/70 R13	86	T	530	190	36
155/65 R13	73	T	365	190	36
165/65 R13	77	T	412	190	36
175/65 R13	80	T	450	190	36
175/80 R14	88	T	560	190	35
165/70 R14	81	T	462	190	36
165/70 R14 RF	85	R	515	170	42
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
195/70 R14	91	T	615	190	36
155/65 R14	75	T	387	190	36
165/65 R14	79	T	437	190	36
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
165/60 R14	75	T	387	190	36
195/70 R15 RF	97	T	730	190	42
175/65 R15	84	T	500	190	36

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	156	580	F	E	71	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	168	595	E	E	71	2
4,50B, 4½J	3,50B, 3½J, 4,00B, 4J, 5,00B, 5J	144	537	F	E	71	2
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	152	554	F	E	71	2
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	167	566	E	E	71	2
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	167	566	E	E	71	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	177	580	E	E	71	2
5,50B, 5½J	4,50B, 4½J, 5,00B, 5J, 6,00B, 6J	193	593	E	E	71	2
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	154	536	F	E	71	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	170	553	E	E	71	2
5,00B, 5J	5,50B, 5½J, 6,00B, 6J	175	560	E	E	71	2
5J	4½J, 5½J, 6J	177	636	E	E	71	2
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	169	590	E	E	71	2
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	169	590	E	E	71	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	606	E	E	71	2
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	606	E	E	71	2
5½J	4½J, 5J, 6J	191	618	E	E	71	2
6J	5J, 5½J, 6½J	201	635	E	E	71	2
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	155	562	F	E	71	2
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6J	172	575	E	E	71	2
5,00B, 5J	5,50B, 5½J, 6J	174	587	E	E	71	2
5,00B, 5J	5,50B, 5½J, 6J	174	587	E	E	71	2
5½J	5J, 6J, 6½J	189	602	E	E	71	2
5,00B, 5J	4½J, 5½J, 6J	168	560	E	E	71	2
6J	5J, 5½J, 6½J	203	659	E	E	71	2
5J	5½J, 6J	174	612	E	E	71	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



W 850 ICEGRIPPER

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/60 R14	82	H	475	210	36
195/60 R14	86	H	530	210	36
185/55 R14	80	H	450	210	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	H	615	210	36
195/65 R15 RF	95	H	690	210	42
205/65 R15	94	H	670	210	36
215/65 R15	96	H	710	210	36
185/60 R15	84	H	500	210	36
195/60 R15	88	H	560	210	36
205/60 R15	91	H	615	210	36
185/55 R15	82	H	475	210	36
195/55 R15	85	H	515	210	36
205/55 R15	88	V	560	240	36
205/55 R15 RF	92	V	630	240	42
195/50 R15 *	82	H	475	210	36
205/50 R15 *	86	H	530	210	36
205/65 R16	95	H	690	210	36
215/65 R16	98	H	750	210	36
215/65 R16 RF	102	T	850	190	42
205/60 R16	92	H	630	210	36
215/60 R16	95	H	690	210	36
225/60 R16	98	H	750	210	36
235/60 R16	100	H	800	210	36
185/55 R16 RF*	87	H	545	210	42
195/55 R16	87	H	545	210	36
205/55 R16	91	H	615	210	36
205/55 R16 RFT*	91	H	615	210	36
215/55 R16	93	H	650	210	36
225/55 R16	95	H	690	210	36
195/50 R16 *	84	H	500	210	36
205/50 R16*	87	H	545	210	36
205/50 R16 RF	91	H	615	210	42
225/50 R16 RF*	96	V	710	240	42
195/45 R16 RF*	85	H	515	210	42
205/45 R16 RF*	87	H	545	210	42
215/45 R16 RF*	90	V	600	240	42
205/55 R17*	91	H	615	210	36
215/55 R17 RF	98	V	750	240	42
225/55 R17	97	H	730	210	36
225/55 R17 RF	101	V	825	240	42
235/55 R17 RF*	103	V	875	240	42
205/50 R17 RF*	93	V	650	240	42
215/50 R17 RF*	91	H	615	210	36
225/50 R17 RF*	98	V	750	240	42
205/45 R17 RF*	88	H	560	210	42
215/45 R17 RF*	91	V	615	240	42
225/45 R17 RF*	94	V	670	240	42
235/45 R17 RF*	97	V	730	240	42
245/45 R17 RF*	99	V	775	240	42
245/40 R17 RF*	95	V	690	240	42
215/50 R18	92	V	630	240	36
245/50 R18 RF*	104	V	900	240	42
215/45 R18 RF*	93	V	650	240	42
225/45 R18 RF*	95	V	690	240	42
235/45 R18 RF*	98	V	750	240	42
245/45 R18 RF*	100	V	800	240	42
225/40 R18 RF*	92	V	630	240	42
235/40 R18 RF*	95	V	690	240	42
245/40 R18 RF*	97	V	730	240	42
235/50 R19 RF*	103	V	875	240	42
245/45 R19 RF*	102	V	850	240	42
245/40 R19 RF*	98	V	750	240	42
255/40 R19 RF*	100	V	800	240	42

*Sizes with rim guard

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5½J	5J, 6J, 6½J	189	581	E	C	71	2
6J	5½J, 6½J, 7J	201	592	E	C	71	2
6J	5J, 5½J, 6½J	192	564	E	C	71	2
5½J	5J, 6J, 6½J	190	627	E	C	71	2
5½J	5J, 6J, 6½J	190	627	E	C	71	2
6J	5½J, 6½J, 7J	201	640	E	C	71	2
6J	5½J, 6½J, 7J	201	640	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	207	652	E	C	71	2
6½J	6J, 7J, 7½J	221	661	E	C	71	2
5½J	5J, 6J, 6½J	189	608	E	C	71	2
6J	5½J, 6½J, 7J	198	622	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	208	631	E	C	71	2
6J	5J, 5½J, 6½J	191	592	E	C	71	2
6J	5½J, 6½J, 7J	195	604	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	610	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	610	E	C	71	2
6J	5½J, 6½J, 7J	196	583	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	590	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	675	E	C	71	2
6½J	6J, 7J, 7½J	221	686	E	C	71	2
6½J	6J, 7J, 7½J	221	690	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	657	E	C	71	2
6½J	6J, 7J, 7½J	221	667	E	C	71	2
6½J	6J, 7J, 7½J, 8J	228	680	E	C	71	2
7J	6½J, 7½J, 8J, 8½J	241	690	E	C	71	2
6J	5J, 5½J, 6½J	192	615	E	C	71	2
6J	5½J, 6½J, 7J	196	629	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	635	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	215	635	E	C	71	2
7J	6J, 6½J, 7½J	226	642	E	C	71	2
7J	6J, 6½J, 7½J, 8J	230	658	E	C	71	2
6J	5½J, 6½J, 7J	196	608	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	209	614	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	209	614	E	C	71	2
7J	6J, 6½J, 7½J, 8J	222	640	E	C	71	2
6½J	6J, 7J, 7½J	195	586	E	C	71	2
7J	6½J, 7J, 7½J	203	595	E	C	71	2
7J	7½J, 8J	211	604	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	209	659	E	C	71	2
7J	6J, 6½J, 7½J	221	674	E	C	71	2
7J	6J, 6½J, 7½J, 8J	228	688	E	C	71	2
7J	6J, 6½J, 7½J, 8J	228	688	E	C	71	2
7½J	6½J, 7J, 8J, 8½J	240	690	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	638	E	C	71	2
7J	6J, 6½J, 7½J	217	655	E	C	71	2
7J	6J, 6½J, 7½J, 8J	221	666	E	C	71	2
7J	6½J, 7½J	206	619	E	C	71	2
7J	7½J, 8J	206	633	E	C	71	2
7½J	7J, 8J, 8½J	223	642	E	C	71	2
8J	7½J, 8½J, 9J	230	648	E	C	71	2
8J	7½J, 8½J, 9J	243	661	E	C	71	2
8½J	8J, 9J, 9½J	244	632	E	C	71	2
7J	6J, 6½J, 7½J	217	674	E	C	71	2
7½J	7J, 8J, 8½J	246	710	C	C	71	2
7J	7½J, 8J	225	652	E	C	71	2
7½J	7J, 8J, 8½J	223	662	E	C	71	2
8J	7½J, 8½J, 9J	236	669	E	C	71	2
8J	7½J, 8½J, 9J	236	684	E	C	71	2
8J	7½J, 8½J, 9J	230	644	E	C	71	2
8½J	8J, 9J, 9½J	237	650	E	C	71	2
8½J	8J, 9J, 9½J	240	661	E	C	71	2
7½J	6½J, 7J, 8J, 8½J	237	727	C	C	71	2
8J	7½J, 8½J, 9J	241	708	C	C	71	2
8½J	8J, 9J, 9½J	244	684	E	C	71	2
9J	8½J, 9½J, 10J	262	689	C	C	72	2



ST 430 INCURRO A/S

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
235/75 R15	105	H	925	210	36
205/70 R15	96	H	710	210	36
215/70 R15	98	H	750	210	36
215/70 R16	100	H	800	210	36
225/70 R16 RF	107	T	975	190	42
235/70 R16	106	H	950	210	36
245/70 R16	107	H	975	210	36
255/70 R16	111	T	1090	190	36
265/70 R16	112	T	1120	190	36
215/65 R16	98	H	750	210	36
215/65 R16 RF	102	H	850	210	42
255/65 R16	109	H	1030	210	36
215/60 R16	95	H	690	210	36
235/60 R16	100	H	800	210	36
215/65 R17	99	H	775	210	36
225/65 R17	102	H	850	210	36
235/65 R17 RF	108	H	1000	210	42
245/65 R17 RF	111	H	1090	210	42
255/65 R17	110	H	1060	210	36
265/65 R17	112	H	1120	210	36
225/60 R17 RF	103	H	875	210	42

ST 440 INCURRO A/T

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
215/80 R15*	102	S	850	180	35
235/75 R15*	105	T	925	190	36
255/70 R15*	108	T	1000	190	36
265/70 R15*	112	T	1120	190	36
265/70 R15 RF	116	T	1250	190	42
215/65 R16*	98	T	750	190	36
205/80 R16 RF*	104	T	900	190	42
235/70 R16*	106	T	950	190	36
245/70 R16 RF*	111	T	1090	190	42
265/60 R18 RF*	114	T	1180	190	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	6J, 7J, 7½J, 8J	241	728	C	E	71	2
6J	5J, 5½J, 6½J, 7J	209	674	E	E	70	2
6½J	5½J, 6J, 7J	229	680	E	E	70	2
6½J	5½J, 6J, 7J	229	705	C	E	70	2
6½J	6J, 7J, 7½J	234	719	C	E	71	2
7J	6J, 6½J, 7½J, 8J	246	731	C	E	71	2
7J	6½J, 7½J, 8J	248	750	C	E	71	2
7½J	6½J, 7J, 8J, 8½J	260	764	C	E	72	2
8J	7J, 7½J, 8½J, 9J	272	778	C	E	72	2
6½J	6J, 7J, 7½J	224	689	E	E	70	2
6½J	6J, 7J, 7½J	224	689	C	E	70	2
7½J	7J, 8J, 8½J, 9J	264	734	C	E	72	2
6½J	6J, 7J, 7½J	222	662	E	E	70	2
7J	6½J, 7½J, 8J, 8½J	241	684	C	E	71	2
6½J	6J, 7J, 7½J	222	712	E	E	70	2
6½J	6J, 7J, 7½J, 8J	230	724	C	E	71	2
7J	6½J, 7½J, 8J, 8½J	240	739	C	E	71	2
7J	7½J, 8J, 8½J	247	748	C	E	71	2
7½J	7J, 8J, 8½J, 9J	263	761	C	E	72	2
8J	7½J, 8½J, 9J, 9½J	276	773	C	E	72	2
6½J	6J, 7J, 7½J, 8J	228	703	C	E	71	2



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5½J, 6½J, 7J	218	728	E	E	71	2
6½J	6J, 7J, 7½J, 8J	244	726	E	E	71	2
7½J	6½J, 7J, 8J, 8½J	271	732	E	E	72	2
8J	7J, 7½J, 8½J, 9J	273	746	E	E	72	2
8J	7J, 7½J, 8½J, 9J	273	746	E	E	73	2
6½J	6J, 7J, 7½J	228	678	E	E	71	2
5½J	5J, 6J, 6½J, 7J	209	727	E	E	71	2
7J	6J, 6½J, 7½J, 8J	241	731	E	E	71	2
7J	6½J, 7½J, 8J	248	750	E	E	71	2
8J	7½J, 8½J, 9J, 9½J	263	773	E	E	73	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST 450 INCURRO H/T

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
235/65 R17 RF	108	V	1000	240	42
215/60 R17*	96	V	710	240	36
235/60 R17*	102	V	850	240	36
255/60 R17*	106	V	950	240	36
225/60 R18*	100	H	800	210	36
235/60 R18 RF*	107	V	975	240	42
245/60 R18*	105	H	925	210	36
255/60 R18 RF*	112	V	1120	240	42
265/60 R18*	110	H	1060	210	36
265/60 R18*	110	V	1060	240	36
225/55 R17*	97	V	730	240	36
235/55 R17 RF*	103	V	875	240	42
215/55 R18*	95	H	690	210	36
225/55 R18*	98	V	750	240	36
235/55 R18*	100	V	800	240	36
255/55 R18 RF*	109	V	1030	240	42
225/55 R19*	99	H	775	210	36
235/55 R19 RF*	105	V	925	240	42
245/55 R19*	103	H	875	210	36
255/55 R19 RF*	111	V	1090	240	42
275/55 R19*	111	V	1090	240	36
235/50 R18 RF*	101	V	825	240	42
255/50 R19 RF*	107	V	975	240	42
255/50 ZR19 RFT*	107	W	975	270	42
265/50 ZR19 RF*	110	W	1060	270	42
275/45 ZR19 RF*	108	W	1000	270	42
285/45 R19*	107	V	975	240	36
275/45 ZR20 RF*	110	W	1060	270	42
275/40 ZR20*	102	W	850	270	36

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIEMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
7J	6½J, 7½J, 8J, 8½J	240	738	B	C	71	2
6½J	6J, 7J, 7½J	221	690	C	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	714	C	C	71	2
7½J	7J, 8J, 8½J, 9J	260	736	C	C	72	2
6½J	6J, 7J, 7½J, 8J	228	727	B	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	739	B	C	71	2
7J	7½J, 8J, 8½J	248	751	B	C	71	2
7½J	7J, 8J, 8½J, 9J	261	763	B	C	72	2
8J	7½J, 8½J, 9J, 9½J	272	775	B	C	72	2
8J	7½J, 8½J, 9J, 9½J	272	775	B	C	72	2
7J	6J, 6½J, 7½J, 8J	233	680	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	690	C	C	71	2
7J	6J, 6½J, 7½J	226	693	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	705	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	715	C	C	71	2
8J	7J, 7½J, 8½J, 9J	262	735	B	C	72	2
7J	6J, 6½J, 7½J, 8J	233	731	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	741	C	C	71	2
7½J	7J, 8J, 8½J	253	753	C	C	71	2
8J	7J, 7½J, 8½J, 9J	260	761	B	C	72	2
8½J	7½J, 8J, 9J, 9½J	283	783	B	C	72	2
7½J	6½J, 7J, 8J, 8½J	240	688	B	C	71	2
8J	7J, 7½J, 8½J, 9J	265	739	B	C	72	2
8J	7J, 7½J, 8½J, 9J	258	745	C	C	72	2
8½J	7½J, 8J, 9J, 9½J	277	749	B	C	72	2
9J	8½J, 9½J, 10J, 10½J	268	731	B	C	72	2
9½J	9J, 10J, 10½J	283	740	B	C	72	2
9J	8½J, 9½J, 10J, 10½J	270	758	B	C	72	2
9½J	9J, 10J, 10½J, 11J	273	729	B	C	72	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



W 870 INCURRO

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
235/75 R15 RF	109	T	1030	190	42
205/70 R15	96	T	710	190	42
215/70 R15	98	H	750	210	42
205/80 R16 RF	104	T	900	190	42
215/70 R16 RF	104	H	900	210	36
225/70 R16 RF	107	H	975	210	42
235/70 R16	106	T	950	190	42
245/70 R16	111	T	1090	190	42
255/70 R16	111	T	1090	190	42
265/70 R16	112	T	1120	190	36
215/65 R17	99	H	775	210	42
225/65 R17 RF	106	H	950	210	42
235/65 R17 RF	108	V	1000	240	36
245/65 R17 RF	111	H	1090	210	36
255/65 R17 RF	114	H	1180	210	42
265/65 R17 RF	116	H	1250	210	42
215/60 R17 RF	100	H	800	210	36
225/60 R17 RF	103	V	875	240	42
235/60 R17 RF	106	H	950	210	36
255/60 R17 RF	110	V	1060	240	42
235/55 R17 RF*	103	V	875	240	42
225/60 R18 RF	104	V	900	240	36
235/60 R18 RF	107	H	975	210	42
245/60 R18	105	H	925	210	42
255/60 R18 RF	112	H	1120	210	42
265/60 R18 RF*	114	H	1180	210	42
215/55 R18*	95	H	690	210	42
225/55 R18 RF*	102	H	850	210	42
235/55 R18 RF*	104	H	900	210	42
255/55 R18 RF*	109	V	1030	240	36
235/50 R18 RF*	101	V	825	240	42
225/55 R19*	99	H	775	210	42
235/55 R19 RF*	105	V	925	240	42
245/55 R19*	103	H	875	210	42
255/55 R19 RF*	111	V	1090	240	42
275/55 R19*	111	H	1090	210	42
235/50 R19 RF*	103	V	875	240	36
255/50 R19 RF*	107	V	975	240	36
255/50 R19 RFT*	107	V	975	240	42
225/45 R19 RF*	96	V	710	240	36
285/45 R19 RF*	111	H	1090	210	41
245/50 R20*	102	V	850	240	42
265/50 R20 RF*	111	H	1090	210	42
275/45 R20 RF*	110	V	1060	240	36
275/40 R20 RF*	106	V	950	240	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
8J	7J, 7½J, 8½J, 9J	258	748	C	C	71	2
9J	8½J, 9½J, 10J, 10½J	266	760	E	C	73	2
6½J	6J, 7J, 7½J, 8J	228	735	E	C	70	2
7½J	6½J, 7J, 8J, 8½J	238	698	E	C	70	2
7½J	7J, 8J, 8½J	255	755	E	C	71	2
7½J	7J, 8J, 8½J	227	688	C	C	70	2
7J	6J, 6½J, 7½J, 8J	228	711	C	C	70	2
8J	7J, 7½J, 8½J, 9J	261	743	C	C	71	2
8J	7J, 7½J, 8½J, 9J	262	765	C	C	71	2
7J	6J, 6½J, 7½J	222	699	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	244	721	E	C	70	2
6½J	6J, 7J, 7½J	217	694	C	C	70	2
7J	6J, 6½J, 7½J, 8J	230	732	C	C	70	2
8½J	7½J, 8J, 9J, 9½J	283	785	C	C	72	2
8J	7J, 7½J, 8½J, 9J	265	739	C	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	744	C	C	70	2
6½J	6J, 7J, 7½J	218	711	E	C	70	2
6½J	6J, 7J, 7½J, 8J	227	706	C	C	70	2
7J	7½J, 8J, 8½J	255	755	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	250	741	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	245	719	C	C	70	2
7½J	7J, 8J, 8½J	248	753	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	244	694	C	C	70	2
8J	7½J, 8½J, 9J, 9½J	272	775	C	C	72	2
8½J	7½J, 8J, 9J, 9½J	277	774	C	C	72	2
7½J	7J, 8J, 8½J, 9J	260	766	C	C	71	2
6½J	6J, 7J, 7½J	233	724	E	C	70	2
7J	7½J, 8J, 8½J	243	752	C	C	70	2
7J	6½J, 7½J, 8J, 8½J	240	717	C	C	70	2
8J	7J, 7½J, 8½J, 9J	272	778	C	C	71	2
8J	7½J, 8½J, 9J, 9½J	273	774	C	C	71	2
9½J	9J, 10J, 10½J	285	739	C	C	72	2
9½J	9J, 10J, 10½J, 11J	278	728	C	C	73	2
6½J	5½J, 6J, 7J	224	710	C	C	70	2
6½J	6J, 7J, 7½J, 8J	229	726	C	C	70	2
7½J	7J, 8J, 8½J, 9J	260	762	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	260	764	C	C	71	2
6J	5J, 5½J, 6½J, 7J	212	667	C	C	70	2
7J	6½J, 7½J, 8J, 8½J	240	738	E	C	70	2
6½J	5½J, 6J, 7J	225	680	E	C	70	2
5½J	5J, 6J, 6½J, 7J	209	728	C	C	70	2
7½J	7J, 8J, 8½J, 9J	260	738	E	C	71	2
6½J	6J, 7J, 7½J, 8J	235	732	C	C	70	2
7J	6J, 6½J, 7½J, 8J	240	736	C	C	70	2
7J	6½J, 7½J, 8J	248	750	E	C	70	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST 850 PROVAN

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
195 R14 C	8PR	106/104	R	1900	3600
195 R15 C	8PR	106/104	R	1900	3600
225/70 R15 C	8PR	112/110	R	2240	4240
225/70 R15 C	16PR	116/114	R	2500	4720

ST 850 PLUS PROVAN

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
5,00 R12 C	8PR	83/81	P	974	1848
155 R12 C	8PR	88/86	N	1120	2120
155 R13 C	6PR	85/83	N	1030	1948
185 R14 C	8PR	102/100	R	1700	3200
165/70 R14 C	6PR	89/87	R	1160	2180
185 R15 C	8PR	103/102	R	1750	3400
195/70 R15 C	8PR	104/102	R	1800	3400
205/70 R15 C	8PR	106/104	R	1900	3600
215/70 R15 C	8PR	109/107	S	2060	3900
205/65 R15 C	8PR	102/100	T	1700	3200
175/75 R16 C	8PR	101/99	R	1650	3100
185/75 R16 C	8PR	104/102	R	1800	3400
195/75 R16 C	8PR	107/105	R	1950	3700
205/75 R16 C	8PR	110/108	R	2120	4000
205/75 R16 C	10PR	113/111	R	2300	4360
215/75 R16 C	8PR	113/111	R	2300	4360
215/75 R16 C	10PR	116/114	R	2500	4720
225/75 R16 C	8PR	118/116	R	2640	5000
205/65 R16 C	8PR	107/105	T	1950	3700
215/65 R16 C	8PR	109/107	R	2060	3900
225/65 R16 C	8PR	112/110	R	2240	4240
235/65 R16 C	8PR	115/113	R	2430	4600

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
170	65	5½J	5J, 6J	196	669	E	A	72	2
170	65	5½J	5J, 6J	196	691	E	A	72	2
170	65	6½J	6J, 7J	228	697	E	A	72	2
170	80	6½J	6J, 7J	228	697	E	A	72	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
150	65	3½J	3½J	141	565	F	B	71	2
140	65	4½J	4,00B, 4,50B, 4J, 5J	155	552	F	B	72	2
140	51	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	154	573	F	B	72	2
170	65	5½J	5J, 6J	185	650	E	A	71	2
170	54	5J	4½J	167	592	E	B	72	2
170	65	5½J	5J, 6J	186	675	E	A	71	2
170	65	6J	5J, 5½J	196	651	E	A	72	2
170	65	6J	5½J, 6½J	206	668	E	A	72	2
180	65	6½J	5½J, 6J, 7J	222	679	E	A	72	2
190	54	6J	5½J, 6½J	206	650	C	A	71	2
170	69	5J	4 ½ J, 5½J,	170	668	E	A	72	2
170	69	5J	5½J, 6J	180	684	E	A	72	2
170	69	5½J	5J, 6J	192	698	E	A	72	2
170	69	5½J	6J, 6½J	200	712	E	A	72	2
170	76	5½J	6J, 6½J	200	712	E	A	72	2
170	69	6J	5½J, 6½J, 7J	216	734	E	A	72	2
170	76	6J	5½J, 6½J, 7J	216	734	E	A	72	2
170	76	6J	6½J, 7J	224	740	E	A	72	2
190	69	6J	5½J, 6½J	206	677	C	A	71	2
170	69	6½J	6J, 7J	219	684	E	A	72	2
170	69	6½J	6J, 7J	223	702	E	A	72	2
170	69	7J	6½J, 7½J	238	717	E	A	72	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST 860 PROVAN

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
215/65 R15 C	6PR	104/102	T	1800	3400
225/70 R15 C	8PR	112/110	R	2240	4240
195/60 R16 C	6PR	99/97	T	1550	2920
285/65 R16 C	10PR	128	N	3600	-
235/65 R16 C	12PR	121/119	R	2900	5440
235/65 R16 C	8PR	115/113	R	2430	4600
215/65 R16 C	8PR	109/107	T	2060	3900
205/65 R16 C	8PR	107/105	T	1950	3700
195/65 R16 C	8PR	104/102	T	1800	3400
215/75 R16 C	10PR	116/114	R	2500	4720
215/75 R16 C	8PR	113/111	R	2300	4360
205/75 R16 C	8PR	110/108	R	2120	4000

ST 900 PROTERRA

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155 R12 C	8PR	88/86	N	1120	2120
155 R13 C	8PR	90/89	N	1200	2320
185 R14 C	8PR	102/100	R	1700	3200
195 R14 C	8PR	106/104	R	1900	3600
195/70 R15 C	8PR	104/102	R	1800	3400
205/70 R15 C	8PR	106/104	R	1900	3600
215/70 R15 C	8PR	109/107	R	2060	3900
225/70 R15 C	8PR	112/110	R	2240	4240
205/65 R15 C	8PR	102/100	T	1700	3200
185/75 R16 C	8PR	104/102	R	1800	3400
195/75 R16 C	8PR	107/105	R	1950	3700
205/75 R16 C	8PR	110/108	R	2120	4000
215/75 R16 C	8PR	113/111	R	2300	4360
225/75 R16 C	8PR	118/116	R	2640	5000
205/65 R16 C	8PR	107/105	T	1950	3700
215/65 R16 C	8PR	109/107	R	2060	3900
225/65 R16 C	8PR	112/110	R	2240	4240
235/65 R16 C	8PR	115/113	R	2430	4600

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
190	54	6½J	6J, 7J	218	660	C	A	71	2
170	65	6½J	6J, 7J	227	694	C	A	72	2
190	54	6J	5½J, 6½J	201	645	E	A	71	2
140	76	8½J	8J, 9J	298	777	C	A	72	2
170	83	7J	6½J, 7½J	240	716	C	A	72	2
170	69	7J	6½J, 7½J	240	716	C	A	72	2
190	69	6½J	6J, 7J	218	682	C	A	71	2
190	69	6J	5½J, 6½J	205	674	C	A	71	2
190	69	6J	5½J	201	660	E	A	71	2
170	76	6J	5½J, 6½J, 7J	213	723	C	A	71	2
170	69	6J	5½J, 6½J, 7J	216	728	C	A	71	2
170	69	5½J	6J, 6½J	201	709	C	A	71	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4,00B, 4,50B, 4J, 5J	157	550	F	C	71	2
140	65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	F	C	71	2
170	65	5½J	5J, 6J	188	650	F	B	71	2
170	65	5½J	5J, 6J	198	666	F	A	71	2
170	65	6J	5J, 5½J	201	655	F	A	71	2
170	65	6J	5½J, 6½J	209	669	F	A	71	2
170	65	6½J	5½J, 6J, 7J	221	683	F	A	71	2
170	65	6½J	6J, 7J	228	697	F	A	71	2
190	54	6J	5½J, 6½J	209	647	E	A	71	2
170	69	5J	5½J, 6J	184	685	F	B	71	2
170	69	5½J	5j, 6J	196	699	F	A	71	2
170	69	5½J	6J, 6½J	203	715	F	A	71	2
170	69	6J	5½J, 6½J, 7J	216	729	F	A	71	2
170	76	6J	6½J, 7J	223	744	F	A	71	2
190	69	6J	5½J, 6½J	209	673	E	A	71	2
170	69	6½J	6J, 7J	221	686	F	A	71	2
170	69	6½J	6J, 7J	228	699	F	A	71	2
170	69	7J	6½J, 7½J	240	712	F	A	71	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST 950 PROWIN

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155 R12 C	8PR	88/86	N	1120	2120
155 R13 C	6PR	85/83	N	1030	1948
185 R14 C	8PR	102/100	R	1700	3200
195 R14 C	8PR	106/104	R	1900	3600
195/70 R15 C	8PR	104/102	R	1800	3400
205/70 R15 C	8PR	106/104	R	1900	3600
215/70 R15 C	8PR	109/107	R	2060	3900
225/70 R15 C	8PR	112/110	R	2240	4240
205/65 R15 C	8PR	102/100	T	1700	3200
175/75 R16 C	8PR	101/99	R	1650	3100
185/75 R16 C	8PR	104/102	R	1800	3400
195/75 R16 C	8PR	107/105	R	1950	3700
205/75 R16 C	8PR	110/108	R	2120	4000
215/75 R16 C	8PR	113/111	R	2300	4360
225/75 R16 C	8PR	118/116	R	2640	5000
205/65 R16 C	8PR	107/105	T	1950	3700
215/65 R16 C	8PR	109/107	R	2060	3900
225/65 R16 C	8PR	112/110	R	2240	4240
235/65 R16 C	8PR	115/113	R	2430	4600
195/60 R16 C	6PR	99/97	T	1550	2920

ST 960 PROWIN

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155 R12 C	8PR	88/86	N	1120	2120
155 R13 C	6PR	85/83	N	1030	1948
185 R14 C	8PR	102/100	R	1700	3200
195 R14 C	8PR	106/104	R	1900	3600
195/70 R15 C	8PR	104/102	R	1800	3400
205/70 R15 C	8PR	106/104	R	1900	3600
225/70 R15 C	8PR	112/110	R	2240	4240
215/65 R15 C	6PR	104/102	T	1800	3400
185/75 R16 C	8PR	104/102	R	1800	3400
195/75 R16 C	8PR	107/105	R	1950	3700
205/75 R16 C	10PR	113/111	R	2300	4360
215/75 R16 C	10PR	116/114	R	2500	4720
225/75 R16 C	8PR	118/116	R	2640	5000
195/65 R16 C	8PR	104/102	T	1800	3400
205/65 R16 C	8PR	107/105	T	1950	3700
215/65 R16 C	8PR	109/107	R	2060	3900
225/65 R16 C	8PR	112/110	R	2240	4240
235/65 R16 C	12PR	121/119	R	2900	5440
285/65 R16 C	10PR	128	N	3600	-
195/60 R16 C	6PR	99/97	T	1550	2920

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4,00B, 4,50B, 4J, 5J	157	551	G	C	71	2
140	51	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	G	C	71	2
170	65	5½J	5J, 6J	188	650	G	B	71	2
170	65	5½J	5J, 6J	198	670	G	B	73	2
170	65	6J	5J, 5½J	201	655	G	B	73	2
170	65	6J	5½J, 6½J	209	669	F	B	73	2
170	65	6½J	5½J, 6J, 7J	221	683	F	B	73	2
170	65	6½J	6J, 7J	228	697	F	B	72	2
190	54	6J	5½J, 6½J	209	647	F	B	73	2
170	69	5J	4 ½ J, 5½J,	172	672	G	B	73	2
170	69	5J	5½J, 6J	180	692	G	B	73	2
170	69	5½J	5j, 6J	196	708	G	B	73	2
170	69	5½J	6J, 6½J	203	718	F	B	73	2
170	69	6J	5½J, 6½J, 7J	216	734	F	B	73	2
170	76	6J	6½J, 7J	223	744	F	B	73	2
190	69	6J	5½J, 6½J	209	672	F	B	73	2
170	69	6½J	6J, 7J	221	687	F	B	73	2
170	69	6½J	6J, 7J	228	699	F	B	73	2
170	69	7J	6½J, 7½J	240	712	F	B	73	2
190	54	6J	5½J, 6½J	201	640	G	B	73	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4,00B, 4,50B, 4J, 5J	154	550	F	B	73	2
140	51	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	F	B	73	2
170	65	5½J	5J, 6J	188	650	G	B	73	2
170	65	5½J	5J, 6J	198	666	F	B	73	2
170	65	6J	5J, 5½J	198	661	F	B	73	2
170	65	6J	5½J, 6½J	221	673	F	B	73	2
170	65	6½J	6J, 7J	222	698	F	B	73	2
190	54	6½J	6J, 7J	211	660	F	A	73	2
170	69	5J	5½J, 6J	184	684	G	B	73	2
170	69	5½J	5j, 6J	196	698	F	B	73	2
170	76	5½J	6J, 6½J	203	711	F	B	73	2
170	76	6J	5½J, 6½J, 7J	216	728	F	B	73	2
170	76	6J	6½J, 7J	225	747	F	B	73	2
190	69	6J	5½J	201	660	G	B	73	2
190	69	6J	5½J, 6½J	200	677	F	B	73	2
170	69	6½J	6J, 7J	215	690	F	B	73	2
170	69	6½J	6J, 7J	228	698	F	B	73	2
170	80	7J	6½J, 7½J	238	716	F	B	73	2
140	76	8½J	8J, 9J	297	778	F	A	75	2
190	54	6J	5½J, 6½J	201	640	F	B	73	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.


*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

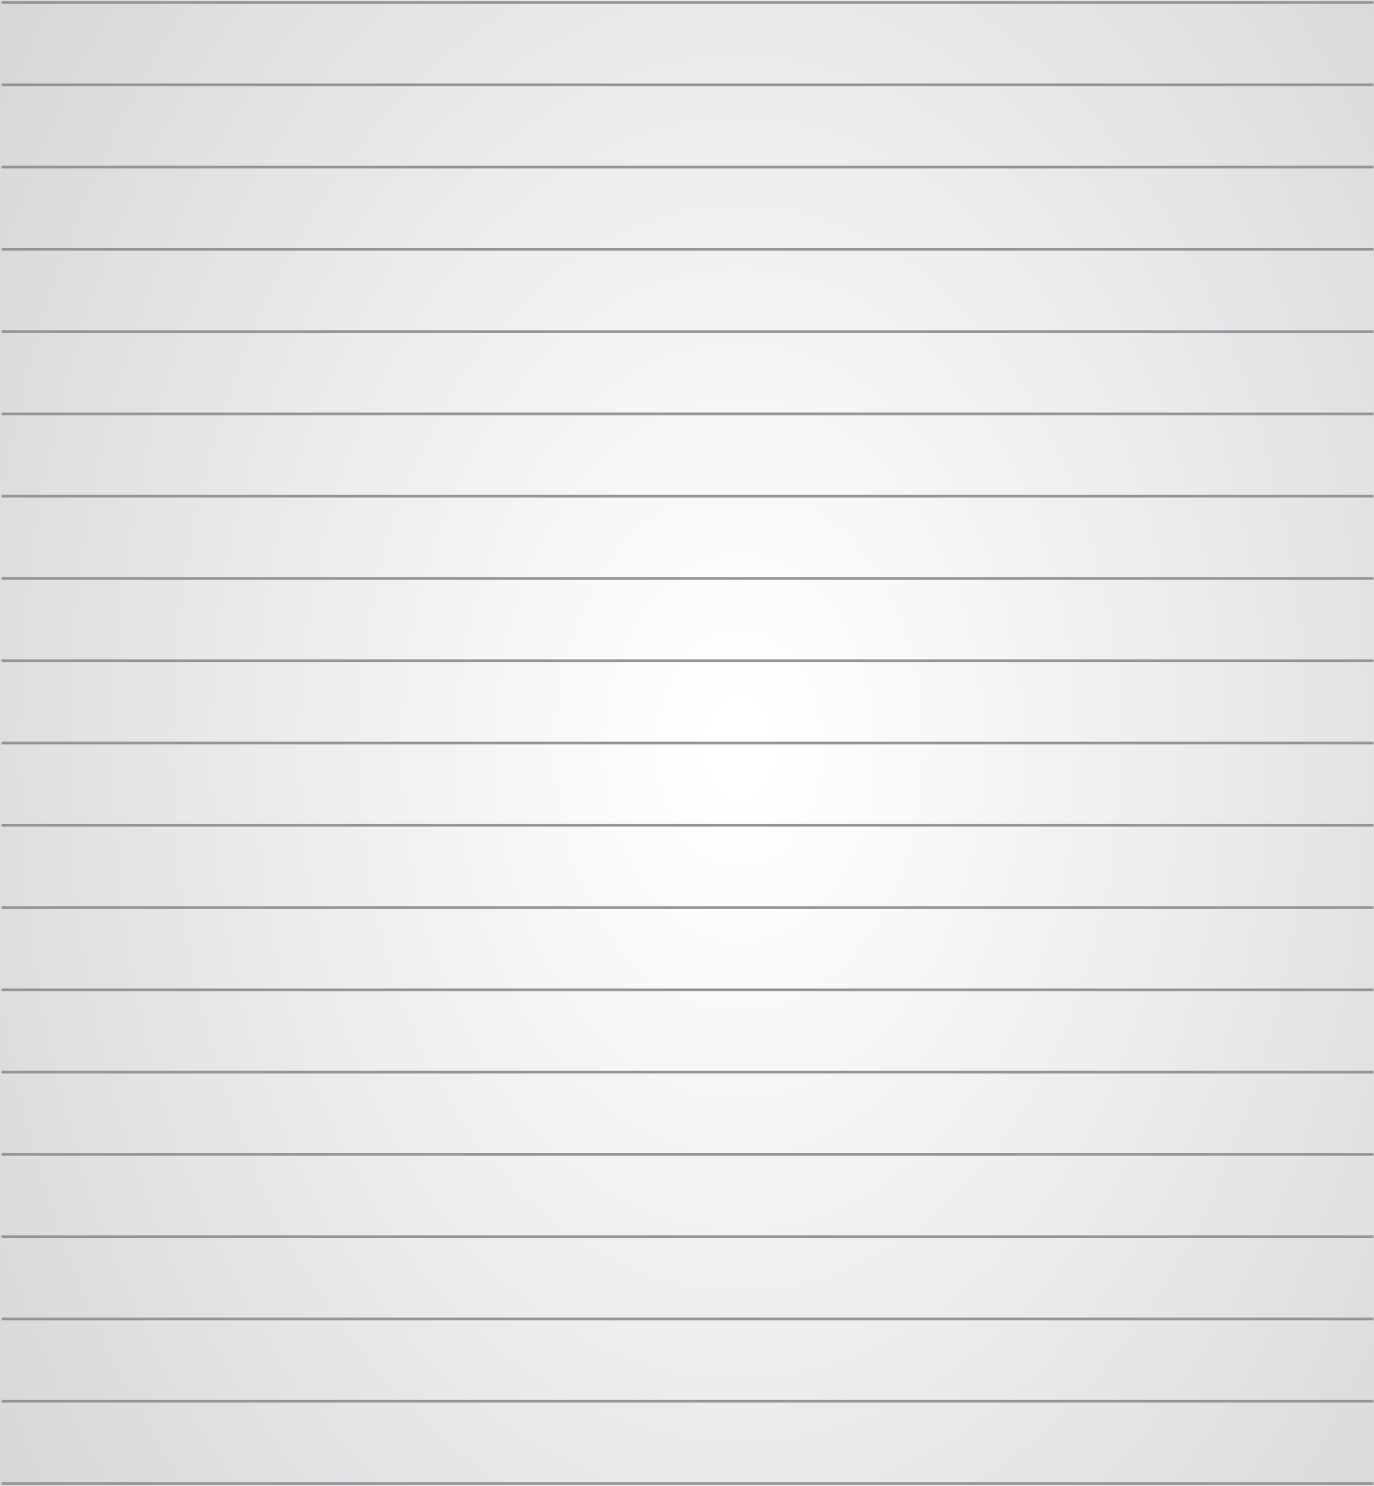

NOTES

Starmaxx Passenger, Light Truck and 4x4 Suv Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.






The visual content of the catalogue is only representative. To find the compatible tire for your car, please refer to the car service or authorized dealer.

Starmaxx Passenger, PCR-4x4 & SUV-LTR Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.

DISTRIBUTED BY



Headquarters - Factory

Petlas Tire Industry and Trade Kindam Mahallesi Ankara-Kayseri Caddesi No:2/1 Kırşehir / TURKEY T.+90 386 252 65 50 F.+90 386 252 65 70

Int. Sales & Marketing

Petlas Tire Industry and Trade Kazım Karabekir Cd. Özcan Plaza No.124 06050 Ankara / TURKEY T. +90 312 309 30 30 F.+90 312 310 95 09

USA Sales Office

11111 E.Lincolnway STE 205 Chyenne, WY 82001 USA

www.starmaxx.com **MADE IN TURKEY**

 **starmaxx**
HIGH PERFORMANCE TIRES