# AGRICULTURAL TIRES



# RANGE OF STARMAXX AGRICULTURAL TIRES

### DESCRIPTION

- \* For load capacity and inflation pressure figures on different speed rates, please consult the producer company.
- \*\* Load capacity on standard speed and standard load.
- Our company is entitled to change any information in this catalogue without prior notice.
- This catalogue overrides any previous catalogues
- All figures are for reference; our company cannot be deemed responsible for printing errors.
- \*\*\* The visual content of the catalogue is only representative. To find the compatible tire for your car, please refer to the car service or authorized dealer.

### TRACTOR FRONT

















### TRACTOR REAR









### TRACTOR RADIAL











### TRAILER RADIAL / TRAILER

























### HARVESTER RADIAL / HARVESTER



















### FORESTRY-FLOTATION











Ideal 2WD tractor front tire with its special 3Rib design.

- ·The rib design provides ultimate steering performance during soil tillage operations cultivated also across soft and areas. ·Highly resistant to cut and wears due to its strong nylon carcass structure.
- ·Offers long service life.
- ·Flexible carcass structure prevents sinking.
  - ·Special tread design provides efficient selfcleaning.



| 6.00-16  | 6PR  | TT | 88/A6  |
|----------|------|----|--------|
| 6.00-16  | 10PR | TT | 98/A8  |
| 7.50-16  | 8PR  | TT | 103/A6 |
| 9.00-16  | 8PR  | TT | 111/A6 |
| 11.00-16 | 8PR  | TT | 118/A6 |





Front tire for 2WD tractors appropriate to use on field and short distance road operations.

- -Durable shoulders increase tire resistance to any kind of damage and protect the tire effectively. Specially rounded thread root offers high endurance to stubble impacts and fissures.
- •The strong carcass structure provides longevity.
  •Special tread geometry provides easy steering.
- ·Flexible carcass structure prevents sinking.







| 6.00-16 | 6PR  | TT | 88/A6  |
|---------|------|----|--------|
| 6.00-16 | 10PR | TT | 98/A8  |
| 6.50-16 | 6PR  | TT | 91/A6  |
| 6.50-16 | 8PR  | TT | 97/A6  |
| 7.50-16 | 8PR  | TT | 103/A6 |
|         |      |    |        |





Front tire for 2WD tractors appropriate to use on field and short distance road operations.

·Tread pattern and flexible carcass maneuverability structure provide excellent without sinking into the soil. tread compound enable ·Improved high resistance against wear and cuts

·Strong center and shoulder design provides high resistance to side impacts and tread base fatigue. Special tread geometry provides easy steering. ·Flexible carcass structure prevents sinking.







| 6.00 -16 | 6PR | TT | 88/A6  |
|----------|-----|----|--------|
| 7.50- 16 | 6PR | TT | 98/A6  |
| 7.50- 16 | 8PR | TT | 103/A6 |





Ideal 2WD tractor front tire with its special 3Rib design.

The rib design provides ultimate steering performance during soil tillage operations also across soft and cultivated areas. Highly resistant to cut and wears as a result of its strong nylon carcass structure. Offers long service life.

Flexible carcass structure prevents sinking.
 Special tread design provides efficient self-cleaning.







SIZE

10.00 -16 8PR TT 114/A6





Fronttire for 2WD tractors appropriate to use on field and short distance road operations.

- Durable shoulders increase tire resistance to any kind of damage and protect the tire effectively.

  Specially rounded thread root offers high endurance to stubble impacts and fissures.

  Offers long life thanks to the use
- of a wear-resistant tread compound.

  Keep the tread pattern free from the mud by special tread design.







| 5.50-16 | 6PR  | TT | 86/A6  |
|---------|------|----|--------|
| 6.00-16 | 6PR  | TT | 88/A6  |
| 6.50-16 | 6PR  | TT | 91/A6  |
| 6.50-16 | 8PR  | TT | 97/A6  |
| 7.50-16 | 8PR  | TT | 98/A6  |
| 7.50-16 | 8PR  | TT | 103/A6 |
| 6.00-19 | 6PR  | TT | 93/A6  |
| 6.50-20 | 8PR  | TT | 108/A6 |
| 6.50-20 | 10PR | TT | 115/A6 |
| 7.50-20 | 8PR  | TT | 108/A6 |
| 7.50-20 | 10PR | TT | 115/A6 |





Front tire for 2WD tractors appropriate to use on field and short distance road operations.

-Tread pattern and flexible carcass structure provide excellent maneuverability without sinking into the soil.
-Improved tread compound enable high resistance against wears and cuts.

·Strong center and shoulder design provides high resistance to side impacts and tread base fatigue.

 $\cdot Special \, tread \, geometry \, provides \, easy \, steering. \,$ 

·Flexible carcass structure prevents sinking.







| 6.50-16 | 6PR | TT | 91/A6  |
|---------|-----|----|--------|
| 6.50-16 | 8PR | TT | 97/A6  |
| 7.50-18 | 8PR | TT | 106/A6 |
| 7.50-20 | 8PR | TT | 108/A6 |
|         |     |    |        |





High traction R1 tractor front tire for medium and low powered tractors.

- Offers effective self-cleaning feature and grip performance during tillage operations by its special tread geometry.
- ·Highly resistant to cuts and wears.
- Tread profile provides high resistance to tread base fatigue.
- ·Wide and strong body provides easy grip and high traction.
- ·Special tread geometry provides efficient selfcleaning.







| 6.5/80-12 | 6PR | TT | 80/A6 |
|-----------|-----|----|-------|
| 6.5/80-12 | 6PR | TL | 80/A6 |
| 6.5/80-13 | 6PR | TT | 82/A6 |



High traction R1 tractor front tire for medium and low powered tractors.

·The wide and long lugs provide comfortable drive while increasing grip capacity.

Offers long service life thanks to the use of a wear resistant tread compound.

-Efficient self-cleaning thanks to special tread design.

·Tread profile enable high resistance to tread base fatigue.

Wide and strong body provides easy grip and high traction.

-Special tread geometry provides efficient self-cleaning.







| 5.00-10      | 4PR  | TT | 70/58A6 |
|--------------|------|----|---------|
| 5.00-12      | 4PR  | TT | 62/A6   |
| 6.5/80-12    | 6PR  | TT | 80/A6   |
| 7.00-12      | 6PR  | TT | 83/A6   |
| 10.0/80-12   | 6PR  | TT | 98/A6   |
| 10.0/80-12   | 6PR  | TL | 98/A6   |
| 5.00-15      | 6PR  | TT | 88/A6   |
| 10.0/75-15.3 | 12PR | TT | 114/A6  |
| 11.5/80-15.3 | 12PR | TT | 123/A6  |
| 11.5/80-15.3 | 12PR | TL | 123/A6  |
| 6.00-16      | 6PR  | TT | 88/A6   |
| 6.50-16      | 6PR  | TT | 91/A6   |
| 7.50-16      | 8PR  | TT | 103/A6  |
| 7.00-18      | 8PR  | TT | 106/A6  |
| 7.50-18      | 8PR  | TT | 106/A6  |
| 7.50-20      | 8PR  | TT | 108/A6  |
| 9.50-20      | 8PR  | TT | 107/A6  |





High traction R1 tractor rear tire for medium and low powered tractors.

- The wide and long lugs provide comfortable drive while increasing grip capacity.
- Offers long service life thanks to the use of a wear resistant tread compound
- ·Efficient self-cleaning thanks to special tread design.
  ·Tread profile enable high resistance to tread base
- fatigue.

  Special tread geometry provides efficient self-cl
- ·Wide and strong body provides easy grip and high traction.







| 8.3-24     | 8PR  | TT | 108/A6 | 16.9/14-30 | 12PR | TT | 143/A6 |
|------------|------|----|--------|------------|------|----|--------|
| 9.5-24     | 8PR  | TT | 112/A6 | 16.9/14-30 | 14PR | TT | 144/A6 |
| 11.2-24    | 8PR  | TT | 116/A6 | 18.4/15-30 | 6PR  | TT | 134/A6 |
| 14.9/13-24 | 4PR  | TL | 112/A6 | 18.4/15-30 | 8PR  | TT | 139/A6 |
| 14.9/13-24 | 4PR  | TT | 112/A6 | 18.4/15-30 | 10PR | TT | 145/A6 |
| 14.9/13-24 | 6PR  | TT | 123/A6 | 18.4/15-30 | 12PR | TT | 149/A6 |
| 14.9/13-24 | 8PR  | TT | 128/A6 | 18.4/15-30 | 14PR | TT | 151/A6 |
| 14.9/13-24 | 10PR | TT | 134/A6 | 12.4/11-32 | 8PR  | TT | 124/A6 |
| 14.9/13-24 | 14PR | TT | 142/A6 | 16.9/14-34 | 8PR  | TT | 139/A6 |
| 12.4/11-24 | 6PR  | TT | 115/A6 | 16.9/14-34 | 10PR | TT | 142/A6 |
| 12.4/11-24 | 8PR  | TT | 120/A6 | 16.9/14-34 | 12PR | TT | 145/A6 |
| 12.4/11-24 | 12PR | TT | 128/A6 | 16.9/14-34 | 14PR | TT | 148/A6 |
| 13.6/12-24 | 8PR  | TT | 123/A6 | 18.4/15-34 | 8PR  | TT | 141/A6 |
| 18.4/15-26 | 12PR | TT | 146/A6 | 18.4/15-34 | 10PR | TT | 146/A6 |
| 18.4/15-26 | 14PR | TT | 149/A6 | 18.4/15-34 | 12PR | TT | 151/A6 |
| 18.4/15-26 | 12PR | TL | 146/A6 | 18.4/15-34 | 14PR | TT | 156/A6 |
| 11.2-28    | 8PR  | TT | 118/A6 | 12.4/11-36 | 8PR  | TT | 126/A6 |
| 12.4/11-28 | 6PR  | TT | 117/A6 | 13.6/12-36 | 6PR  | TT | 125/A6 |
| 12.4/11-28 | 8PR  | TT | 122/A6 | 13.6/12-36 | 8PR  | TT | 129/A6 |
| 13.6/12-28 | 6PR  | TT | 121/A6 | 13.6/12-38 | 8PR  | TT | 131/A6 |
| 13.6/12-28 | 8PR  | TT | 125/A6 | 14.00-38   | 8PR  | TT | 131/A6 |
| 14.9/13-28 | 6PR  | TT | 125/A6 | 14.00-38   | 10PR | TT | 136/A6 |
| 14.9/13-28 | 8PR  | TT | 130/A6 | 15.5-38    | 8PR  | TT | 133/A6 |
| 16.9/14-28 | 8PR  | TT | 135/A6 | 15.5-38    | 10PR | TT | 138/A6 |
| 16.9/14-28 | 10PR | TT | 139/A6 | 15.5-38    | 12PR | TT | 142/A6 |
| 16.9/14-28 | 12PR | TT | 143/A6 | 15.5-38    | 14PR | TT | 145/A6 |
| 14.9/13-30 | 8PR  | TT | 131/A6 | 16.9/14-38 | 8PR  | TT | 141/A6 |
| 14.9/13-30 | 10PR | TT | 135/A6 | 16.9/14-38 | 10PR | TT | 144/A6 |
| 16.9/14-30 | 6PR  | TT | 130/A6 | 16.9/14-38 | 12PR | TT | 142/A6 |
| 16.9/14-30 | 8PR  | TT | 137/A6 | 18.4-38    | 8PR  |    |        |
| 16.9/14-30 | 10PR | TT | 139/A6 | 18.4-38    | 10PR | TT | 147/46 |
|            |      |    |        |            |      |    |        |



Tractor rear tire suitable for field operations

Provide excellent and extra traction in all working condition by high lugs

 $\cdot Resistant$  to cuts and wears thanks to its special compound.

Strong nylon carcass structure provides optimum durability.

Open center pattern provides efficient self-deaning and offers high resistance to tread base fatigue. Safe handling on hilly or sloping grounds.







| 8PR  | TT   | 137/A6  |
|------|------|---------|
| 10PR | TT   | 139/A6  |
| 12PR | TT   | 144/A6  |
|      | 10PR | 10PR TT |





R1 tractor rear tire.

•The special lug design reduces any kind of crop damage during field operations.
•Exceptional carcass structure provides optimum durability.

-Tread profile with extra wide tread base provides perfect resistance to tread base fatigue. -Wide and reinforced body provides easy grip, high traction and reduced slipping.

Special tread design for tough terrains provides superior performance.

·Easy lug cleanability.







| 9.5-24     | 8PR  | TT    | 112/A6 |
|------------|------|-------|--------|
| 11.2-24    | 8PR  | TT    | 116/A6 |
| 12.4/11-24 | 8PR  | TT    | 120/A6 |
| 12.4/11-24 | 10PR | TT    | 124/A6 |
| 13.6/12-24 | 8PR  | TT    | 123/A6 |
| 14.9/13-24 | 8PR  | TT    | 128/A6 |
| 12.4/11-28 | 8PR  | TT    | 122/A6 |
| 13.6/12-28 | 8PR  | TT    | 125/A6 |
| 14.9/13-28 | 8PR  | TT    | 130/A6 |
| 14.9/13-30 | 8PR  | TT    | 131/A6 |
| 16.9/14-30 | 8PR  | TT    | 137/A6 |
| 16.9/14-30 | 10PR | TT    | 139/A6 |
| 18.4/15-30 | 8PR  | TT    | 139/A6 |
| 18.4/15-30 | 10PR | TT    | 145/A6 |
| 18.4/15-30 | 12PR | TT    | 149/A6 |
| 18.4/15-30 | 14PR | TT    | 151/A6 |
| 16.9/14-34 | 8PR  | TT    | 139/A6 |
| 18.4/15-34 | 8PR  | TT    | 141/A6 |
| 12.4/11-36 | 8PR  | TT    | 126/A6 |
| 13.6/12-36 | 8PR  | ŤŤ    | 129/A6 |
| 16 9/14-38 | 8PR  | AllTT | 141/46 |



SIZE

R1 tire designed for high load tractor and harvester applications

·With specially developed its design, it provides superior tread without damaging your crops and compacting the soil. its specially developed tread ·With and lug geometry, compounds it offers high resistance against fatigue and tread wear. ·Low profile structure provides excellent maneuverability and handling comfort. ·Reduced vibration with frequently placed lugs.

Superior durability against cuts and impacts with reinforced sidewalls. ·Offers high load capacity.







- ·Provides optimal traction and high performance during its service life. ·Wide footprint provides lower soil compaction. ·Ensures a balanced steering by reduced slip at all surface.
- ·Offer excellent self-cleaning features.
- Special tread compound provides high resistance against wears and cuts
- ·Tread profile provides high resistance against tread base fatigue.
- Special tread structure provides less sinking at soft surfaces. Wide footprint provides lower soil compaction.
   Ensures a balanced steering by reducing slip at all surfaces.







# ALL SIZES TR-110/85 SERIES

| 9.5    | R20               | TL | 108 A8/105 B |
|--------|-------------------|----|--------------|
| 280/85 | R20 (11.2 R20)    | TL | 112 A8/109 B |
| 320/85 | R20 (12.4 R20)    | TL | 119 A8/116 B |
| 9.5    | R24               | TL | 107 A8/104 B |
| 280/85 | R24 (11.2 R24)    | TL | 115 A8/112 B |
| 320/85 | R24 (12.4 R24)    | TL | 122 A8/119 B |
| 340/85 | R24 (13.6 R24)    | TL | 125 A8/122 B |
| 380/85 | R24 (14.9 R24)    | TL | 131 A8/128 B |
| 420/85 | R24 (16.9 R24)    | TL | 137 A8/134 B |
| 280/85 | R28 (11.2 R28)    | TL | 118 A8/115 B |
| 320/85 | R28 (12.4 R28)    | TL | 124 A8/121 B |
| 340/85 | R28 (13.6 R28)    | TL | 127 A8/124 B |
| 380/85 | R28 (14.9 R28)    | TL | 133 A8/130 B |
| 420/85 | R28 (16.9 R28)    | TL | 139 A8/136 B |
| 380/85 | R30 (14.9 R30)    | TL | 135 A8/132 B |
| 420/85 | R30 (16.9 R30)    | TL | 140 A8/137 B |
| 460/85 | R30 (18.4 R30)    | TL | 145 A8/142 B |
| 320/85 | R32 (12.4 R32)    | TL | 126 A8/126 B |
| 380/85 | R34 (14.9 R34)    | TL | 137 A8/137 B |
| 420/85 | R34 (16.9 R34)    | TL | 142 A8/139 B |
| 460/85 | R34 (18.4 R34)    | TL | 147 A8/144 B |
| 320/85 | R36 (12.4 R36)    | TL | 128 A8/125 B |
| 340/85 | R36 (13.6 R36)    | TL | 132 A8/129 B |
| 320/85 | R38 (12.4 R38)    | TL | 143 A8/143 B |
| 340/85 | R38 (13.6 R38)    | TL | 133 A8/130 B |
| 380/85 | R38 (14.9 R38)    | TL | 139 A8/136 B |
| 420/85 | R38 (16.9 R38)    | TL | 144 A8/141 B |
| 460/85 | R38 (18.4 R38)    | TL | 149 A8/146 B |
| 460/85 | R38 (18.4 R38) RF | TL | 149 A8/146 B |
| 520/85 | R38 (20.8 R38)    | TL | 155 A8/152 B |
| 520/85 | R38 (20.8 R38) RF | TL | 155 A8/152 B |
| 650/85 | R38 (20.8 R38)    | TL | 173 A8/173 B |
| 520/85 | R42 (20.8 R42)    | TL | 157 A8/157 B |
| 520/85 | R42 (20.8 R42) RF | TL | 162 A8/162 B |

TL

158 A8/155 B

520/85 R46 (20.8 R46)

### TR-110/80 SERIES

| 260/80 R20 (8.00 R20) | TL | 106 A8/103 B |
|-----------------------|----|--------------|
| 480/80 R38 (18.4R 38) | TL | 149 A8/149 B |
| 480/80 R42 (18.4 R42) | TL | 151 A8/148 B |
| 480/80 R46 (18.4 R46) | TL | 158 A8/158 B |
| 480/80 R50 (18.4 R50) | TL | 159 A8/159 B |

### TR-110/70 SERIES

| 200/70 R16            | TL | 94 A8/94 B   |
|-----------------------|----|--------------|
| 240/70 R16 (6.00 R16) | TL | 104 A8/101 B |
| 260/70 R16 (6.50 R16) | TL | 109 A8/106 B |
| 280/70 R16 (7.50 R16) | TL | 112 A8/112 B |
| 280/70 R18 (7.50 R18) | TL | 114 A8/114 B |
| 260/70 R20 (6.50 R20) | TL | 113 A8/113 B |
| 280/70 R20 (7.50 R20) | TL | 116 A8/116 B |
| 300/70 R20 (9.50 R20) | TL | 110 A8/110 B |
| 320/70 R20 (11.2 R20) | TL | 113 A8/113 B |
| 360/70 R20 (12.4 R20) | TL | 120 A8/117 B |
| 380/70 R20 (13.6 R20) | TL | 132 A8/132 B |
| 320/70 R24 (11.2 R24) | TL | 116 A8/113 B |
| 360/70 R24 (12.4 R24) | TL | 122 A8/119 B |
| 380/70 R24 (13.6 R24) | TL | 125 A8/125 B |
| 420/70 R24 (14.9 R24) | TL | 130 A8/127 B |
| 480/70 R24 (16.9 R24) | TL | 138 A8/135 B |
| 480/70 R26 (16.9 R26) | TL | 139 A8/136 B |
| 320/70 R28 (11.2 R28) | TL | 119 A8/116 B |
| 360/70 R28 (12.4 R28) | TL | 125 A8/122 B |
| 380/70 R28 (13.6 R28) | TL | 127 A8/127 B |
| 420/70 R28 (14.9 R28) | TL | 133 A8/130 B |
| 480/70 R28 (16.9 R28) | TL | 140 A8/140 B |
| 420/70 R30 (14.9 R30) | TL | 134 A8/131 B |
| 480/70 R30 (16.9 R30) | TL | 141 A8/138 B |
| 520/70 R30 (18.4 R30) | TL | 145 A8/142 B |
| 480/70 R34 (16.9 R34) | TL | 143 A8/140 B |
| 520/70 R34 (18.4 R34) | TL | 148 A8/145 B |
| 480/70 R38 (16.9 R38) | TL | 145 A8/142 B |
| 520/70 R38 (18.4 R38) | TL | 150 A8/147 B |
| 580/70 R38 (20.8 R38) | TL | 155 A8/152 B |
| 580/70 R42 (20.8 R42) | TL | 158 A8/158 B |
|                       |    |              |

# TR-110/65 SERIES

| 420/65 R24 (12.4 R24) | TL | 126 D/128 B  |
|-----------------------|----|--------------|
| 440/65 R24 (13.6 R24) | TL | 128 D/131 A8 |
| 480/65 R24 (14.9 R24) | TL | 133 D/136 A8 |
| 540/65 R24 (16.9 R24) | TL | 140 D/143 A8 |
| 440/65 R28 (13.6 R28) | TL | 131 D/134 A8 |
| 480/65 R28 (14.9 R28) | TL | 136 D/139 A8 |
| 540/65 R28 (16.9 R28) | TL | 149 D/152 A8 |
| 540/65 R30 (16.9 R30) | TL | 150 D/153 A8 |
| 540/65 R34 (16.9 R34) | TL | 145 D/148 A8 |
| 600/65 R34 (18.4 R34) | TL | 151 D/154 A8 |
| 540/65 R38 (16.9 R38) | TL | 147 D/150 A8 |
| 600/65 R38 (18.4 R38) | TL | 159 D/162 A8 |
| 650/65 R38 (20.8 R38) | TL | 163 D/166 A8 |
| RF: REINFORCED        |    |              |
|                       |    |              |





General purpose R1W farm front and rear tire with narrow profile suitable to use on modern sprayers and row crop tractors.

- ·Reduced tire width enable easy driving between corps and plant without causing any damage to them.
- ·Keep the tread pattern free from the mud by special deep lugs.
- Offers robustness and high load capacity.
- ·Strong nylon carcass structure provides optimum durability.







### ALL SIZES

# TR-120/95-90-85 SERIES

| 210/95 R32 (8.3 R32)  | TL | 114 A8/114 B  |
|-----------------------|----|---------------|
| 230/95 R32 (9.5 R32)  | TL | 126 A8/126 B  |
| 270/95 R32 (11.2 R32) | TL | 136 A8/136 B  |
| 210/95 R36 (8.3 R36)  | TL | 116 A8/116 B  |
| 230/95 R36 (9.5 R36)  | TL | 128 A8/128 B  |
| 270/95 R38 (11.2 R38) | TL | 140 A8/140 B  |
| 230/95 R40 (9,5 R40)  | TL | 122 A8/122 B  |
| 210/95 R44 (8.3 R44)  | TL | 120 A8/120 B  |
| 230/95 R44 (9.5 R44)  | TL | 132 A8/132 B  |
| 270/95 R44 (11.2 R44) | TL | 142 A8/142 B  |
| 300/95 R46 (12.4 R46) | TL | 148 A8/148 B  |
| 230/95 R48 (9.5 R48)  | TL | 136 A2/125 A8 |
| 270/95 R48 (11.2 R48) | TL | 144 A8/144 B  |
| 270/95 R54 (11.2 R54) | TL | 157 A2/146 A8 |
| 300/95 R52 (12.4 R52) | TL | 156 D/159 A8  |
| 380/90 R46 (14.9 R46) | TL | 159 D/162 A8  |
| 340/85 R48 (13 6 R48) | TI | 151 D/154 A8  |

R1W tire for high power tractors and harvesters.

-Whether driving on the road or on the field offers comfort.

·Unique tread design and strong carcass offers high traction and excellent handling on the field and tillage operations. ·No plants damage thanks to its rounded lugs. Perfect performance under heavy loads as a result of its extra reinforced structure. ·It does not sink into the ground and absorbs the impacts thanks to the elastic structure ·Perfect grip to soil and slide free transmission of power to the ground with tread geometry, designed differently on center and shoulders. from side Prevention rolling. High safety thanks to improved lateral resistance with reinforced sidewall and carcass structure.







### ALL SIZES

# TR-130/70-65 SERIES

| 600/70 R28 (18.4 R30) | TL | 161 D        |
|-----------------------|----|--------------|
| 600/70 R30 (23.1 R26) | TL | 158 D        |
| 600/70 R34 (23.1 R34) | TL | 160 D        |
| 710/70 R38 (20.8 R42) | TL | 171 D/174 A8 |
| 800/70 R38 (20.8 R46) | TL | 178 D/181 A8 |
| 620/70 R42 (20.8 R42) | TL | 166 D        |
| 710/70 R42 (20.8 R46) | TL | 173 D        |
| 600/65 R28 (18.4 R28) | TL | 154 D/157 A8 |
| 600/65 R42 (18.4 R42) | TL | 154 D/157 A8 |
| 650/65 R42 (20.8 R42) | TL | 170 D/173 A8 |



# **TR-130 IF Series**



R1W tire for high power tractors.

flexible sidewalls ·Highy and reduce fuel consumption. comfort ·Perfect performance under loads with lower pressure compare to traditional radial tire constructions. ·It does not sink to the ground and absorbs the impacts thanks to the elastic structure. ·Perfect grip to soil and slide free transmission of power to the ground with tread geometry, designed differently on center and shoulders

-Special tread design provides superior performance.

·Tires designed to operate at 20% higher rated load than standard tires at the same air pressure





### ALL SIZES

### TR-130/70-IF SERIES

| IF 600/70 R30 | TL | 165 D |
|---------------|----|-------|
| IF 800/70 R38 | TL | 184 D |

IF: Improved Flexion



General purpose R1W tractor front and rear tire.

Offers durability for a wide spectrum of applications.

Special tread compound provides high resistance against wear and cuts.

-Special tread structure provides high traction and less sinking at soft surfaces.

Wide footprint provides lower soil compaction.
 Strong wear-resistant compound provides high resistance against wear and cuts, offers longevity.
 Ensures a balanced steering by reduced slip at

-It does not sink into the ground and absorbs the impacts thanks to the elastic structure.





all surfaces.



SIZE

TR-140/85 SERIES

340/85 R28 (13.6 R28)

TL

127 A8/124 B



# HST-70 VF



Multipurpose VF (Very High Flexion) all steel radial tire designed hold up to heavier loads.

- ·Thanks to VF (Very High Flexion) technology shows equal loading and driving performance under low pressure levels, compare to conventional tires.
- Tread compound provides resistance to cuts and wears on asphalt, hard soil and concrete surfaces.
- Wide footprint provides lower soil compaction.
- ·Specially steer carcass structure offers high endurance to stubble impacts and fissures.
- ·Protect crops effectively by its high flexion specialty.







SIZE

VF 285/70 R19.5 16PR TL 150/D

VF: Very High Flexion



# SM-160



Ideal trailer tire.

Offers high loading capacity with minimum soil compaction thanks to special 3 rib tread design. High resistance reinforced carcass structure improves resistant performance against cuts and wears, also enables longevity. Offers excellent self-cleaning features.







SIZE

7.50-16 10PR TT 116/A6



# SM-270



Traction type trailer tire with heavy resistance.

·With special deep and tread geometry highly resistant to cuts and tread wear. Durable tire thanks to its reinforced

sidewalls.

·High load capacity, self-cleaning and high resistance against side impacts.







| SIZE |
|------|
|      |

| 7.50-16 | 12PR | TT | 121/A6 |
|---------|------|----|--------|
|         |      |    |        |





Traction type trailer tire with heavy resistance.

-Suitable for transport and soil tillage operations.

-Special tread and carcass structure offers high load capacity. -Wide and deeper tread design provides high resistance against cuts and tread fatigue.







| 9.00-16 | 12PR | TT | 125/A6 |
|---------|------|----|--------|
| 9.00-16 | 14PR | TT | 128/A6 |
| 9.00-16 | 16PR | TT | 131/A6 |





Traction type trailer tire.

-Suitable for short period transport and use in the field areas. -Special tread and carcass structure offers high load capacity. -With its specially developed tread compound and geometry, it offers high resistance against lug fatigue and tread wear.







SIZE

8.25-20 14PR

TT

133/A6



Traction type trailer tire.

-Suitable for short period transport and use in the field areas.

-Special tread and carcass structure offers high load capacity.

·With its specially developed tread compound and geometry, it offers high resistance against lug fatigue and tread wear. ·It does not sink into the ground and absorbs the impacts thanks to the flexible carcass structure.







SIZE

9.00-20 14PR TT 133/A6





Special trailer tire.

·Special tread and carcass structure offers high load capacity on soft surfaces.

·With its specially developed tread compound and geometry, it offers high resistance against cuts and stubble puncture. ·It does not sink into the ground and absorbs the impacts thanks to the flexible carcass structure.







| 9.00-16 | 12PR | TT | 125/A6 |
|---------|------|----|--------|
| 9.00-16 | 14PR | TT | 128/A6 |
| 9.00-16 | 16PR | TT | 131/A6 |



Modern harvester and trailer tire.

·Low dynamic rotating resistance thanks to its 5 Rib design.

-Suitable for short period transport and use in the field areas.

Prevents from slide to sides and sinking into the ground due to its wide base area. High resistance against cuts and wears thanks to special tread compound.







### ALL SIZES

| 10.0/75-15.3    | 10PR | TT | 123/A8 |
|-----------------|------|----|--------|
| 10.0/75-15.3    | 10PR | TL | 123/A8 |
| 10.0/75-15.3 RF | 12PR | TL | 126/A8 |
| 10.0/75-15.3    | 14PR | TL | 130/A8 |
| 11.5/80-15.3    | 12PR | TT | 135/A6 |
| 11.5/80-15.3    | 12PR | TL | 135/A8 |
| 11.5/80-15.3 RF | 12PR | TL | 135/A8 |
| 11.5/80-15.3    | 14PR | TL | 139/A8 |
| 12.5/80-15.3    | 12PR | TL | 139/A8 |
| 12.5/80-15.3 RF | 12PR | TL | 139/A8 |
| 12.5/80-15.3    | 16PR | TL | 144/A8 |
| 400/60-15.5     | 14PR | TL | 145/A8 |
| 10.5/65-16      | 10PR | TT | 123/A8 |
| 340/55-16       | 12PR | TL | 140/A8 |
| 15.0/55-17      | 14PR | TL | 137/A8 |
| 19.0/45-17      | 12PR | TL | 141/A8 |
| 500/50-17       | 14PR | TL | 149/A8 |
| 10.5/80-18      | 14PR | TT | 142/A8 |
| 13.0/65-18      | 14PR | TT | 141/A8 |





General purpose trailer tire.

It squeezes less soil with its wide base area, so provides high traction on soft surfaces. It provides perfect balance also on soft surfaces by preventing slide to sides. High resistance against cuts and tread wear with special tread geometry design. Special tread and carcass structure offers high load capacity.







# ALL SIZES

| 10.0/80-12      | 10PR | TT | 122/A8 |
|-----------------|------|----|--------|
| 10.0/80-12      | 10PR | TL | 122/A8 |
| 260/70-15.3     | 12PR | TL | 126/A8 |
| 10.0/75-15.3    | 10PR | TT | 123/A8 |
| 10.0/75-15.3 RF | 10PR | TL | 123/A8 |
| 10.0/75-15.3    | 12PR | TL | 126/A8 |
| 11.5/80-15.3 RF | 12PR | TL | 137/A8 |
| 12.5/80-15.3 RF | 12PR | TL | 141/A8 |
| 12.5/80-15.3    | 14PR | TL | 142/A8 |
| 12.5/80-15.3    | 16PR | TL | 144/A8 |
|                 |      |    |        |





General purpose trailer tire.

- It squeezes less soil with its wide base area, so provides high traction on soft surfaces.
- -It provides perfect balance also on soft surfaces by preventing slide to sides.
- High resistance against cuts and tread wear with special tread geometry design.
   Special tread and carcass structure offers high load capacity.







### ALL SIZES

| 10.0/80-12    | 10PR | TT | 122/A8 |
|---------------|------|----|--------|
| 10.0/80-12    | 10PR | TL | 122/A8 |
| 10.0/80-12 RF | 10PR | TT | 122/A8 |
| 10.0/80-12 RF | 10PR | TL | 122/A8 |
|               |      |    |        |





Trailer tire designed for free rolling axle.

- -Superb resistance against stubble punctures and cuts with its special tread compound.
- It ensures high performance with its Low Section Height profile design.
- High flotation capability thanks to its wide tread design.
- ·Heavy load capacity and long service life due to its special durable carcass structure design.



| 9.5L-14SL  | 8PR  | TL | 111/B |
|------------|------|----|-------|
| 9.5L-15SL  | 8PR  | TT | 112/B |
| 9.5L-15SL  | 8PR  | TL | 112/B |
| 9.5L-15SL  | 12PR | TL | 121/B |
| 11L-15SL   | 8PR  | TL | 113/B |
| 11L-15SL   | 12PR | TL | 121/B |
| 12.5L-15SL | 12PR | TL | 127/B |

# SR-3



Trailer tire designed for free rolling axle.

- -Superb resistance against stubble punctures and cuts with its special tread compound.
- It ensures high performance with its Low Section Height profile design.
- ·High flotation capability thanks to its wide tread design.
- ·Heavy load capacity due to its special carcass design.
- ·Very durable tire thanks to it durable carcass structure.



# SIZE

| 10.0/75-15.3 | 12PR | TL | 126/A8 |
|--------------|------|----|--------|
|--------------|------|----|--------|



# TR-130 AGROVEST



R1W Harvester tire with aramid belted structure.

·Whether driving on the road or on the field offers comfort.

·Unique tread design and strong carcass offers high traction and excellent handling on the field and tillage operations. ·No plants damage thanks to its rounded lugs. ·Aramid belted structure makes the tire five times stronger than steel without make no extra load and offers longevity. ·It does not sink into the ground and absorbs the impacts thanks to the elastic structure. ·Perfect grip to soil / slide free transmission of power to the ground with tread geometry, designed differently on center and shoulders.



### ALL SIZES

### TR-130/75-65 SERIES

| 620/75 R26 (23.1 R26) | TL | 166 A8/163 B |
|-----------------------|----|--------------|
| 620/75 R30 (23.1 R30) | TL | 163 A8/160 B |
| 650/75 R32 (24.5 R32) | TL | 172 A8/172 B |
| 800/65 R32 (30.5 R32) | TL | 178 A8/178 B |



# SB-140 AGROVEST



Radial modern harvester rear tire with aramid belted structure.

- Offers outstanding traction on hard and soft surfaces.
- ·Special tread compound extended service life whether it is used on soft or hard surfaces.
- ·Fuel consumption efficiency thanks to its low rolling resistance.
- ·High load capacity and minimum soil compaction.
- ·Strong construction provides excellent performance and endurance.







SIZE

SB-140/70 SERIES

400/70 R20

TL

158/146 A8





Harvester rear and trailer tire.

·Unique pattern design allows excellent grip and handling in any condition.

·Stable central tread section with open shoulder design offers high comfort and longer life.

·Strong sidewall construction and resistant bead construction provides excellent protection against all kind of damage.

·Good floatation and self-cleaning features.

·Fuel consumption efficiency thanks to its low rolling resistance.







| 16.0/70-20 | 14PR | TL | 154 A8/148 A8 |
|------------|------|----|---------------|
| 400/70-20  | 14PR | TL | 154 A8/142 A8 |





Modern harvester tire.

·Low dynamic rotating resistance thanks to its 5 Rib design.

Suitable for short period transport and use in the field areas.

·Less soil compaction prevents from slide to sides and sinking into the ground due to its wide tread contact area. ·High resistance against cuts and wears thanks to special tread compound.







SIZE

12.5/80-18 14PR

TT

146/A8





### Harvester Tire.

-Offers outstanding comfort and excellent traction during its service-life by special aggressive lug design.

Keep the tread pattern free from the mud by unique lug geometry. High resistance against cuts and wears thanks to its strong durable carcass structure and special tread compound. Cost-efficient tire thanks to its performance in the field and in transport. Suitable for heavy duty using without no damage to corps.







| 18.4/15-30 | 16PR | TT | 153/A6 |
|------------|------|----|--------|
| 18.4/15-30 | 14PR | TT | 151/A6 |






# Harvester Tire.

- ·Unique lug design and geometry efficiently keep the tread pattern free from the mud and offers outstanding traction.
- ·High resistance against cuts and wears with strong durable carcass structure and special tread compound. ·Strong carcass structure also provides high load capacity.



| 23.1-26 | 12PR | TT | 153/A6 |
|---------|------|----|--------|
| 23.1-26 | 14PR | TL | 156/A6 |
| 23.1-26 | 18PR | TL | 162/A6 |
| 23.1-30 | 12PR | TT | 151/A6 |
| 23.1-30 | 14PR | TL | 154/A6 |
| 23.1-30 | 18PR | TL | 160/A6 |
| 20.8-38 | 14PR | TT | 159/A6 |
| 20.8-38 | 14PR | TL | 159/A6 |

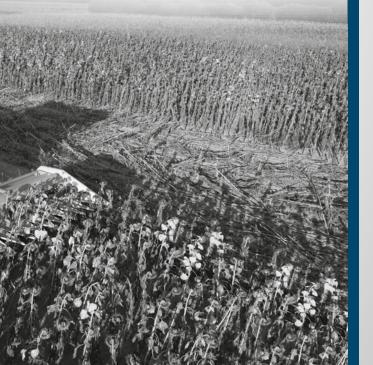



SIZE

R1 tire designed for high load tractor and harvester applications.

·With its specially developed tread design, it provides superior traction without damaging your crops and compacting the soil. With its specially developed tread compounds and lug geometry, it offers high resistance against lug fatigue and tread wear. ·Low profile structure provides excellent maneuverability and handling comfort. Reduced vibration with frequently placed lugs. -Superior durability against cuts and impacts with reinforced sidewalls. Offers high load capacity.



# **SMF-18**



General purpose floatation tire.

·Suitable to use on soft surfaces with nonaggressive pattern.

 Non-aggressive pattern design offers large footprint, reduced soil compaction and ensures perfect balance.
 Resistance against side impacts with strong structure and reinforced sidewall compound.

Absorbs side impacts with its special sidewall compound and grips the soil perfectly and prevents the vehicle to slide to sides. Strong tread and strong shoulder structure enable high load capacity.







# ALL SIZES

| 12.5/80-15.3    | 16PR | TL | 144/A8        |
|-----------------|------|----|---------------|
| 12.5/80-15.3 RF | 12PR | TL | 141/A8        |
| 400/60-15.5     | 14PR | TL | 145/A8        |
| 400/60-15.5     | 16PR | TL | 153 A6/149 A6 |
| 400/60-15.5     | 18PR | TL | 155 A6/151 A6 |
| 500/60-22.5     | 16PR | TL | 163 A8/159 B  |
| 550/60-22.5     | 16PR | TL | 167 A8/163 B  |
| 600/50-22.5     | 16PR | TL | 165 A8/161 B  |



# **SMT-18**



General purpose floatation tire.

·Suitable to use on soft surfaces with nonaggressive pattern.

·Non-aggressive pattern design offers large footprint, reduced soil compaction and ensures perfect balance. ·Resistance against side impacts with strong structure and reinforced sidewall compound.

side impacts ·Absorbs special sidewall compound and grips the soil perfectly and prevents to slide to sides. vehicle ·Strong tread and strong shoulder structure enable high load capacity.



| 400/60-15.5 | 14PR | TL | 145/A8       |
|-------------|------|----|--------------|
| 400/60-15.5 | 16PR | TL | 153/149 A6   |
| 400/60-15.5 | 18PR | TL | 155/151 A6   |
| 500/60-22.5 | 16PR | TL | 163 A8/159 B |
| 550/60-22.5 | 16PR | TL | 167 A8/163 B |
| 600/50-22.5 | 16PR | TL | 165 A8/161 B |
|             |      |    |              |



# **SMT-08**



# General purpose floatation tire.

-Suitable to use on soft surfaces with non-aggressive pattern.
-Non-aggressive pattern design offers large footprint, reduced soil compaction and ensures perfect balance.
-Resistance against side impacts with strong structure and reinforced sidewall compound.

·Absorbs side impacts with its special sidewall compound and grips the soil perfectly and prevents the vehicle to slide to sides. ·Strong tread and strong shoulder structure enable high load capacity.







| 500/60-22.5 | 10PR | TL | 153/141 A8 |
|-------------|------|----|------------|
| 500/60-22.5 | 16PR | TL | 159/147 A8 |
| 550/60-22.5 | 16PR | TL | 167/155 A8 |
| 600/60-22.5 | 16PR | TL | 156/144 A8 |
|             |      |    |            |



### **2017 EDITION**

Starmaxx Agricultural Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.





# **Headquarters - Factory**

Petlas Tire Industry and Trade Kırşehir - Kayseri Devlet Yolu Üzeri Gölhisar Mevkii 7. km Kırşehir / TURKEY T. +90 386 252 65 50 F.+90 386 252 65 70

### Int. Sales & Marketing

Petlas Tire Industry and Trade Kazım Karabekir Cd. Özcan Plaza No.124 06060 Ankara / TURKEY T. +90 312 309 30 30 F.+90 312 310 95 09

### **USA Sales Office**

1111 E. Lincolnway STE 205 Cheyenne, WY 82001 USA

www.starmaxx.com

**MADE IN TURKEY** 

